INCH-POUND

MIL-M-28787/38B
AMENDMENT 2
31 December 1992
SUPERSEDING
AMENDMENT 1
28 December 1982

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

RELAY, DPDT, POWER, KEY CODE NPM

This amendment forms a part of Military Specification MIL-M-28787/38B(EC), dated 14 November 1978, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

*1.2, lines 6 through 9: Delete and substitute the following:

"Failure rate Electrical/mechanical failure rate
1.35 failures/10^6 hours maximum"

Bottom of page: Delete "FSC MISC" and substitute "FSC 5963".

PAGE 4

3.5.8, second line: Delete "M28787/38" and substitute "M28787/38-1".

4.3: Delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:37Z
Check the source to verify that this is the current version before use.

PAGE 9

Add new paragraph 6.3 as follows:

"6.3 Cross reference of classification. Military Specification MIL-M-28787/38 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2658734. Part number M28787/38-1 supersedes part numbers 2658734 and M28787/38."

PAGE 13

FIGURE 5: Delete and substitute new figure 5 as printed on page 3 of this amendment.

PAGES 24 AND 25

*FIGURE 9: Delete and substitute new figure 9 as printed on pages 4 and 5 of this amendment.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Preparing activity:
Navy - NW

(Project 5963-0101)

Review Activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:37Z
Check the source to verify that this is the current version before use.

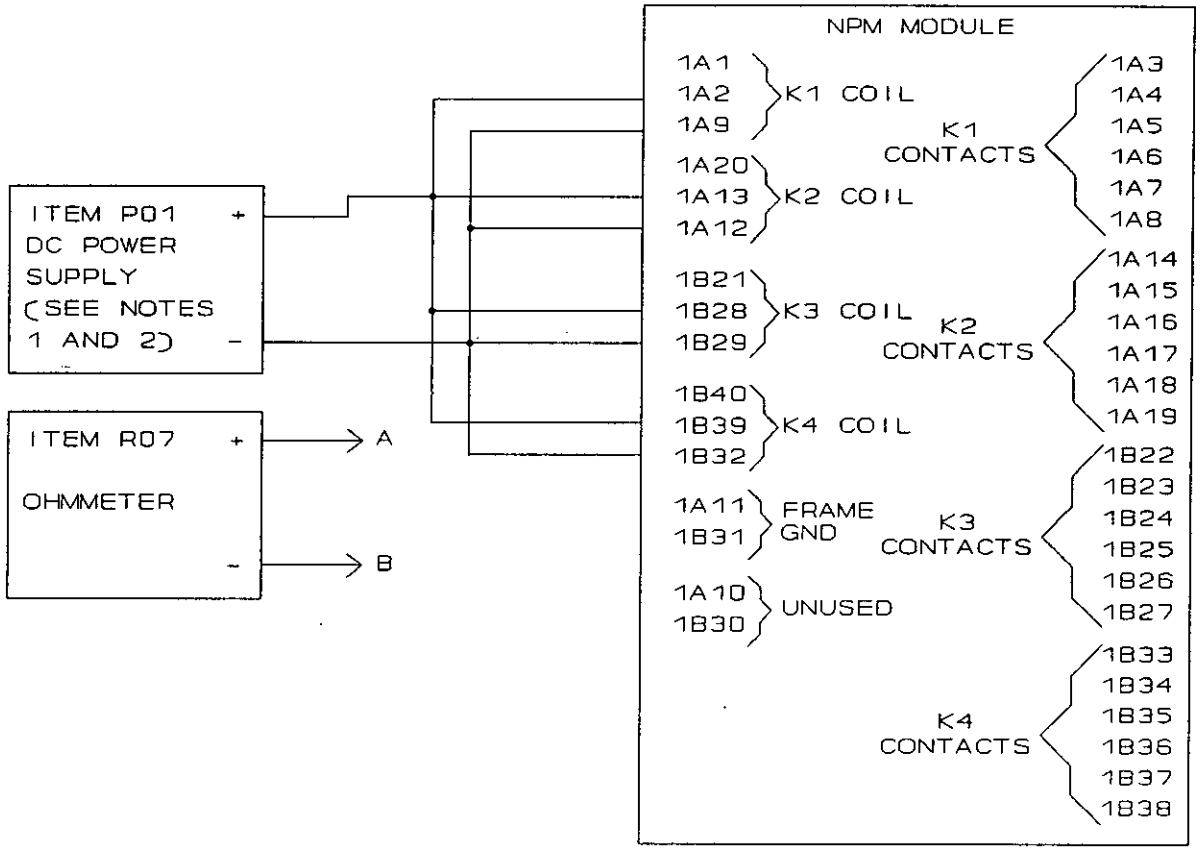

NOTES:
1. For measurement of test conditions B1-B8, item P01 shall be adjusted to 0.8 ± 0.1 Vdc.
2. For measurement of test conditions B9-B16, item P01 shall be adjusted to 4.5 ± 0.1 Vdc.

FIGURE 5. Open contact resistance test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:37Z
Check the source to verify that this is the current version before use.

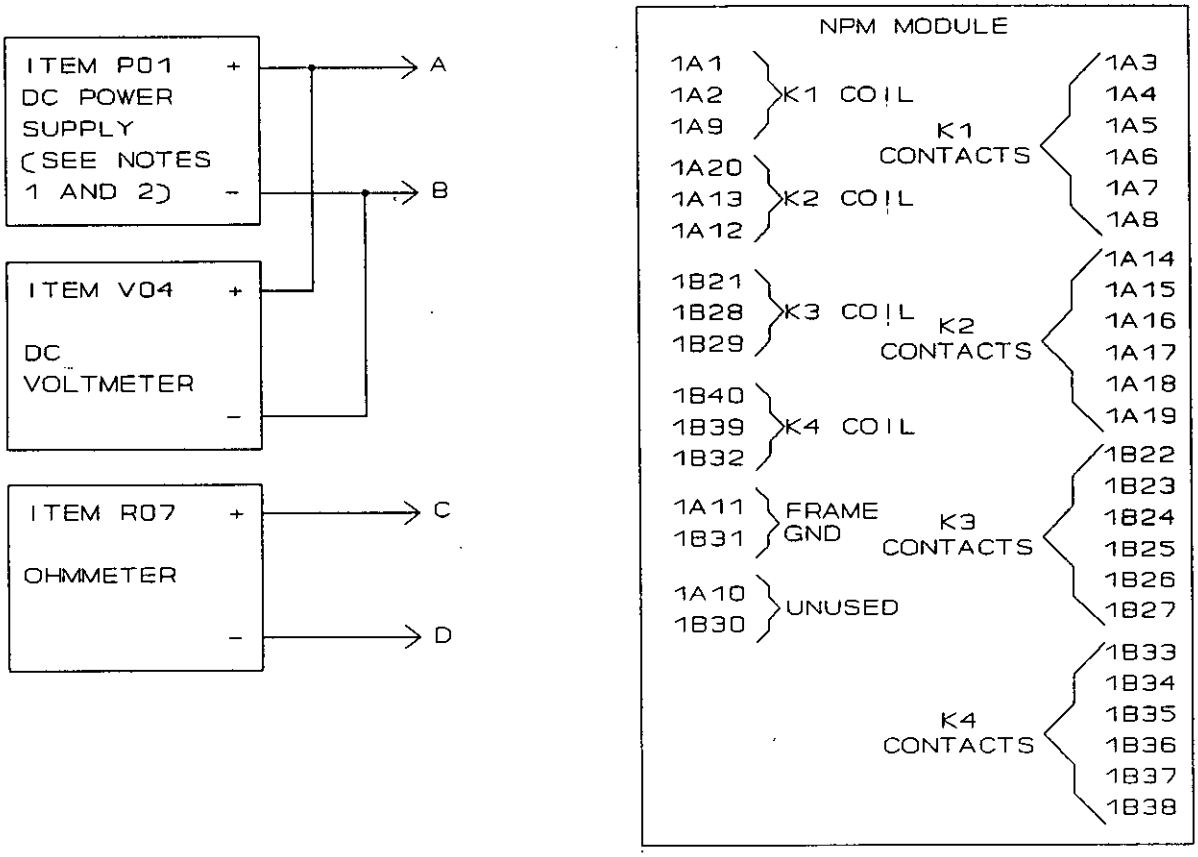


FIGURE 9. Pick-up and drop-out voltage test circuit for tables IX and X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:37Z
Check the source to verify that this is the current version before use.

NOTES:

1. Test procedure for test conditions H1-H8:
   (a) Connect test points A, B, C, and D as specified for test condition H1.
   (b) Adjust output of item P01 for 8.0 Vdc ± 5% as measured on item V04. Maintain this voltage for a period of 1 to 3 seconds.
   (c) Gradually reduce the output voltage of item P01 to zero. The contact resistance, as measured on item R07, should be 1 megohm or greater.
   (d) Gradually increase the output voltage of item P01 until the contact resistance, as measured on item R07, drops to 1 ohm or less.
   (e) The pick-up voltage shall be read on item V04, and shall be as specified for test condition H1.
   (f) Repeat notes (a) through (e) for test conditions H2-H8.

2. Test procedure for test conditions J1-J8:
   (a) Connect test points A, B, C, and D as specified for test condition J1.
   (b) Adjust output of item P01 for 8.0 Vdc ± 5% as measured on item V04. The contact resistance, as measured on item R07, should be 1 megohm or greater.
   (c) Gradually reduce the output voltage of item P01 until the contact resistance, as measured on item R07, drops to 1 ohm or less.
   (d) The drop-out voltage shall be read on item V04, and shall be as specified for test condition J1.
   (e) Repeat notes (a) through (d) for test conditions J2-J8.

FIGURE 9. Pick-up and drop-out voltage test circuit for tables IX and X - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:37Z
Check the source to verify that this is the current version before use.