INCH-POUND

MIL-M-28787/41B(SH)
AMENDMENT 2
8 March 1991
SUPERSEDING
AMENDMENT 1
5 March 1984

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

FLIP-FLOP, JK, DIGITAL, KEY CODE EBL

This amendment forms a part of Military Specification MIL-M-28787/41B(EC), dated 31 January 1983, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

PAGE 4

* TABLE I, Test conditions D1-D12, Test type column Delete "X" and substitute "S"

PAGE 5

TABLE I, Test conditions P1-P12, Min columns Delete "10" (five places) and substitute "5" (five places)

TABLE I, Test conditions P13-P24, Min columns Delete "10" (five places) and substitute "5" (five places)

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:39Z
Check the source to verify that this is the current version before use.

PAGE 7

* 4.4.2 Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through AA shall be performed in any order with the following exceptions. Test conditions A, B, C, D, and E are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, D, or E are part of a sequence of tests, the order of testing shall be as follows: A, B, C, D, and E where applicable, followed by the remaining tests in the sequence."

4.5.1, fifth line: Delete "D" and substitute "F".

* 4.5.3, third line: Delete "D" and substitute "F".

* 4.5.3, sixth line: Delete "D" and substitute "F".

PAGES 44 and 45

TABLE XIII, Test conditions P1-P24, Min column: Delete "10" (two places) and substitute "5" (two places).

PAGE 62

* FIGURE 23. Delete and substitute new figure 23 as printed on page 3 of this amendment.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - SH

(Project 5961-N764)

Agent: NS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:39Z
Check the source to verify that this is the current version before use.

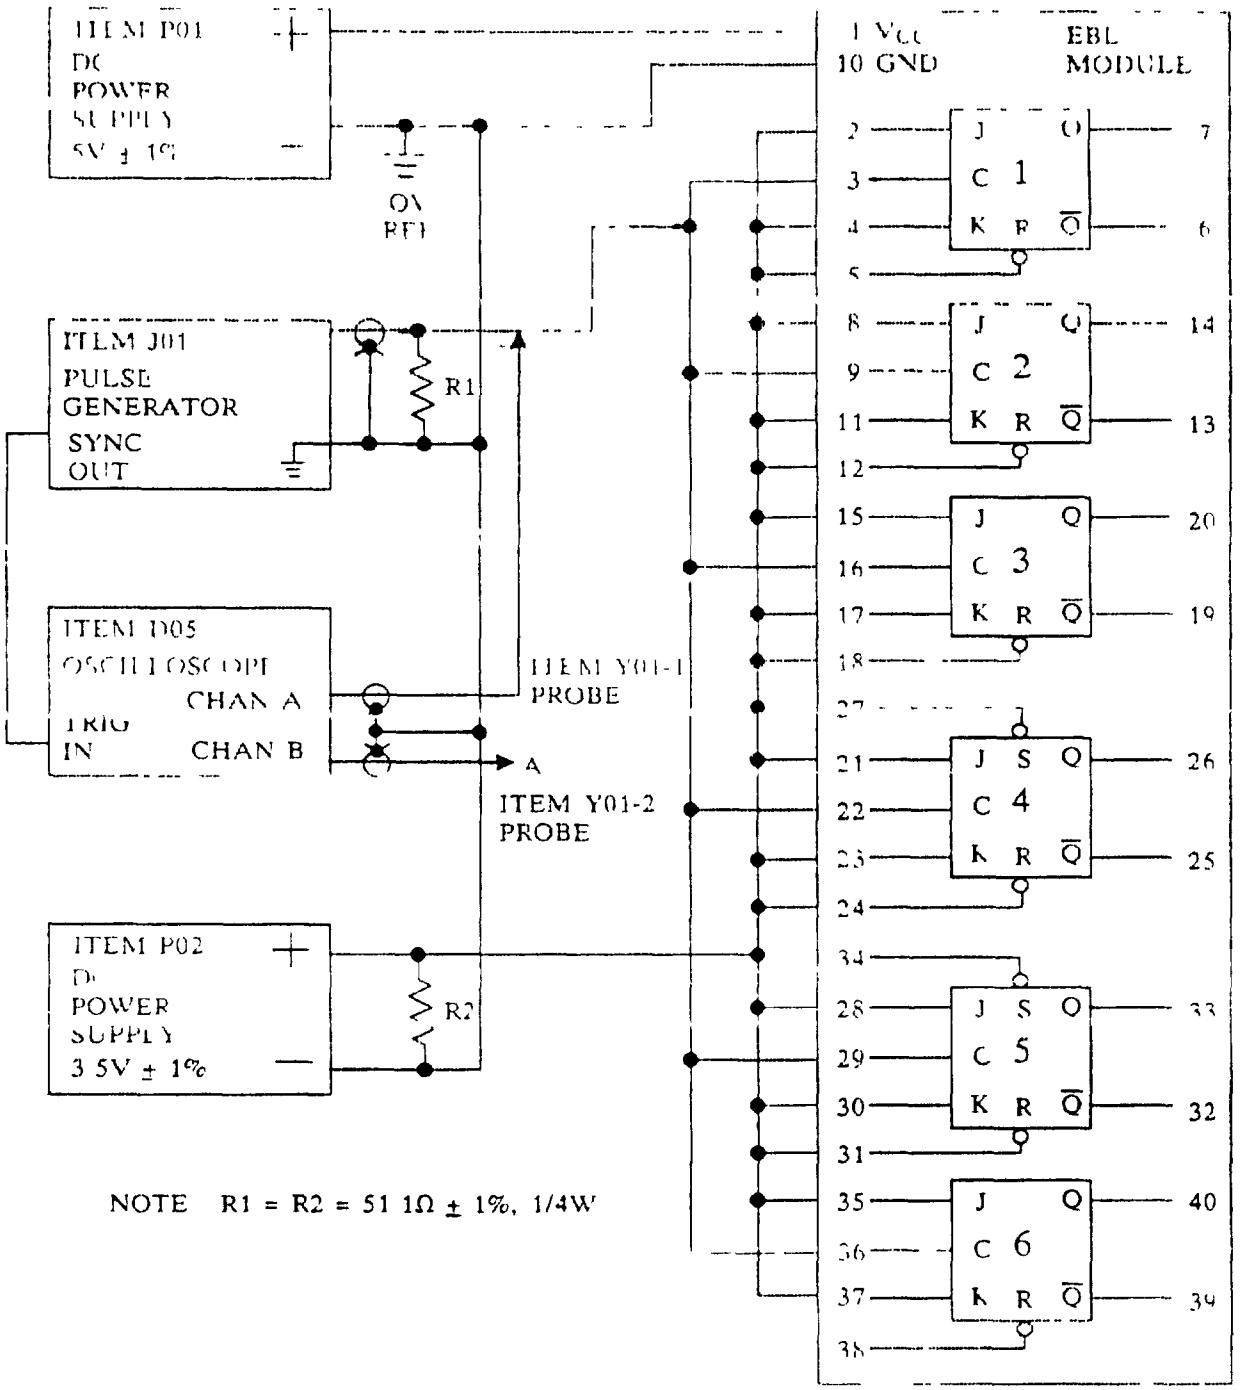


FIGURE 23. Power supply transient amplitude test circuit for table XVII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:39Z
Check the source to verify that this is the current version before use.