INCH-POUND

MIL-M-28787/42B(SH)
AMENDMENT 2
19 March 1992

SUPERSEDING
AMENDMENT 1
20 September 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

COMPARATOR, MAGNITUDE, DIGITAL, KEY CODE JBK

This amendment forms a part of Military Specification MIL-M-28787/42B(EC), dated 14 May 1982, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

* TABLE I, Test conditions G1-G7, Test type column: Delete "X" and substitute "S".

* TABLE I, Test condition column: Delete "P4-P39" and substitute "P4-P19, P24-P27, P32-P39".

* TABLE I, After test conditions P4-P19, P24-P27, P32-P39 insert the following: "|P20-P23, P28-P31| Propagation delay time (t_{PLH}) C_L = 50pF |IX|S|10|200|10|200|10|220|10|220|ns|".

PAGE 6

* 4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through X shall be performed in any order with the following exceptions. Test conditions A, B, C, and G are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, or G are part of a sequence of tests, the order of testing shall be as follows: A, B, C, and G where applicable, followed by the remaining tests in the sequence."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:39Z
Check the source to verify that this is the current version before use.

* 4.5.1, fifth line: Delete "W" and substitute "F, and H through W".

* 4.5.3, third line: Delete "W" and substitute "F, and H through W".

* 4.5.3, sixth line: Delete "X" and substitute "F, and H through W".

PAGE 15

FIGURE 5: Delete and substitute new figure 5 as printed on page 3 of this amendment.

PAGE 32

TABLE VII, footnote 2, first line: Delete "voltmeter V03" and substitute "item M02".

PAGE 33

FIGURE 9: Delete and substitute new figure 9 as printed on page 4 of this amendment.

PAGE 41

* TABLE IX, Test conditions P20-P23, Max column: Delete "150" and substitute "200".

* TABLE IX, Test conditions P24-P27, Max column: Insert "150".


* TABLE IX, Test conditions P28-P30, Max column: Delete "150" and substitute "200".

PAGE 42

* TABLE IX, Test condition P31, Max column: Delete "150" and substitute "200".

* TABLE IX, Test conditions P32-P39, Max column: Insert "150".


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:39Z
Check the source to verify that this is the current version before use.

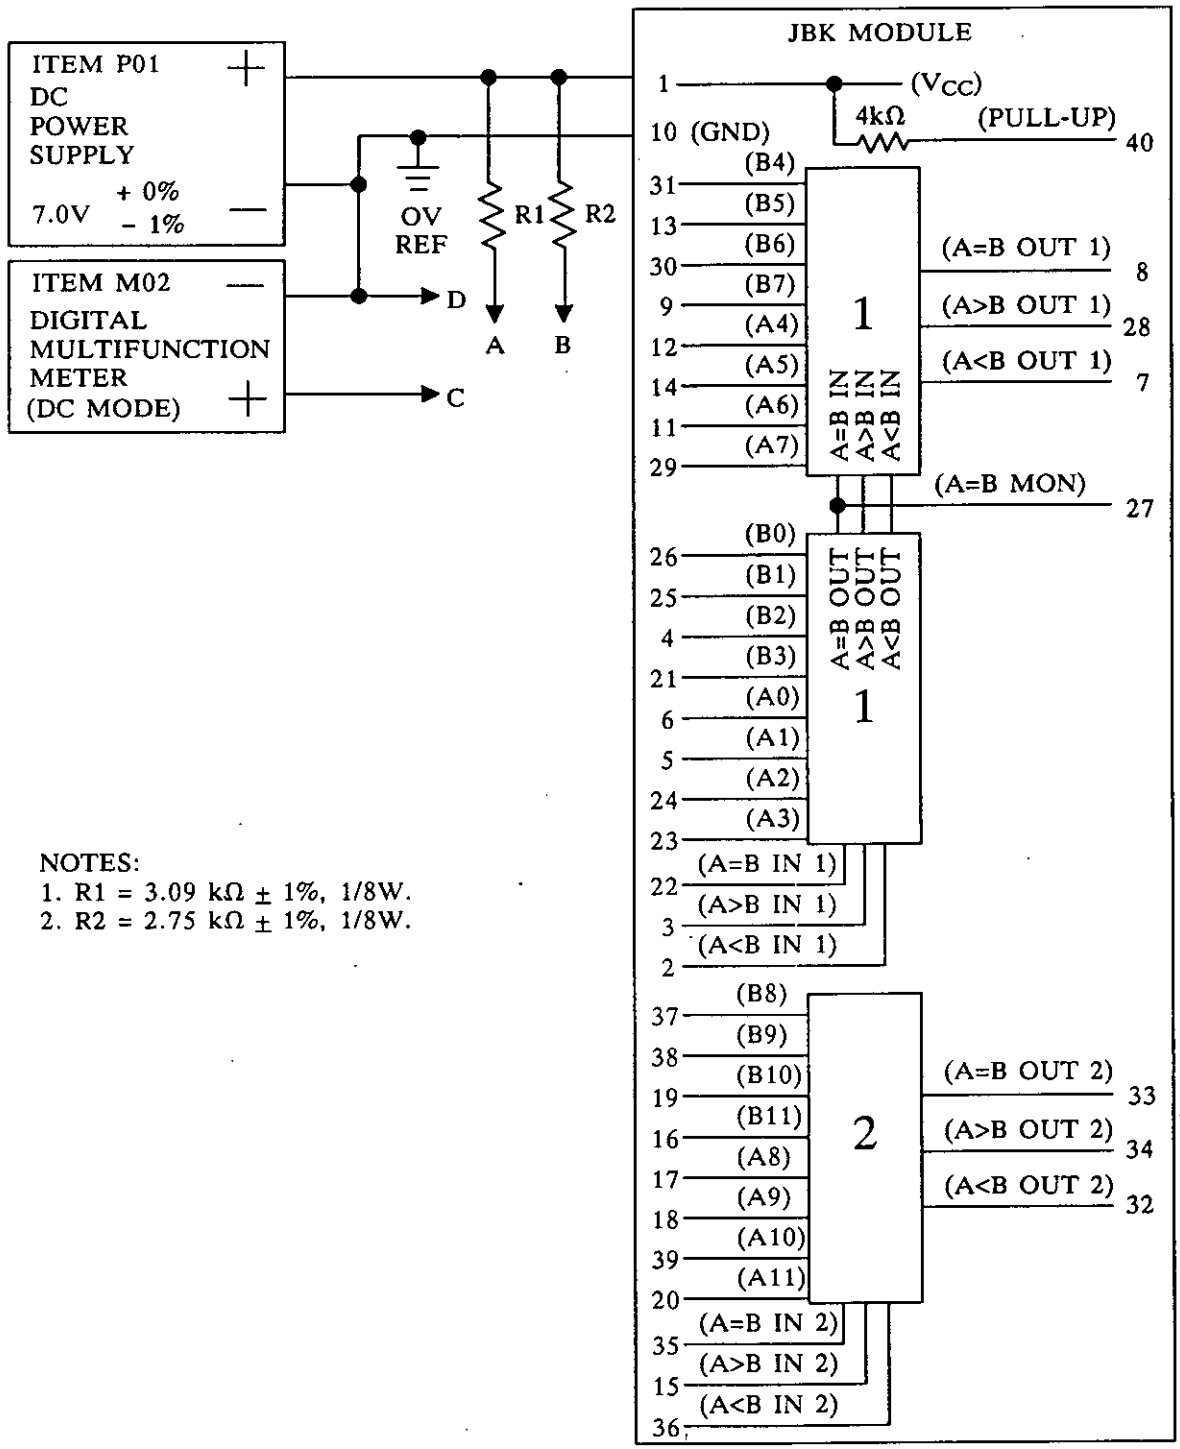

NOTES:
1. R1 = 3.09 kΩ ± 1%, 1/8W.
2. R2 = 2.75 kΩ ± 1%, 1/8W.

FIGURE 5. V_{OUT} (low-loaded) test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:39Z
Check the source to verify that this is the current version before use.

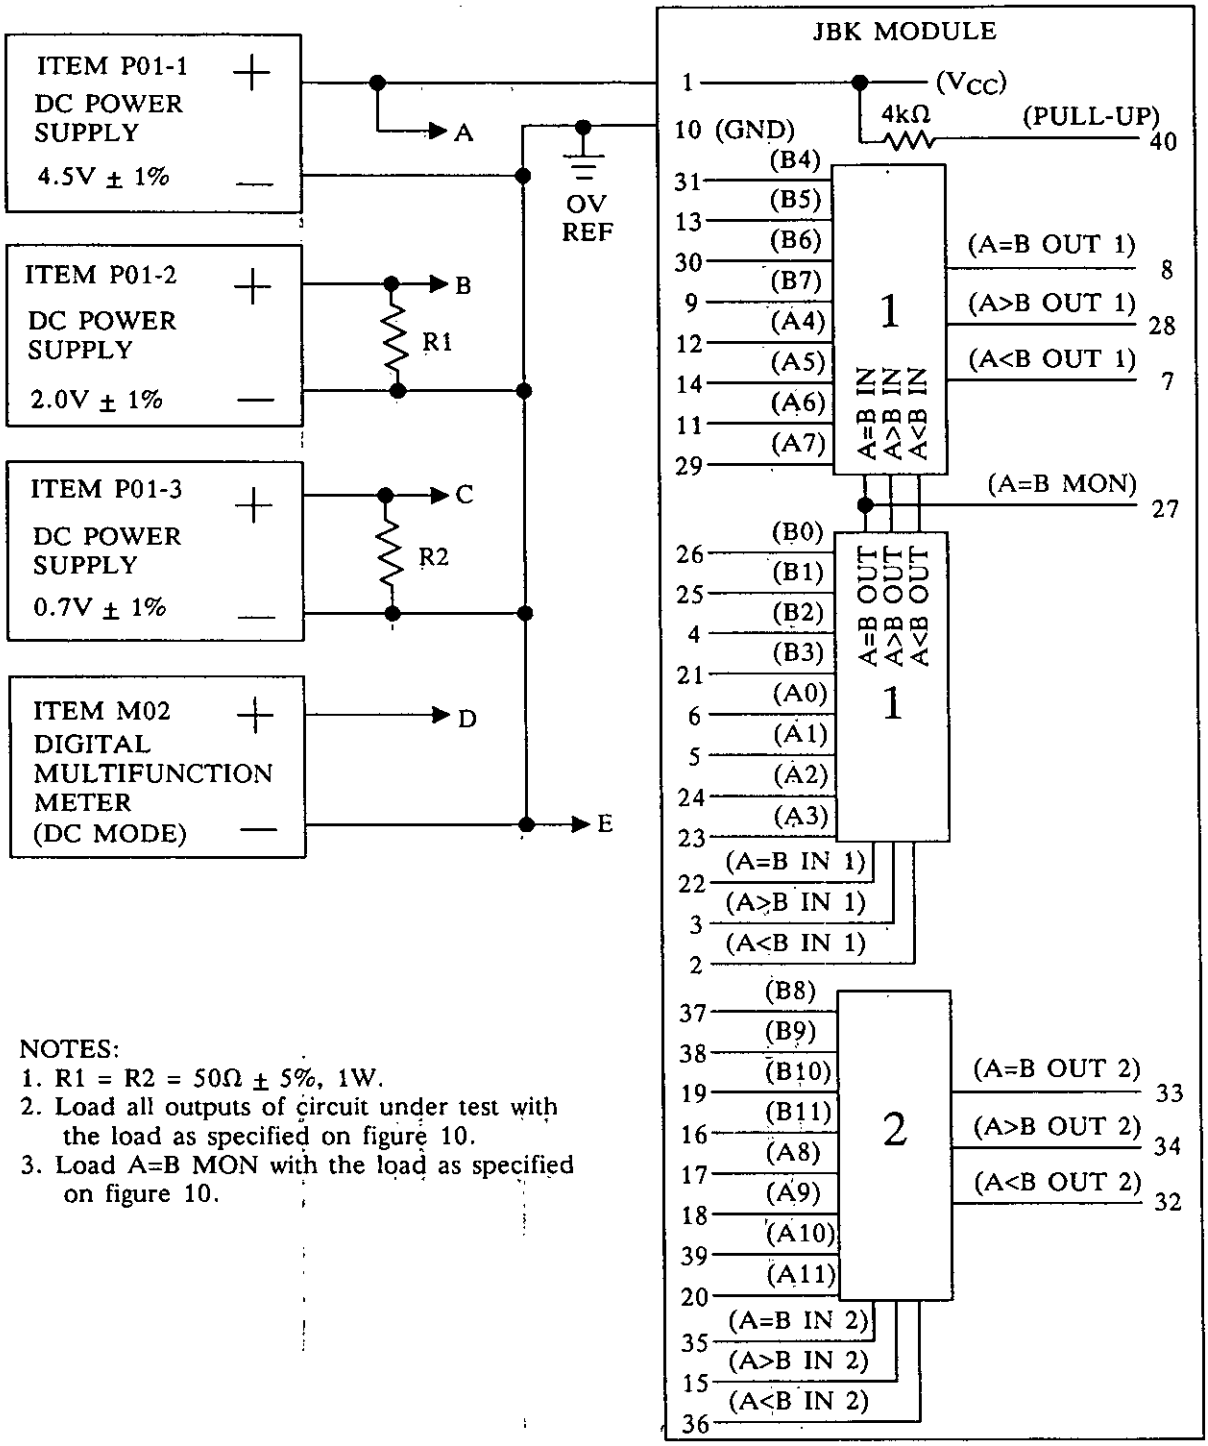

NOTES:
1. R1 = R2 = 50Ω ± 5%, 1W.
2. Load all outputs of circuit under test with the load as specified on figure 10.
3. Load A=B MON with the load as specified on figure 10.

FIGURE 9. Functional compare and output voltage (high-level and low-level) test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:39Z
Check the source to verify that this is the current version before use.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - SH

(Project 5963-N765)

Agent: NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:39Z
Check the source to verify that this is the current version before use.