MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

LATCH, DIGITAL, KEY CODE GBL

This amendment forms a part of Military Specification MIL-M-28787/44B(EC), dated 4 August 1982, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test condition A1-A16, Min columns: Delete "100" (four places) and substitute "0" (four places).

PAGE 13

FIGURE 3: Delete and substitute new figure 3 as printed on page 2 of this amendment.

PAGE 16

TABLE III, Test conditions A1 through A16, Min column: Delete "100" and substitute "0".

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N641)

Source: https://assist.dla.mil - Downloaded: 2026-10-20T15:40Z
Check the source to verify that this is the current version before use.

FSC 5963

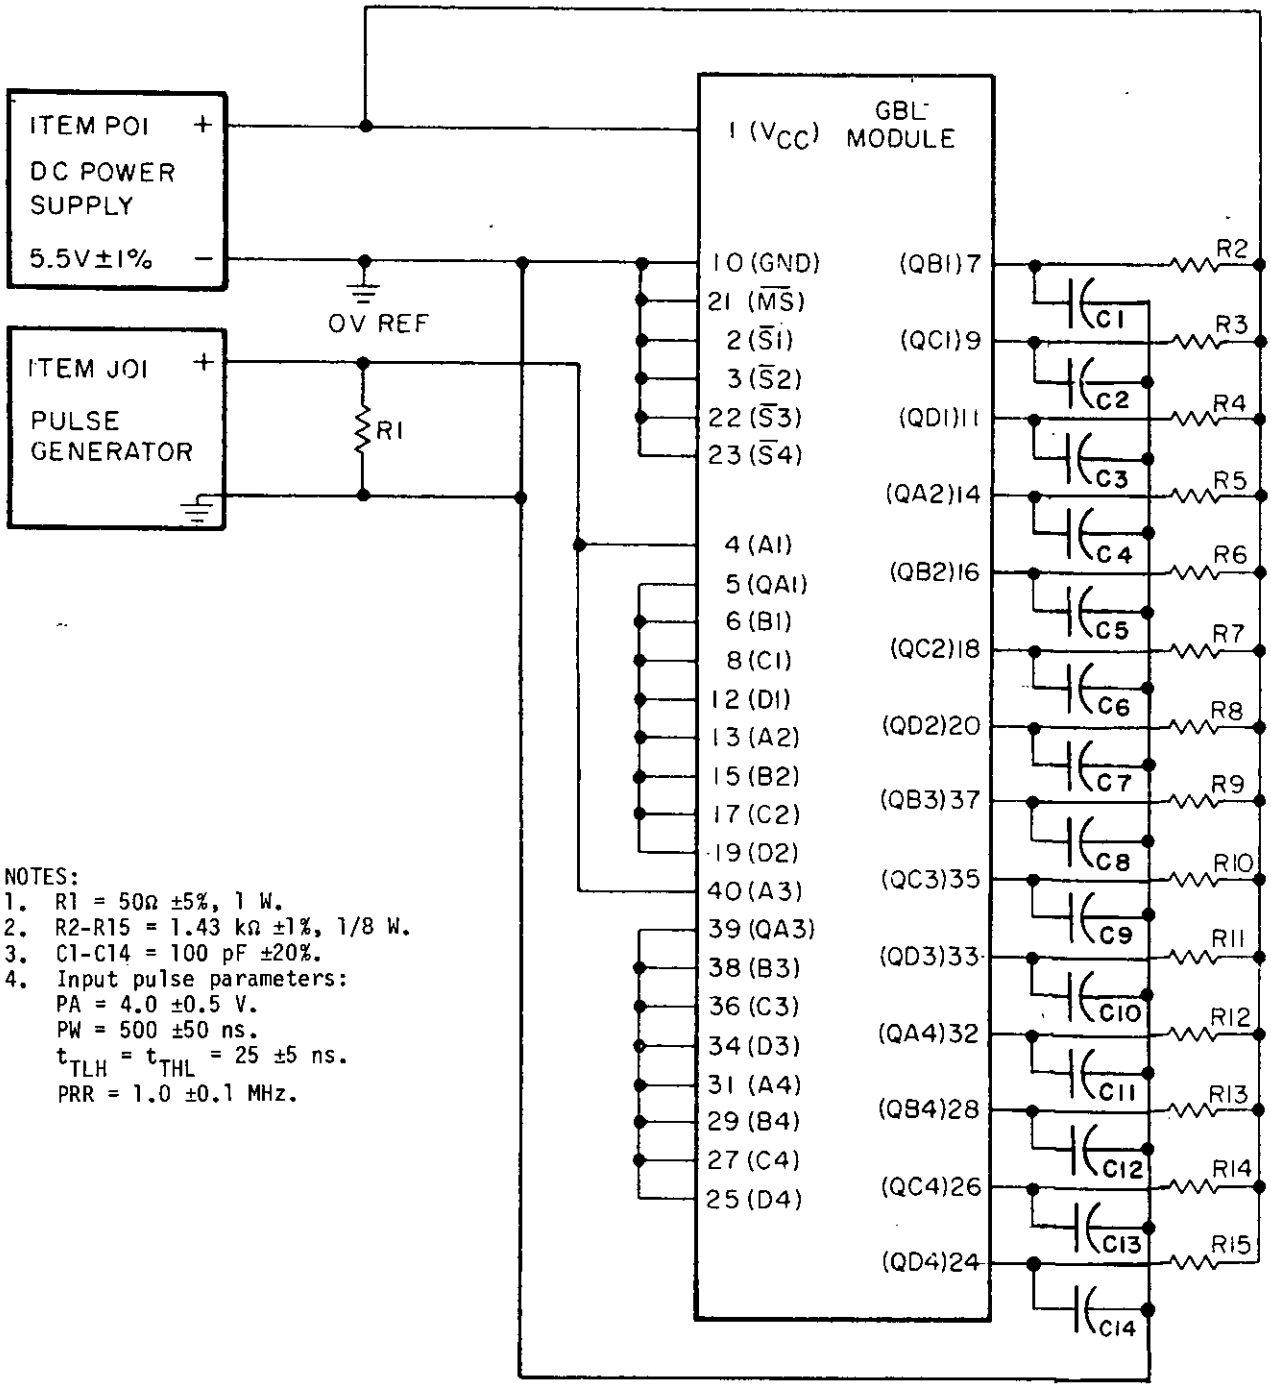

NOTES:
1. R1 = 50Ω ±5%, 1 W.
2. R2-R15 = 1.43 kΩ ±1%, 1/8 W.
3. C1-C14 = 100 pF ±20%.
4. Input pulse parameters:
   PA = 4.0 ±0.5 V.
   PW = 500 ±50 ns.
   $t_{TLH} = t_{THL}$ = 25 ±5 ns.
   PRR = 1.0 ±0.1 MHz.

FIGURE 3. Operating temperature and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:40Z
Check the source to verify that this is the current version before use.