INCH-POUND

MIL-M-28787/44B
AMENDMENT 2
31 December 1992
SUPERSEDING
AMENDMENT 1
15 February 1985

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

LATCH, DIGITAL, KEY CODE GBL

This amendment forms a part of Military Specification MIL-M-28787/44B(EC), dated 4 August 1982, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test conditions A1-A16, Min columns: Delete "100" (four places) and substitute "0" (four places).

*TABLE I, Test conditions G1-G16, Test type column: Delete "X" and substitute "S".

PAGE 8

*4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through PP shall be performed in any order with the following exceptions. Test conditions A, B, C, D, and G are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, D, or G are part of a sequence of tests, the order of testing shall be as follows: C, A, B, D, and G where applicable, followed by the remaining tests in the sequence."

*4.5.1, line 5: Delete "D through NN" and substitute "E, F, and H through NN".

*4.5.3, line 3: Delete "D through NN" and substitute "E, F, and H through NN".

*4.5.3, line 6: Delete "D through PP" and substitute "E, F, and H through PP".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-20T15:40Z
Check the source to verify that this is the current version before use.

PAGE 13

FIGURE 3: Delete and substitute new figure 3 as printed on page 3 of this amendment.

PAGE 16

TABLE III, Test conditions A1 through A16, Min column: Delete "100" and substitute "0".

PAGE 67

*FIGURE 20, Item C01 box: Delete "C01" and substitute "C06".

*FIGURE 20, NOTE, first line: Delete "C01" and substitute "C06".

*FIGURE 20, NOTE, second line: Delete "Frequency = 120 Hz." and substitute "Frequency = 1 KHz."

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0104)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:40Z
Check the source to verify that this is the current version before use.

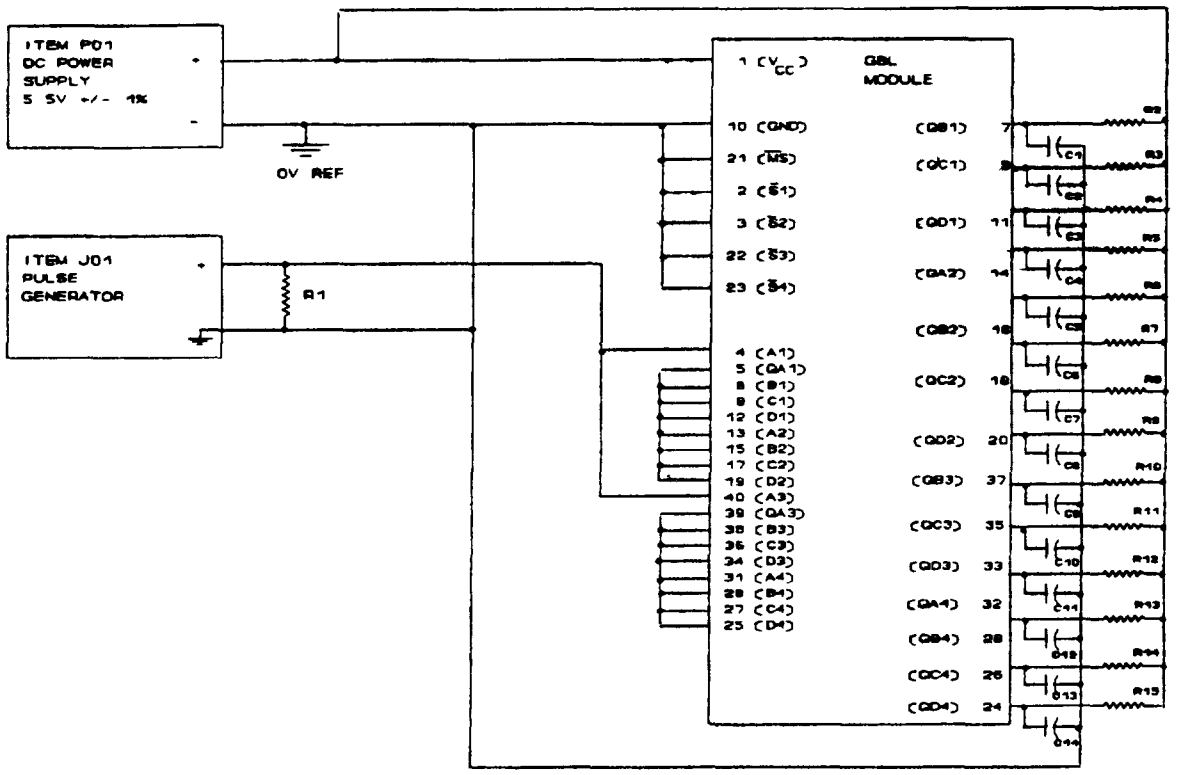

NOTES:

1. R1 = 50Ω ± 5%, 1 W.
2. R2-R15 = 1.43 kΩ ± 1%, 1/8 W.
3. C1-C14 = 100 pF ± 20%.
4. Input pulse parameters: PA = 4.0 ± 0.5 V.
   PW = 500 ± 50 ns.
   $t_{TLH} = t_{THL}$ = 25 ± 5 ns.
   PRR = 1.0 ± 0.1 MHz.

FIGURE 3. Operating temperature and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 202640-20T15:40Z
Check the source to verify that this is the current version before use.