INCH-POUND
MIL-PRF-19978/10B
6 September 2002
SUPERSEDING
MIL-PRF-19978/10A
27 May 1999

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, PLASTIC (OR PAPER-PLASTIC) DIELECTRIC, AXIAL-WIRE TERMINAL, TANGENTIAL RETAINER, TUBULAR (UNINSULATED) (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CQR12

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19978.

FAILURE RATE LEVEL "L" IS INACTIVE FOR NEW DESIGN AFTER 14 SEPTEMBER 1983.

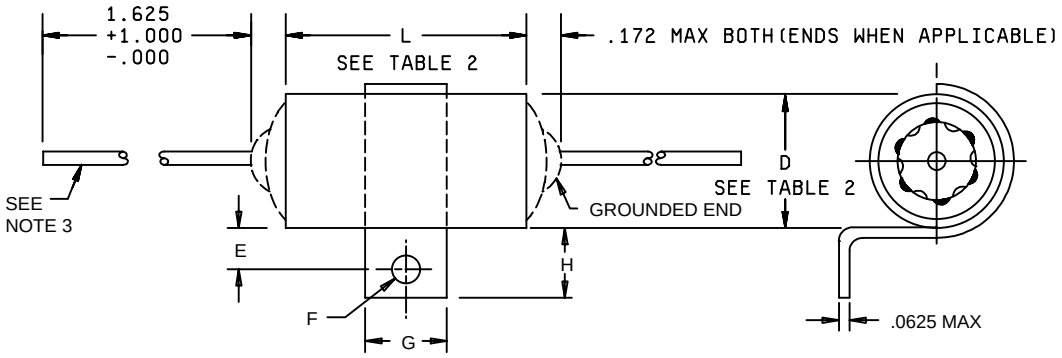

Inches	mm	Inches	mm	Inches	mm
.001	.03	.0625	1.59	.312	7.92
.004	.10	.144	3.66	.400	10.16
.005	.13	.156	3.96	.438	11.13
.025	.64	.172	4.37	.500	12.70
.031	.79	.188	4.78	.562	14.27
.032	.81	.235	5.97	1.000	25.40
.062	1.57	.250	6.35	1.625	41.38

Case dimension D	H ± .062	G ± .062	E ± .031	F ± .005
Less than .500	.312	.250	.188	.144
.500 and up	.438	.500	.250	.156

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Leads shall be of tinned solid wire, .025(No. 22 AWG) for cases .235 and .312 in diameter; and .032(No. 20 AWG) for cases .400 diameter and above. Tolerance on all lead wire diameters shall be +.004, -.001.

FIGURE 1. Style CQR12 capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table II.

Case material: Nonmagnetic (end seal may be of magnetic material).

Terminals: Axial-wire lead (see figure 1).



Rated voltage: See table II.

Rated temperature: -65° to +125°C.

Capacitance (Cap.) (nom): See table II.

Capacitance tolerance: See table II.

Dissipation factor (DF) (max): 1.0 percent.

Failure rate level: In accordance with MIL-PRF-19978.

Reliability: In accordance with MIL-PRF-19978.

Burn-in: In accordance with MIL-PRF-19978.

Radiographic inspection: In accordance with MIL-PRF-19978.

Seal: Method 112 of MIL-STD-202, test condition letter A.

Barometric pressure: In accordance with MIL-PRF-19978.

Test points:

Circuit diagram 1: Between terminals and case.

Circuit diagram 3: Between ungrounded terminal and case.

Insulation resistance (IR):

Terminal to terminal: See table I.

Terminal to case: Greater than 10,000 megohms.

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B, with the following exception:

Direction and duration of motion: 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Salt spray: In accordance with MIL-PRF-19978.

Solderability: In accordance with MIL-PRF-19978.

Terminal strength: Method 211 of MIL-STD-202, test condition letter D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

TABLE I. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
Characteristic K	
	At 25°C
0 to 0.6 microfarad	25,000 megohms
Greater than 0.6 microfarad	15,000 megohm-microfarads 1/
	At 125°C
0 to 0.08 microfarad	250 megohms
Greater than 0.08 microfarad	20 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

TABLE II. STYLE CQR12 capacitors.

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions			
					Circuit 1		Circuit 3	
					L ±.031	D +.015, -.005	L ±.031	D +.015 -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR12A-KC392-3-	200	.0039	G, J, K	L, M, P, R, S	.750	.235	.688	.235
CQR12A-KC472-3-	200	.0047	G, J, K	L, M, P, R, S	.750	.235	.688	.235
CQR12A-KC562-3-	200	.0056	G, J, K	L, M, P, R, S	.750	.235	.688	.235
CQR12A-KC682-3-	200	.0068	G, J, K	L, M, P, R, S	.750	.235	.688	.235
CQR12A-KC183-3-	200	.018	G, J, K	L, M, P, R, S	.875	.312	.812	.312
CQR12A-KC223-3-	200	.022	G, J, K	L, M, P, R, S	.875	.312	.812	.312
CQR12A-KC273-3-	200	.027	G, J, K	L, M, P, R, S	.875	.312	.812	.312
CQR12A-KC333-3-	200	.033	G, J, K	L, M, P, R, S	.875	.312	.812	.312
CQR12A-KC393-3-	200	.039	G, J, K	L, M, P, R, S	.875	.400	.812	.400
CQR12A-KC473-3-	200	.047	G, J, K	L, M, P, R, S	.875	.400	.812	.400
CQR12A-KC563-3-	200	.056	G, J, K	L, M, P, R, S	.875	.400	.812	.400
CQR12A-KC683-3-	200	.068	G, J, K	L, M, P, R, S	.875	.400	.812	.400
CQR12A-KC823-3-	200	.082	G, J, K	L, M, P, R, S	1.125	.400	1.062	.400
CQR12A-KC104-3-	200	.10	G, J, K	L, M, P, R, S	1.125	.400	1.062	.400
CQR12A-KC124-3-	200	.12	G, J, K	L, M, P, R, S	1.375	.400	1.312	.400
CQR12A-KC154-3-	200	.15	G, J, K	L, M, P, R, S	1.375	.400	1.312	.400
CQR12A-KC184-3-	200	.18	G, J, K	L, M, P, R, S	1.125	.562	1.062	.562
CQR12A-KC224-3-	200	.22	G, J, K	L, M, P, R, S	1.125	.562	1.062	.562
CQR12A-KC274-3-	200	.27	G, J, K	L, M, P, R, S	1.375	.562	1.312	.562
CQR12A-KC334-3-	200	.33	G, J, K	L, M, P, R, S	1.375	.562	1.312	.562
CQR12A-KC394-3-	200	.39	G, J, K	L, M, P, R, S	1.625	.562	1.562	.562
CQR12A-KC474-3-	200	.47	G, J, K	L, M, P, R, S	1.625	.562	1.562	.562
CQR12A-KC564-3-	200	.56	G, J, K	L, M, P, R, S	1.625	.670	1.562	.670
CQR12A-KC684-3-	200	.68	G, J, K	L, M, P, R, S	1.625	.670	1.562	.670
CQR12A-KC824-3-	200	.82	G, J, K	L, M, P, R, S	2.125	.750	2.062	.750
CQR12A-KC105-3-	200	1.000	G, J, K	L, M, P, R, S	2.125	.750	2.062	.750
CQR12A-KE272-3-	400	.0027	G, J, K	L, M, P, R, S	.750	.235	.688	.235
CQR12A-KE332-3-	400	.0033	G, J, K	L, M, P, R, S	.750	.235	.688	.235
CQR12A-KE123-3-	400	.012	G, J, K	L, M, P, R, S	.875	.312	.812	.312
CQR12A-KE153-3-	400	.015	G, J, K	L, M, P, R, S	.875	.312	.812	.312
CQR12A-KE273-3-	400	.027	G, J, K	L, M, P, R, S	.875	.400	.812	.400
CQR12A-KE333-3-	400	.033	G, J, K	L, M, P, R, S	.875	.400	.812	.400
CQR12A-KE393-3-	400	.039	G, J, K	L, M, P, R, S	1.125	.400	1.062	.400
CQR12A-KE473-3-	400	.047	G, J, K	L, M, P, R, S	1.125	.400	1.062	.400

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

TABLE II. STYLE CQR12 capacitors - Continued.

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions			
					Circuit 1		Circuit 3	
					L ±.031	D +.015, -.005	L ±.031	D +.015 -.005
CQR12A-KE563-3-	400	.056	G, J, K	L, M, P, R, S	1.375	.400	1.312	.400
CQR12A-KE683-3-	400	.068	G, J, K	L, M, P, R, S	1.375	.400	1.312	.400
CQR12A-KE823-3-	400	.082	G, J, K	L, M, P, R, S	1.125	.562	1.062	.562
CQR12A-KE104-3-	400	.10	G, J, K	L, M, P, R, S	1.125	.562	1.062	.562
CQR12A-KE124-3-	400	.12	G, J, K	L, M, P, R, S	1.375	.562	1.312	.562
CQR12A-KE154-3-	400	.15	G, J, K	L, M, P, R, S	1.375	.562	1.312	.562
CQR12A-KE184-3-	400	.18	G, J, K	L, M, P, R, S	1.625	.562	1.562	.562
CQR12A-KE224-3-	400	.22	G, J, K	L, M, P, R, S	1.625	.562	1.562	.562
CQR12A-KE274-3-	400	.27	G, J, K	L, M, P, R, S	1.625	.670	1.562	.670
CQR12A-KE334-3-	400	.33	G, J, K	L, M, P, R, S	1.625	.670	1.562	.670
CQR12A-KE394-3-	400	.39	G, J, K	L, M, P, R, S	2.125	.750	2.062	.750
CQR12A-KE474-3-	400	.47	G, J, K	L, M, P, R, S	2.125	.750	2.062	.750
CQR12A-KF102-3-	600	.0010	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KF122-3-	600	.0012	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KF152-3-	600	.0015	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KF182-3-	600	.0018	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KF222-3-	600	.0022	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KF272-3-	600	.0027	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF332-3-	600	.0033	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF392-3-	600	.0039	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF472-3-	600	.0047	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF562-3-	600	.0056	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF682-3-	600	.0068	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF822-3-	600	.0082	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF103-3-	600	.010	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF123-3-	600	.012	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KF153-3-	600	.015	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KF183-3-	600	.018	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KF223-3-	600	.022	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KF273-3-	600	.027	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KF333-3-	600	.033	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KF393-3-	600	.039	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KF473-3-	600	.047	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KF563-3-	600	.056	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KF683-3-	600	.068	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KF823-3-	600	.082	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KF104-3-	600	.10	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KF124-3-	600	.12	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KF154-3-	600	.15	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KF184-3-	600	.18	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KF224-3-	600	.22	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KF274-3-	600	.27	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KF334-3-	600	.33	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KF394-3-	600	.39	G, J, K	M, P, R, S	2.375	.750	2.312	.750
CQR12A-KF474-3-	600	.47	G, J, K	M, P, R, S	2.375	.750	2.312	.750
CQR12A-KG102-3-	1000	.0010	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG122-3-	1000	.0012	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG152-3-	1000	.0015	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG182-3-	1000	.0018	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG222-3-	1000	.0022	G, J, K	M, P, R, S	.875	.400	.812	.400

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

* TABLE II. STYLE CQR12 capacitors - Continued.

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions			
					Circuit 1		Circuit 3	
					L ±.031	D +.015, -.005	L ±.031	D +.015 -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR12A-KG272-3-	1000	.0027	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG332-3-	1000	.0033	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG392-3-	1000	.0039	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG472-3-	1000	.0047	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG562-3-	1000	.0056	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG682-3-	1000	.0068	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG822-3-	1000	.0082	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG103-3-	1000	.010	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG123-3-	1000	.012	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KG153-3-	1000	.015	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KG183-3-	1000	.018	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KG223-3-	1000	.022	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KG273-3-	1000	.027	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KG333-3-	1000	.033	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KG393-3-	1000	.039	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KG473-3-	1000	.047	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KG563-3-	1000	.056	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KG683-3-	1000	.068	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KG823-3-	1000	.082	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KG104-3-	1000	.10	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KG124-3-	1000	.12	G, J, K	M, P, R, S	1.875	.670	1.812	.670
CQR12A-KG154-3-	1000	.15	G, J, K	M, P, R, S	1.875	.670	1.812	.670
CQR12A-KG184-3-	1000	.18	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KG224-3-	1000	.22	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KG274-3-	1000	.27	G, J, K	M, P, R, S	2.125	1.0	2.062	1.000
CQR12A-KG334-3-	1000	.33	G, J, K	M, P, R, S	2.125	1.0	2.062	1.000
CQR12A-KG394-3-	1000	.39	G, J, K	M, P, R, S	2.375	1.0	2.312	1.000
CQR12A-KG474-3-	1000	.47	G, J, K	M, P, R, S	2.375	1.0	2.312	1.000

1/ Complete part number shall include additional symbols to indicate circuit, capacitance tolerance, and failure rate level, as applicable.

TABLE III. Multimeter equivalents of decimal inches.

Inches	mm	Inches	mm	Inches	mm
0.005	0.13	0.688	17.48	1.375	34.93
0.015	0.38	0.750	19.05	1.562	39.67
0.031	0.79	0.812	20.62	1.625	41.28
0.235	5.97	0.875	22.23	2.062	52.37
0.312	7.92	1.000	25.40	2.125	53.98
0.400	10.16	1.062	26.97	2.312	58.72
0.562	14.27	1.125	28.58	2.375	60.33
0.670	17.02	1.312	33.32		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

Stability at low and high temperatures:

Low temperature:

Test temperature: -65°C +0°C, -5°C.

Capacitance change (max): 10 percent.

High temperature:

Test temperature: +125°C +5°C, -0°C.

Capacitance change (max): +10 percent.

Life:

Capacitance change (max): ±5 percent of initial measured value.

Resistance to soldering heat:: In accordance with MIL-PRF-19978.

Changes from previous issue: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11

Review activities:
Navy - MC
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5910-2192)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.