
INCH-POUND
MIL-PRF-19978/10D
19 May 2026
SUPERSEDING
MIL-PRF-19978/10C
20 July 2016

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, PLASTIC (OR PAPER-PLASTIC) DIELECTRIC, AXIAL-WIRE TERMINAL, TANGENTIAL RETAINER, TUBULAR (UNINSULATED) (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CQR12

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19978.

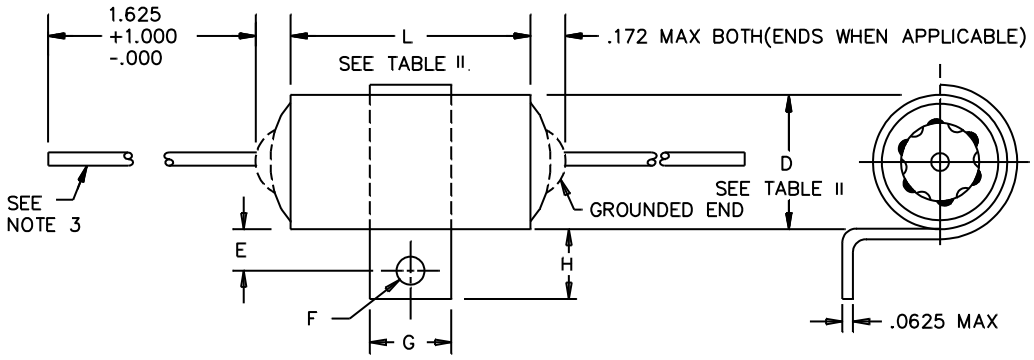

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.062	1.57	.235	5.97	.562	14.27
.004	0.10	.0625	1.59	.250	6.35	1.000	25.40
.005	0.13	.144	3.66	.312	7.92	1.625	41.38
.025	0.64	.156	3.96	.400	10.16		
.031	0.79	.172	4.37	.438	11.13		
.032	0.81	.188	4.78	.500	12.70		

Case dimension D	H ± .062	G ± .062	E ± .031	F ± .005
Less than .500	.312	.250	.188	.144
.500 and up	.438	.500	.250	.156

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.
3. Leads shall be of solder coated solid wire, .025 inch (No. 22 AWG) for cases .235 inch and .312 inch in diameter; and .032 inch (No. 20 AWG) for cases .400 inch diameter and above. Tolerance on all lead wire diameters shall be +.004 inch, -.001 inch.

FIGURE 1. Style CQR12 capacitors.

AMSC N/A
FSC 5910
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:03Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table II.

Case material: Nonmagnetic (end seal may be of magnetic material).

Terminals: Axial-wire lead (see figure 1).



Rated voltage: See table II.

Rated temperature: -65° to +125°C.

Capacitance (Cap.) (nom): See table II.

Capacitance tolerance: See table II.

Dissipation factor (DF) (max): 1.0 percent.

Failure rate level: In accordance with MIL-PRF-19978.

Burn-in: In accordance with MIL-PRF-19978.

Radiographic inspection: In accordance with MIL-PRF-19978.

Seal: MIL-STD-202-112, test condition letter A.

Barometric pressure: In accordance with MIL-PRF-19978.

Test points:

Circuit diagram 1: Between terminals and case.

Circuit diagram 3: Between ungrounded terminal and case.

Insulation resistance (IR):

Terminal to terminal: See table I.

Terminal to case: Greater than 10,000 megohms.

Vibration, high frequency: MIL-STD-202-204, test condition B, with the following exception.

Direction and duration of motion: 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Salt spray (corrosion): In accordance with MIL-PRF-19978.

Solderability: In accordance with MIL-PRF-19978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:03Z
Check the source to verify that this is the current version before use.

TABLE I. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
Characteristic K	
	At +25°C
0 to 0.6 microfarad	25,000 megohms
Greater than 0.6 microfarad	15,000 megohm-microfarads 1/
	At +125°C
0 to 0.08 microfarad	250 megohms
Greater than 0.08 microfarad	20 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

TABLE II. STYLE CQR12 capacitors.

Part or identifying number (PIN) 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D + .015, - .005	L ± .031	D + .015 - .005
	Volts	µF			Inches	Inches	Inches	Inches
CQR12A-KC392-3-	200	.0039	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KC472-3-	200	.0047	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KC562-3-	200	.0056	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KC682-3-	200	.0068	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KC183-3-	200	.018	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KC223-3-	200	.022	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KC273-3-	200	.027	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KC333-3-	200	.033	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KC393-3-	200	.039	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KC473-3-	200	.047	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KC563-3-	200	.056	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KC683-3-	200	.068	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KC823-3-	200	.082	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KC104-3-	200	.10	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KC124-3-	200	.12	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KC154-3-	200	.15	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KC184-3-	200	.18	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KC224-3-	200	.22	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KC274-3-	200	.27	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KC334-3-	200	.33	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KC394-3-	200	.39	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KC474-3-	200	.47	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KC564-3-	200	.56	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KC684-3-	200	.68	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KC824-3-	200	.82	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KC105-3-	200	1.000	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KE272-3-	400	.0027	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KE332-3-	400	.0033	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KE123-3-	400	.012	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KE153-3-	400	.015	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KE273-3-	400	.027	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KE333-3-	400	.033	G, J, K	M, P, R, S	.875	.400	.812	.400

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:03Z
Check the source to verify that this is the current version before use.

TABLE II. STYLE CQR12 capacitors - Continued.

PIN 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D + .015, -.005	L ± .031	D + .015 - .005
	Volts	µF			Inches	Inches	Inches	Inches
CQR12A-KE393-3-	400	.039	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KE473-3-	400	.047	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KE563-3-	400	.056	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KE683-3-	400	.068	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KE823-3-	400	.082	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KE104-3-	400	.10	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KE124-3-	400	.12	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KE154-3-	400	.15	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KE184-3-	400	.18	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KE224-3-	400	.22	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KE274-3-	400	.27	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KE334-3-	400	.33	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KE394-3-	400	.39	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KE474-3-	400	.47	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KF102-3-	600	.0010	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KF122-3-	600	.0012	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KF152-3-	600	.0015	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KF182-3-	600	.0018	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KF222-3-	600	.0022	G, J, K	M, P, R, S	.750	.235	.688	.235
CQR12A-KF272-3-	600	.0027	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF332-3-	600	.0033	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF392-3-	600	.0039	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF472-3-	600	.0047	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF562-3-	600	.0056	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF682-3-	600	.0068	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF822-3-	600	.0082	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF103-3-	600	.010	G, J, K	M, P, R, S	.875	.312	.812	.312
CQR12A-KF123-3-	600	.012	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KF153-3-	600	.015	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KF183-3-	600	.018	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KF223-3-	600	.022	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KF273-3-	600	.027	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KF333-3-	600	.033	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KF393-3-	600	.039	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KF473-3-	600	.047	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KF563-3-	600	.056	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KF683-3-	600	.068	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KF823-3-	600	.082	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KF104-3-	600	.10	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KF124-3-	600	.12	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KF154-3-	600	.15	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KF184-3-	600	.18	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KF224-3-	600	.22	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KF274-3-	600	.27	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KF334-3-	600	.33	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KF394-3-	600	.39	G, J, K	M, P, R, S	2.375	.750	2.312	.750
CQR12A-KF474-3-	600	.47	G, J, K	M, P, R, S	2.375	.750	2.312	.750

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:03Z
Check the source to verify that this is the current version before use.

TABLE II. STYLE CQR12 capacitors - Continued.

PIN 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D + .015, - .005	L ± .031	D + .015 - .005
	Volts	µF			Inches	Inches	Inches	Inches
CQR12A-KG102-3-	1000	.0010	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG122-3-	1000	.0012	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG152-3-	1000	.0015	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG182-3-	1000	.0018	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG222-3-	1000	.0022	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG272-3-	1000	.0027	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG332-3-	1000	.0033	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG392-3-	1000	.0039	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG472-3-	1000	.0047	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG562-3-	1000	.0056	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG682-3-	1000	.0068	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG822-3-	1000	.0082	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG103-3-	1000	.010	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR12A-KG123-3-	1000	.012	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KG153-3-	1000	.015	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR12A-KG183-3-	1000	.018	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KG223-3-	1000	.022	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR12A-KG273-3-	1000	.027	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KG333-3-	1000	.033	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR12A-KG393-3-	1000	.039	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KG473-3-	1000	.047	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR12A-KG563-3-	1000	.056	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KG683-3-	1000	.068	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR12A-KG823-3-	1000	.082	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KG104-3-	1000	.10	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR12A-KG124-3-	1000	.12	G, J, K	M, P, R, S	1.875	.670	1.812	.670
CQR12A-KG154-3-	1000	.15	G, J, K	M, P, R, S	1.875	.670	1.812	.670
CQR12A-KG184-3-	1000	.18	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KG224-3-	1000	.22	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR12A-KG274-3-	1000	.27	G, J, K	M, P, R, S	2.125	1.0	2.062	1.000
CQR12A-KG334-3-	1000	.33	G, J, K	M, P, R, S	2.125	1.0	2.062	1.000
CQR12A-KG394-3-	1000	.39	G, J, K	M, P, R, S	2.375	1.0	2.312	1.000
CQR12A-KG474-3-	1000	.47	G, J, K	M, P, R, S	2.375	1.0	2.312	1.000

1/ Complete PIN shall include additional symbols to indicate circuit, capacitance tolerance, and failure rate level, as applicable.
2/ See table III for metric equivalents.

TABLE III. Millimeter equivalents of decimal inches.

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.688	17.48	1.375	34.93
.015	0.38	.750	19.05	1.562	39.67
.031	0.79	.812	20.62	1.625	41.28
.235	5.97	.875	22.23	2.062	52.37
.312	7.92	1.000	25.40	2.125	53.98
.400	10.16	1.062	26.97	2.312	58.72
.562	14.27	1.125	28.58	2.375	60.33
.670	17.02	1.312	33.32		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:03Z
Check the source to verify that this is the current version before use.

Terminal strength: MIL-STD-202-211, test condition letter D.

Stability at low and high temperatures:

Low temperature:

Test temperature: -65°C +0°C, -5°C.

Capacitance change (max): 10 percent.

High temperature:

Test temperature: +125°C +5°C, -0°C.

Capacitance change (max): +10 percent.

Life:

Capacitance change (max): ± 5 percent of initial measured value.

Resistance to soldering heat: In accordance with MIL-PRF-19978.

Referenced documents: In addition to MIL-PRF-19978, this document references the following:

MIL-STD-202-112
MIL-STD-202-204
MIL-STD-202-211

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2026-028)

Review activities:
Navy - MC
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:03Z
Check the source to verify that this is the current version before use.