
INCH-POUND
MIL-PRF-19978/11E
19 May 2026
SUPERSEDING
MIL-PRF-19978/11D
20 July 2016

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, PLASTIC (OR PAPER-PLASTIC) DIELECTRIC, AXIAL-WIRE THREADED-STUD RETAINER, TUBULAR (UNINSULATED) (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CQR13

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19978.

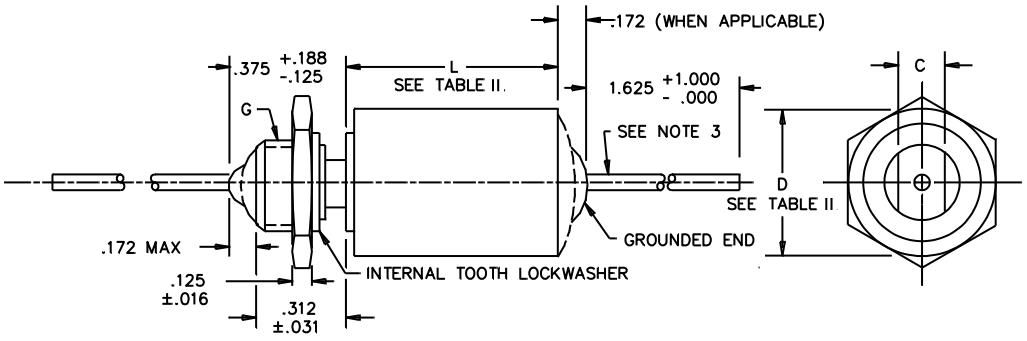

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.125	3.18	.437	11.10
.004	0.10	.172	4.37	.562	14.27
.005	0.13	.188	4.78	.670	17.02
.016	0.41	.250	6.35	.750	19.05
.031	0.79	.312	7.92	1.000	25.40
.032	0.81	.375	9.53	1.625	41.38

Case dimension D	C ± .005	G
.562 or less	.250	5/16-24UNF-2A
.670	.375	7/16-28UNEF-2A
.750 and up	.437	1/2-28UNEF-2A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.
3. Leads shall be of solder coated solid wire, .032 inch +.004 inch, -.001 inch (No. 20 AWG).
4. Mounting nuts and lockwashers shall be supplied.

FIGURE 1. Style CQR13 capacitors.

AMSC N/A
FSC 5910
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Design and construction:

Dimensions and configuration: See figure 1 and table II.

Case material: Nonmagnetic (screwneck and end seal may be of magnetic material).

Terminals: Axial-wire lead (see figure 1).

Circuit diagram:



Rated voltage: See table II.

Rated temperature: -65° to +125°C.

Capacitance (cap.) (nom): See table II.

Capacitance tolerance: See table II.

Dissipation factor (DF) (max): 1.0 percent.

Failure rate level: In accordance with MIL-PRF-19978.

Reliability: In accordance with MIL-PRF-19978.

Burn-in: In accordance with MIL-PRF-19978.

Radiographic inspection: In accordance with MIL-PRF-19978.

Seal: MIL-STD-202-112, test condition letter A.

Barometric pressure: In accordance with MIL-PRF-19978.

Test points:

Circuit diagram 1: Between terminals and case.

Circuit diagram 3: Between ungrounded terminal and case.

Insulation resistance (IR):

Terminal to terminal: See table I.

Terminal to case: Greater than 10,000 megohms.

Vibration, high frequency: MIL-STD-202-204, test condition B, with the following exception.

Direction and duration of motion: 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

Salt spray (corrosion): In accordance with MIL-PRF-19978.

Solderability: In accordance with MIL-PRF-19978.

Terminal strength: MIL-STD-202-211, test condition letter D.

Stability at low and high temperatures:

Low temperature:

Test temperature: -65°C +0°C, -5°C.

Capacitance change (max): -10 percent.

High temperature:

Test temperature: +125°C +5°C, -0°C.

Capacitance change (max): +10 percent.

Life:

Capacitance change (max): ±5 percent of initial measured value.

Resistance to soldering heat: In accordance with MIL-PRF-19978.

TABLE I. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
Characteristic K	
	At +25°C
0 to 0.6 microfarad	25,000 megohms
Greater than 0.6 microfarad	15,000 megohm-microfarads 1/
	At +125°C
0 to 0.08 microfarad	250 megohms
Greater than 0.08 microfarad	20 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

TABLE II. STYLE CQR13 capacitors.

Part or Identifying Number (PIN) 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate levels	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D + .015, - .005	L ± .031	D + .015, - .005
	Volts	µF			Inches	Inches	Inches	Inches
CQR13A-KC392-3-	200	.0039	G, J, K	M, P, R, S	.750	.400	.688	.400
CQR13A-KC472-3-	200	.0047	G, J, K	M, P, R, S	.750	.400	.688	.400
CQR13A-KC562-3-	200	.0056	G, J, K	M, P, R, S	.750	.400	.688	.400
CQR13A-KC682-3-	200	.0068	G, J, K	M, P, R, S	.750	.400	.688	.400
CQR13A-KC183-3-	200	.018	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KC223-3-	200	.022	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KC273-3-	200	.027	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KC333-3-	200	.033	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KC393-3-	200	.039	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KC473-3-	200	.047	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KC563-3-	200	.056	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KC683-3-	200	.068	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KC823-3-	200	.082	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR13A-KC104-3-	200	.10	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR13A-KC124-3-	200	.12	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR13A-KC154-3-	200	.15	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR13A-KC184-3-	200	.18	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR13A-KC224-3-	200	.22	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR13A-KC274-3-	200	.27	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR13A-KC334-3-	200	.33	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR13A-KC394-3-	200	.39	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR13A-KC474-3-	200	.47	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR13A-KC564-3-	200	.56	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR13A-KC684-3-	200	.68	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR13A-KC824-3-	200	.82	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR13A-KC105-3-	200	1.000	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR13A-KE272-3-	400	.0027	G, J, K	M, P, R, S	.750	.400	.688	.400
CQR13A-KE332-3-	400	.0033	G, J, K	M, P, R, S	.750	.400	.688	.400
CQR13A-KE123-3-	400	.012	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KE153-3-	400	.015	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KE273-3-	400	.027	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KE333-3-	400	.033	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KE393-3-	400	.039	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR13A-KE473-3-	400	.047	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR13A-KE563-3-	400	.056	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR13A-KE683-3-	400	.068	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR13A-KE823-3-	400	.082	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR13A-KE104-3-	400	.10	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR13A-KE124-3-	400	.12	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR13A-KE154-3-	400	.15	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR13A-KE184-3-	400	.18	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR13A-KE224-3-	400	.22	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR13A-KE274-3-	400	.27	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR13A-KE334-3-	400	.33	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR13A-KE394-3-	400	.39	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR13A-KE474-3-	400	.47	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR13A-KF102-3-	600	.0010	G, J, K	M, P, R, S	.750	.400	.688	.400
CQR13A-KF122-3-	600	.0012	G, J, K	M, P, R, S	.750	.400	.688	.400

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

TABLE II. STYLE CQR13 capacitors - Continued.

PIN 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate levels	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D + .015, - .005	L ± .031	D + .015, - .005
	Volts	µF			Inches	Inches	Inches	Inches
CQR13A-KF152-3-	600	.0015	G, J, K	M, P, R, S	.750	.400	.688	.400
CQR13A-KF182-3-	600	.0018	G, J, K	M, P, R, S	.750	.400	.688	.400
CQR13A-KF222-3-	600	.0022	G, J, K	M, P, R, S	.750	.400	.688	.400
CQR13A-KF272-3-	600	.0027	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF332-3-	600	.0033	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF392-3-	600	.0039	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF472-3-	600	.0047	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF562-3-	600	.0056	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF682-3-	600	.0068	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF822-3-	600	.0082	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF103-3-	600	.010	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF123-3-	600	.012	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF153-3-	600	.015	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF183-3-	600	.018	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF223-3-	600	.022	G, J, K	M, P, R, S	.875	.400	.812	.400
CQR13A-KF273-3-	600	.027	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR13A-KF333-3-	600	.033	G, J, K	M, P, R, S	1.125	.400	1.062	.400
CQR13A-KF393-3-	600	.039	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR13A-KF473-3-	600	.047	G, J, K	M, P, R, S	1.375	.400	1.312	.400
CQR13A-KF563-3-	600	.056	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR13A-KF683-3-	600	.068	G, J, K	M, P, R, S	1.125	.562	1.062	.562
CQR13A-KF823-3-	600	.082	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR13A-KF104-3-	600	.10	G, J, K	M, P, R, S	1.375	.562	1.312	.562
CQR13A-KF124-3-	600	.12	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR13A-KF154-3-	600	.15	G, J, K	M, P, R, S	1.625	.562	1.562	.562
CQR13A-KF184-3-	600	.18	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR13A-KF224-3-	600	.22	G, J, K	M, P, R, S	1.625	.670	1.562	.670
CQR13A-KF274-3-	600	.27	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR13A-KF334-3-	600	.33	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR13A-KF394-3-	600	.39	G, J, K	M, P, R, S	2.375	.750	2.312	.750
CQR13A-KF474-3-	600	.47	G, J, K	M, P, R, S	2.375	.750	2.312	.750
CQR13A-KG184-3-	1,000	.18	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR13A-KG224-3-	1,000	.22	G, J, K	M, P, R, S	2.125	.750	2.062	.750
CQR13A-KG274-3-	1,000	.27	G, J, K	M, P, R, S	2.125	1.0	2.062	1.000
CQR13A-KG334-3-	1,000	.33	G, J, K	M, P, R, S	2.125	1.0	2.062	1.000
CQR13A-KG394-3-	1,000	.39	G, J, K	M, P, R, S	2.375	1.0	2.312	1.000
CQR13A-KG474-3-	1,000	.47	G, J, K	M, P, R, S	2.375	1.0	2.312	1.000

1/ Complete PIN shall include additional symbols to indicate circuit, capacitance tolerance, and failure rate level, as applicable.
2/ See table III for metric equivalents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

TABLE III. Millimeter equivalents of inches.

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.688	17.48	1.312	33.32
.015	0.38	.750	19.05	1.375	34.93
.031	0.79	.812	20.62	1.562	39.67
.235	5.97	.833	21.16	1.625	41.28
.312	7.92	.875	22.23	2.062	52.37
.400	10.16	1.000	25.40	2.125	53.98
.562	14.27	1.062	26.97	2.312	58.72
.670	17.02	1.125	28.58	2.375	60.33

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents: In addition to MIL-PRF-19978, this document also references the following:

MIL-STD-202-112
MIL-STD-202-204
MIL-STD-202-211

Custodians:
Army - CR
Navy - EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2026-029)

Review activities:
Navy - MC
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.