INCH-POUND
MIL-PRF-19978/12C
9 December 2021
SUPERSEDING
MIL-C-19978/12B
18 June 2001


PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, PLASTIC (OR PAPER-PLASTIC) DIELECTRIC, AXIAL-WIRE TERMINAL, TUBULAR (UNINSULATED) (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CQR19

INACTIVE FOR NEW DESIGN
AFTER 20 OCTOBER 1972

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19978.

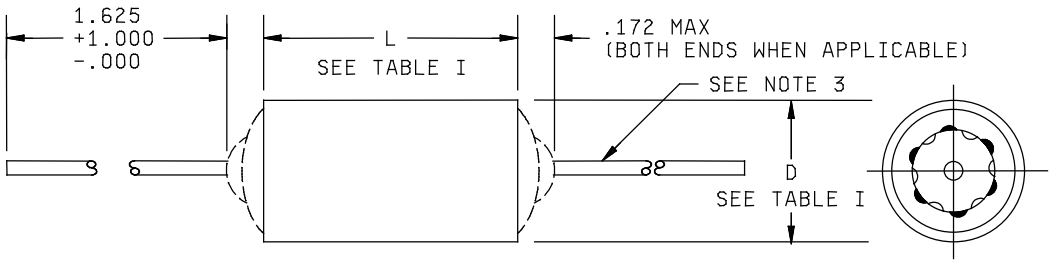

Inches	mm	Inches	mm
.001	0.03	.195	4.95
.004	0.10	.235	5.97
.020	0.51	.312	7.92
.025	0.64	.400	10.16
.032	0.81	1.000	25.40
.562	14.27	1.562	39.67
.172	4.37	1.625	41.38
.175	4.45		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.
3. Leads shall be of tinned solid wire, .020 inch (No. 24AWG) for cases .175 inch and .195 inch in diameter; .025 inch (No. 22 AWG) for cases .235 inch through .312 inch diameter; and .032 inch (No. 20 AWG) for cases .400 inch diameter and above. Tolerance on all lead wire diameters shall be -.004 inch, -.001 inch.
4. Capacitors with dimension L of 1.562 inches or D of .562 inch and larger, are not intended to be supported by their leads. These capacitors shall be provided with a supplementary means of mounting, such as a wrap-around band.
5. Lead length may be a minimum of 1.00 inch long for use in tape and reel packaging when specified in the ordering data.

FIGURE 1. Style CQR19 capacitors.

AMSC N/A
FSC 5910
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figure 1 and table I.

Case material: Nonmagnetic (end seal may be of magnetic material).

Dielectric material: Paper and polyethelene terephthalate (K).

Terminals: Axial-wire lead (see figure 1).

Circuit diagram:



Rated voltage: See table I.

Rated temperature: -65° to +125°C.

Capacitance (nominal): See table I.

Capacitance tolerance: See table I.

Dissipation factor (DF) (max): 1.0 percent.

Failure rate level: M, P, R or S in accordance with MIL-PRF-19978.

Burn-in: In accordance with MIL-PRF-19978.

Radiographic inspection: In accordance with MIL-PRF-19978.

Seal: MIL-STD-202-112, test condition letter A.

Dielectric withstanding voltage (DWV):

Sleeving: In accordance with MIL-PRF-19978.

Barometric pressure, qualification only: In accordance with MIL-PRF-19978.

Test points:

Circuit diagram 1: Between terminals and case.

Circuit diagram 3: Between ungrounded terminal and case.

Vibration, high frequency: MIL-STD-202-204, test condition B, with the following exception:

Direction and duration of motion: 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Salt atmosphere: In accordance with MIL-PRF-19978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CQR19 capacitors.

Part or identifying number (PIN) /1	DC voltage rating (volts)	Capacitance rating (µF)	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D+.015 -.005	L ± .031	D+.015 -.005
CQR19A-KC124-3-	200	.12	J, K	M, P, R, S	1.125	.562	1.063	.562
CQR19A-KC154-3-	200	.15	J, K	M, P, R, S	1.125	.562	1.063	.562
CQR19A-KD392-3-	300	.0039	J, K	M, P, R, S	.813	.235	.719	.235
CQR19A-KD472-3-	300	.0047	J, K	M, P, R, S	.813	.235	.719	.235
CQR19A-KD183-3-	300	.018	J, K	M, P, R, S	1.062	.312	.969	.312
CQR19A-KD223-3-	300	.022	J, K	M, P, R, S	1.062	.312	.969	.312
CQR19A-KD563-3-	300	.056	J, K	M, P, R, S	1.312	.400	1.219	.400
CQR19A-KD683-3-	300	.068	J, K	M, P, R, S	1.312	.400	1.219	.400
CQR19A-KD394-3-	300	.39	J, K	M, P, R, S	1.875	.750	1.812	.750
CQR19A-KD474-3-	300	.47	J, K	M, P, R, S	1.875	.750	1.812	.750
CQR19A-KD564-3-	300	.56	J, K	M, P, R, S	2.375	.750	2.312	.750
CQR19A-KD684-3-	300	.68	J, K	M, P, R, S	2.375	.750	2.312	.750
CQR19A-KD824-3-	300	.82	J, K	M, P, R, S	2.125	1.000	2.062	1.000
CQR19A-KD105-3-	300	1.0	J, K	M, P, R, S	2.125	1.000	2.062	1.000
CQR19A-KE184-3-	400	.18	J, K	M, P, R, S	1.500	.670	1.438	.670
CQR19A-KE224-3-	400	.22	J, K	M, P, R, S	1.500	.670	1.438	.670
CQR19A-KE564-3-	400	.56	J, K	M, P, R, S	2.625	.750	2.562	.750
CQR19A-KE684-3-	400	.68	J, K	M, P, R, S	2.625	.750	2.562	.750
CQR19A-KE824-3-	400	.82	J, K	M, P, R, S	2.250	1.000	2.188	1.000
CQR19A-KE105-3-	400	1.0	J, K	M, P, R, S	2.250	1.000	2.188	1.000
CQR19A-KF273-3-	600	.027	J, K	M, P, R, S	1.562	.400	1.469	.400
CQR19A-KF333-3-	600	.033	J, K	M, P, R, S	1.562	.400	1.469	.400
CQR19A-KF393-3-	600	.039	J, K	M, P, R, S	1.125	.562	1.062	.562
CQR19A-KF473-3-	600	.047	J, K	M, P, R, S	1.125	.562	1.062	.562
CQR19A-KF394-3-	600	.39	J, K	M, P, R, S	2.125	1.000	2.062	1.000
CQR19A-KF474-3-	600	.47	J, K	M, P, R, S	2.125	1.000	2.062	1.000

1/ Complete PIN shall include additional symbols to indicate circuit, capacitance tolerance, and failure rate level, as applicable.

2/ Dimensions are in inches. See table II for metric equivalents.

TABLE II. Millimeter equivalents of decimal inches.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.719	18.26	1.219	30.96	2.062	52.37
.015	0.38	.750	19.05	1.312	33.32	2.125	53.98
.031	0.79	.813	20.65	1.438	36.53	2.188	55.58
.235	5.97	.969	24.61	1.469	37.31	2.250	57.15
.312	7.92	1.000	25.4	1.500	38.10	2.312	58.72
.400	10.16	1.062	26.97	1.562	39.67	2.375	60.33
.562	14.27	1.063	27.00	1.812	46.02	2.562	65.07
.670	17.02	1.125	28.58	1.875	47.63	2.625	66.67

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

Immersion:

DWV:

Sleeving: In accordance with MIL-PRF-19978.

IR:

Sleeving: In accordance with MIL-PRF-19978.

Solderability: In accordance with MIL-PRF-19978.

Terminal strength: MIL-STD-202-211, test condition letter D.

Moisture resistance:

DWV:

Sleeving: In accordance with MIL-PRF-19978.

IR:

Sleeving: In accordance with MIL-PRF-19978.

Stability at low and high temperatures:

Low temperature:

Test temperature: -65°C +0°C, -5°C.

Capacitance change (maximum): -10 percent.

High temperature:

Test temperature: +125°C +5°C, -0°C.

Capacitance change (maximum): +10 percent.

Life:

Capacitance change (maximum): ± 5 percent of initial measured value.

Resistance to soldering heat: In accordance with MIL-PRF-19978.

Insulation resistance (IR):

Sleeving: In accordance with MIL-PRF-19978.

Terminal to terminal: See table III.

Terminal to case: Greater than 10,000 megohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.

TABLE III. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
	At +25°C
0 to 0.6 microfarad	25,000 megohms
Greater than 0.6 microfarad	15,000 megohm-microfarads 1/
	At +125°C
0 to 0.08 microfarad	250 megohms
Greater than 0.08 microfarad	20 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

Referenced documents: In addition to MIL-PRF-19978, this document references the following:

MIL-STD-202-112
MIL-STD-202-204
MIL-STD-202-211

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2022-001)

Review activities:
Army - AR, AT, AV, MI
Navy - AS, MC, OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:04Z
Check the source to verify that this is the current version before use.