
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, PLASTIC DIELECTRIC, AXIAL-WIRE TERMINAL, TUBULAR (INSULATED) (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CQR29

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-19978.

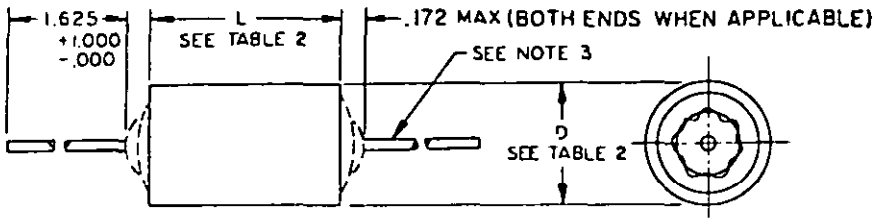

INCHES	MM	INCHES	MM
.001	.03	.235	5.97
.004	.10	.312	7.92
.020	.51	.400	10.16
.025	.64	.562	14.27
.032	.81	1.000	25.40
.172	4.37	1.562	39.67
.175	4.45	1.625	41.28
.195	4.95		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Leads shall be of tinned solid wire, .020(No. 24 AWG) for cases .175 and .195 in diameter; .025(No. 22 AWG) for cases .235 thru .312 diameter; and .032(No. 20 AWG) for cases .400 diameter and above. Tolerance on all lead wire diameters shall be +.004, -.001.
4. Capacitors with dimension L of 1.562 or D of .562 and larger, are not intended to be supported by their leads. These capacitors shall be provided with a supplementary means of mounting, such as a wrap-around band.

FIGURE 1. Style CQR29 capacitors.


FSC 5910

Source: https://assist.dla.mil -- Downloaded: 202640-19T07:06Z
Check the source to verify that this is the currentversion before use.


REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure 1 and table II.
Case material - Nonmagnetic (end seal may be of magnetic material).
Dielectric material - Polyethelene terephthalate (M).
Terminals - Axial-wire lead (see figure 1).

Circuit diagram - 1



3



Rated voltage - See table II.
Rated temperature - -65° to +85° C.
Capacitance (Cap.) (nom) - See table II.
Capacitance tolerance - See table II.
Dissipation factor (DF) (max) - 0.6 percent.
Failure rate level - In accordance with MIL-C-19978.
Reliability - In accordance with MIL-C-19978.

Burn-in - In accordance with MIL-C-19978.

Radiographic inspection: In accordance with MIL-C-19978.

Seal: Method 112 of MIL-STD-202, test condition letter - A.

Dielectric withstanding voltage (DWV):
Sleeving - In accordance with MIL-C-19978.

Barometric pressure: In accordance with MIL-C-19978.
Test points:
Circuit diagram 1 - Between terminals and case.
Circuit diagram 3 - Between ungrounded terminal and case.

Insulation resistance (IR):
Sleeving - In accordance with MIL-C-19978.
Terminal to terminal - See table I.

TABLE I. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
Characteristic M	
	At 25° C
0 to 0.68 microfarad	100,000 megohms
Greater than 0.68 microfarad	68,000 megohm-microfarads 1/
	At 85° C
0 to 0.2 microfarad	25,000 megohms
Greater than 0.2 microfarad	5,000 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

Source: https://assist.dla.mil -- Downloaded: 202640-19T07:06Z
Check the source to verify that this is the current version before use.

Vibration, high frequency: Method 204, test condition B, with the following exception:
Direction and duration of motion - 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Salt spray: In accordance with MIL-C-19978.

Immersion:
DWV:
Sleeving - In accordance with MIL-C-19978.
IR:
Sleeving - In accordance with MIL-C-19978.

Solderability: In accordance with MIL-C-19978.

Terminal strength: Method 211 of MIL-STD-202, test condition letter - D.

Moisture resistance:
DWV:
Sleeving - In accordance with MIL-C-19978.
IR:
Sleeving - In accordance with MIL-C-19978.

Dielectric absorption (not applicable to values of 0.01 μF or less): 0.60 percent, maximum.

Stability at low and high temperature:
Low temperature:
Test temperature - $-65^{\circ}\ ^{+0^{\circ}}_{-5^{\circ}}$ C.
Capacitance change (max) - -7 percent.
High temperature:
Test temperature - $+85^{\circ}\ ^{+5^{\circ}}_{-0^{\circ}}$ C.
Capacitance change (max) - +5 percent.

Life:
Capacitance change (max) - ±5 percent of initial measured value.

Resistance to soldering heat: In accordance with MIL-C-19978.

Source: https://assist.dla.mil -- Downloaded: 202640-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. *Style CQR29 capacitors.*

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D +.015 -.005	L ± .031	D +.015 -.005
	Volts	μF			Inches	Inches	Inches	Inches
CQR29A-MZ155-3-	30	1.5	G, J, K	L, M, P, R, S	1.625	.562	1.531	.562
CQR29A-MZ225-3-	30	2.2	G, J, K		1.875	.670	1.781	.670
CQR29A-MZ335-3-	30	3.3	G, J, K		1.875	.750	1.781	.750
CQR29A-MZ475-3-	30	4.7	G, J, K		2.625	.750	2.531	.750
CQR29A-MZ685-3-	30	6.8	G, J, K		2.125	1.000	2.031	1.000
CQR29A-MZ106-3-	30	10.0	G, J, K		2.375	1.000	2.281	1.000
CQR29A-MA102-3-	50	.0010	G, J, K		.500	.175	.406	.175
CQR29A-MA122-3-	50	.0012	G, J, K		.500	.175	.406	.175
CQR29A-MA152-3-	50	.0015	G, J, K		.500	.175	.406	.175
CQR29A-MA182-3-	50	.0018	G, J, K		.500	.175	.406	.175
CQR29A-MA222-3-	50	.0022	G, J, K		.500	.175	.406	.175
CQR29A-MA272-3-	50	.0027	G, J, K		.500	.175	.406	.175
CQR29A-MA332-3-	50	.0033	G, J, K		.500	.175	.406	.175
CQR29A-MA392-3-	50	.0039	G, J, K		.500	.175	.406	.175
CQR29A-MA472-3-	50	.0047	G, J, K		.500	.175	.406	.175
CQR29A-MA562-3-	50	.0056	G, J, K		.500	.175	.406	.175
CQR29A-MA682-3-	50	.0068	G, J, K		.500	.175	.406	.175
CQR29A-MA822-3-	50	.0082	G, J, K		.500	.175	.406	.175
CQR29A-MA103-3-	50	.010	G, J, K		.500	.175	.406	.175
CQR29A-MA123-3-	50	.012	G, J, K		.500	.235	.406	.235
CQR29A-MA153-3-	50	.015	G, J, K		.500	.235	.406	.235
CQR29A-MA183-3-	50	.018	G, J, K		.500	.235	.406	.235
CQR29A-MA223-3-	50	.022	G, J, K		.500	.235	.406	.235
CQR29A-MA273-3-	50	.027	G, J, K		.500	.312	.406	.312
CQR29A-MA333-3-	50	.033	G, J, K		.500	.312	.406	.312
CQR29A-MA393-3-	50	.039	G, J, K		.500	.312	.406	.312
CQR29A-MA473-3-	50	.047	G, J, K		.500	.312	.406	.312
CQR29A-MA563-3-	50	.056	G, J, K		.562	.312	.468	.312
CQR29A-MA683-3-	50	.068	G, J, K		.562	.312	.468	.312
CQR29A-MA124-3-	50	.12	G, J, K		.875	.312	.781	.312
CQR29A-MA154-3-	50	.15	G, J, K		.875	.312	.781	.312
CQR29A-MA184-3-	50	.18	G, J, K		.875	.400	.781	.400
CQR29A-MA224-3-	50	.22	G, J, K		.875	.400	.781	.400
CQR29A-MA274-3-	50	.27	G, J, K		.875	.400	.781	.400
CQR29A-MA334-3-	50	.33	G, J, K		1.000	.400	.906	.400
CQR29A-MA394-3-	50	.39	G, J, K		1.125	.400	1.031	.400
CQR29A-MA474-3-	50	.47	G, J, K		1.125	.400	1.031	.400
CQR29A-MA564-3-	50	.56	G, J, K		1.375	.400	1.281	.400
CQR29A-MA684-3-	50	.68	G, J, K		1.375	.400	1.281	.400
CQR29A-MA824-3-	50	.82	G, J, K		1.125	.562	1.031	.562
CQR29A-MA105-3-	50	1.0	G, J, K		1.125	.562	1.031	.562
CQR29A-MA125-3-	50	1.2	G, J, K		1.375	.562	1.281	.562
CQR29A-MB125-3-	100	1.2	G, J, K		1.625	.670	1.531	.670
CQR29A-MB155-3-	100	1.5	G, J, K		1.625	.670	1.531	.670
CQR29A-MB185-3-	100	1.8	G, J, K	L, M, P, R, S	1.625	.670	1.531	.670

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR29 capacitors. -Continued

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D +.015 -.005	L ± .031	D +.015 -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR29A-MB225-3-	100	2.2	G, J, K	L, M, P, R, S	1.875	.750	1.781	.750
CQR29A-MB275-3-	100	2.7	G, J, K		2.125	.750	2.031	.750
CQR29A-MB335-3-	100	3.3	G, J, K		2.375	.750	2.281	.750
CQR29A-MB395-3-	100	3.9	G, J, K		1.875	1.000	1.781	1.000
CQR29A-MB475-3-	100	4.7	G, J, K		2.125	1.000	2.031	1.000
CQR29A-MB565-3-	100	5.6	G, J, K		2.375	1.000	2.281	1.000
CQR29A-MB685-3-	100	6.8	G, J, K		2.625	1.000	2.531	1.000
CQR29A-MC102-3-	200	.0010	G, J, K		.750	.175	.656	.175
CQR29A-MC122-3-	200	.0012	G, J, K		.750	.175	.656	.175
CQR29A-MC152-3-	200	.0015	G, J, K		.750	.175	.656	.175
CQR29A-MC182-3-	200	.0018	G, J, K		.750	.175	.656	.175
CQR29A-MC222-3-	200	.0022	G, J, K		.750	.175	.656	.175
CQR29A-MC272-3-	200	.0027	G, J, K		.750	.175	.656	.175
CQR29A-MC332-3-	200	.0033	G, J, K		.750	.175	.656	.175
CQR29A-MC392-3-	200	.0039	G, J, K		.750	.175	.656	.175
CQR29A-MC472-3-	200	.0047	G, J, K		.750	.175	.656	.175
CQR29A-MC562-3-	200	.0056	G, J, K		.750	.175	.656	.175
CQR29A-MC682-3-	200	.0068	G, J, K		.750	.175	.656	.175
CQR29A-MC822-3-	200	.0082	G, J, K		.750	.175	.656	.175
CQR29A-MC103-3-	200	.010	G, J, K		.750	.175	.656	.175
CQR29A-MC123-3-	200	.012	G, J, K		.719	.195	.625	.195
CQR29A-MC153-3-	200	.015	G, J, K		.719	.195	.625	.195
CQR29A-MC183-3-	200	.018	G, J, K		.719	.235	.625	.235
CQR29A-MC223-3-	200	.022	G, J, K		.719	.235	.625	.235
CQR29A-MC273-3-	200	.027	G, J, K		.719	.235	.625	.235
CQR29A-MC333-3-	200	.033	G, J, K		.719	.235	.625	.235
CQR29A-MC393-3-	200	.039	G, J, K		.719	.312	.625	.312
CQR29A-MC473-3-	200	.047	G, J, K		.719	.312	.625	.312
CQR29A-MC563-3-	200	.056	G, J, K		.844	.312	.750	.312
CQR29A-MC683-3-	200	.068	G, J, K		.844	.312	.750	.312
CQR29A-MC823-3-	200	.082	G, J, K		.844	.312	.750	.312
CQR29A-MC104-3-	200	.10	G, J, K		.812	.400	.718	.400
CQR29A-MC124-3-	200	.12	G, J, K		.812	.400	.718	.400
CQR29A-MC154-3-	200	.15	G, J, K		1.062	.400	.969	.400
CQR29A-MC184-3-	200	.18	G, J, K		1.062	.400	.969	.400
CQR29A-MC224-3-	200	.22	G, J, K		1.250	.400	1.156	.400
CQR29A-MC274-3-	200	.27	G, J, K		1.250	.400	1.156	.400
CQR29A-MC334-3-	200	.33	G, J, K		1.188	.500	1.094	.500
CQR29A-MC394-3-	200	.39	G, J, K		1.188	.500	1.094	.500
CQR29A-MC474-3-	200	.47	G, J, K		1.375	.562	1.281	.562
CQR29A-MC564-3-	200	.56	G, J, K		1.375	.562	1.281	.562
CQR29A-MC684-3-	200	.68	G, J, K		1.875	.562	1.781	.562
CQR29A-MC824-3-	200	.82	G, J, K		1.875	.562	1.781	.562
CQR29A-MC105-3-	200	1.0	G, J, K	L, M, P, R, S	1.875	.562	1.781	.562

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:06Z
Check the source to verify that this is the currentversion before use.

TABLE II. Style CQR29 capacitors. -Continued

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D +.015 -.005	L ± .031	D +.015 -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR29A-ME102-3-	400	.0010	G, J, K	L, M, P, R, S	.812	.235	.718	.235
CQR29A-ME122-3-	400	.0012	G, J, K		.812	.235	.718	.235
CQR29A-ME152-3-	400	.0015	G, J, K		.812	.235	.718	.235
CQR29A-ME182-3-	400	.0018	G, J, K		.812	.235	.718	.235
CQR29A-ME222-3-	400	.0022	G, J, K		.812	.235	.718	.235
CQR29A-ME272-3-	400	.0027	G, J, K		.812	.235	.718	.235
CQR29A-ME332-3-	400	.0033	G, J, K		.812	.235	.718	.235
CQR29A-ME392-3-	400	.0039	G, J, K		.812	.235	.718	.235
CQR29A-ME472-3-	400	.0047	G, J, K		.812	.235	.718	.235
CQR29A-ME562-3-	400	.0056	G, J, K		.938	.312	.844	.312
CQR29A-ME682-3-	400	.0068	G, J, K		.938	.312	.844	.312
CQR29A-ME822-3-	400	.0082	G, J, K		.938	.312	.844	.312
CQR29A-ME103-3-	400	.010	G, J, K		.938	.312	.844	.312
CQR29A-ME123-3-	400	.012	G, J, K		.938	.312	.844	.312
CQR29A-ME153-3-	400	.015	G, J, K		.938	.312	.844	.312
CQR29A-ME183-3-	400	.018	G, J, K		1.062	.312	.969	.312
CQR29A-ME223-3-	400	.022	G, J, K		1.062	.312	.969	.312
CQR29A-ME273-3-	400	.027	G, J, K		.938	.400	.844	.400
CQR29A-ME333-3-	400	.033	G, J, K		.938	.400	.844	.400
CQR29A-ME393-3-	400	.039	G, J, K		1.062	.400	.969	.400
CQR29A-ME473-3-	400	.047	G, J, K		1.062	.400	.969	.400
CQR29A-ME563-3-	400	.056	G, J, K		1.250	.400	1.156	.400
CQR29A-ME683-3-	400	.068	G, J, K		1.250	.400	1.156	.400
CQR29A-ME823-3-	400	.082	G, J, K		1.562	.400	1.469	.400
CQR29A-ME104-3-	400	.10	G, J, K		1.562	.400	1.469	.400
CQR29A-ME124-3-	400	.12	G, J, K		1.281	.562	1.188	.562
CQR29A-ME154-3-	400	.15	G, J, K		1.281	.562	1.188	.562
CQR29A-ME184-3-	400	.18	G, J, K		1.531	.562	1.438	.562
CQR29A-ME224-3-	400	.22	G, J, K		1.531	.562	1.438	.562
CQR29A-ME274-3-	400	.27	G, J, K		1.906	.562	1.812	.562
CQR29A-ME334-3-	400	.33	G, J, K		1.906	.562	1.812	.562
CQR29A-ME394-3-	400	.39	G, J, K		1.906	.670	1.812	.670
CQR29A-ME474-3-	400	.47	G, J, K		1.906	.670	1.812	.670
CQR29A-ME564-3-	400	.56	G, J, K		2.156	.750	2.062	.750
CQR29A-ME684-3-	400	.68	G, J, K		2.156	.750	2.062	.750
CQR29A-ME824-3-	400	.82	G, J, K		2.656	.750	2.562	.750
CQR29A-ME105-3-	400	1.0	G, J, K		2.656	.750	2.562	.750
CQR29A-MF102-3-	600	.0010	G, J, K		.812	.235	.718	.235
CQR29A-MF122-3-	600	.0012	G, J, K		.812	.235	.718	.235
CQR29A-MF152-3-	600	.0015	G, J, K		.812	.235	.718	.235
CQR29A-MF182-3-	600	.0018	G, J, K		.812	.235	.718	.235
CQR29A-MF222-3-	600	.0022	G, J, K		.812	.235	.718	.235
CQR29A-MF272-3-	600	.0027	G, J, K		.812	.235	.718	.235
CQR29A-MF332-3-	600	.0033	G, J, K		.938	.312	.844	.312
CQR29A-MF392-3-	600	.0039	G, J, K		.938	.312	.844	.312
CQR29A-MF472-3-	600	.0047	G, J, K		.938	.312	.844	.312
CQR29A-MF562-3-	600	.0056	G, J, K		.938	.312	.844	.312
CQR29A-MF682-3-	600	.0068	G, J, K	L, M, P, R, S	.938	.312	.844	.312

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR29 capacitors. -Continued

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D +.015 -.005	L ± .031	D +.015 -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR29A-MF822-3-	600	.0082	G, J, K	L, M, P, R, S	1.062	.312	.969	.312
CQR29A-MF103-3-	600	.010	G, J, K		1.062	.312	.969	.312
CQR29A-MF123-3-	600	.012	G, J, K		.938	.400	.844	.400
CQR29A-MF153-3-	600	.015	G, J, K		.938	.400	.844	.400
CQR29A-MF183-3-	600	.018	G, J, K		1.062	.400	.969	.400
CQR29A-MF223-3-	600	.022	G, J, K		1.062	.400	.969	.400
CQR29A-MF273-3-	600	.027	G, J, K		1.312	.400	1.219	.400
CQR29A-MF333-3-	600	.033	G, J, K		1.312	.400	1.219	.400
CQR29A-MF393-3-	600	.039	G, J, K		1.562	.400	1.469	.400
CQR29A-MF473-3-	600	.047	G, J, K		1.562	.400	1.469	.400
CQR29A-MF563-3-	600	.056	G, J, K		1.250	.562	1.156	.562
CQR29A-MF683-3-	600	.068	G, J, K		1.250	.562	1.156	.562
CQR29A-MF823-3-	600	.082	G, J, K		1.500	.562	1.406	.562
CQR29A-MF104-3-	600	.10	G, J, K		1.500	.562	1.406	.562
CQR29A-MF124-3-	600	.12	G, J, K		1.875	.562	1.781	.562
CQR29A-MF154-3-	600	.15	G, J, K		1.875	.562	1.781	.562
CQR29A-MF184-3-	600	.18	G, J, K		1.875	.670	1.781	.670
CQR29A-MF224-3-	600	.22	G, J, K		1.875	.670	1.781	.670
CQR29A-MF274-3-	600	.27	G, J, K		2.125	.750	2.031	.750
CQR29A-MF334-3-	600	.33	G, J, K		2.125	.750	2.031	.750
CQR29A-MF394-3-	600	.39	G, J, K		2.265	.750	2.531	.750
CQR29A-MF474-3-	600	.47	G, J, K		2.265	.750	2.531	.750
CQR29A-MF564-3-	600	.56	G, J, K		2.125	1.000	2.031	1.000
CQR29A-MF684-3-	600	.68	G, J, K		2.125	1.000	2.031	1.000
CQR29A-MG102-3-	1000	.0010	G, J, K		.938	.312	.844	.312
CQR29A-MG122-3-	1000	.0012	G, J, K		.938	.312	.844	.312
CQR29A-MG152-3-	1000	.0015	G, J, K		.938	.312	.844	.312
CQR29A-MG182-3-	1000	.0018	G, J, K		.938	.312	.844	.312
CQR29A-MG222-3-	1000	.0022	G, J, K		.938	.312	.844	.312
CQR29A-MG272-3-	1000	.0027	G, J, K		.938	.312	.844	.312
CQR29A-MG332-3-	1000	.0033	G, J, K		.938	.312	.844	.312
CQR29A-MG392-3-	1000	.0039	G, J, K		.938	.400	.844	.400
CQR29A-MG472-3-	1000	.0047	G, J, K		.938	.400	.844	.400
CQR29A-MG562-3-	1000	.0056	G, J, K		1.062	.400	.969	.400
CQR29A-MG682-3-	1000	.0068	G, J, K		1.062	.400	.969	.400
CQR29A-MG822-3-	1000	.0082	G, J, K		1.312	.400	1.219	.400
CQR29A-MG103-3-	1000	.010	G, J, K		1.312	.400	1.219	.400
CQR29A-MG123-3-	1000	.012	G, J, K		1.562	.400	1.469	.400
CQR29A-MG183-3-	1000	.018	G, J, K		1.250	.562	1.156	.562
CQR29A-MG223-3-	1000	.022	G, J, K		1.250	.562	1.156	.562
CQR29A-MG273-3-	1000	.027	G, J, K		1.250	.562	1.156	.562
CQR29A-MG333-3-	1000	.033	G, J, K		1.500	.562	1.406	.562
CQR29A-MG393-3-	1000	.039	G, J, K		1.875	.562	1.781	.562
CQR29A-MG473-3-	1000	.047	G, J, K	L, M, P, R, S	1.875	.562	1.781	.562

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR29 capacitors. -Continued

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ± .031	D +.015 -.005	L ± .031	D +.015 -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR29A-MG563-3-	1000	.056	G, J, K	L, M, P, R, S	1.875	.670	1.781	.670
CQR29A-MG683-3-	1000	.068	G, J, K		1.875	.670	1.781	.670
CQR29A-MG823-3-	1000	.082	G, J, K		2.125	.750	2.031	.750
CQR29A-MG104-3-	1000	.10	G, J, K		2.125	.750	2.031	.750
CQR29A-MG124-3-	1000	.12	G, J, K		1.875	1.000	1.781	1.000
CQR29A-MG154-3-	1000	.15	G, J, K		1.875	1.000	1.781	1.000
CQR29A-MG184-3-	1000	.18	G, J, K		2.375	1.000	2.281	1.000
CQR29A-MG224-3-	1000	.22	G, J, K	L, M, P, R, S	2.375	1.000	2.281	1.000

1/ Complete part number shall include additional symbols to indicate circuit, capacitance tolerance, and failure rate level, as applicable.

2/ Dimensions are for basic case; sleeving shall extend 0.016 inch minimum and 0.062 inch maximum, beyond each end of the capacitor body; however, if a shrink-fitted insulation is used for the sleeving, it shall lap over the ends of the capacitor body. Add 0.047 inch maximum to the nominal for capacitor diameter.

TABLE III. Millimeter equivalents of decimal inches.

INCHES	MM	INCHES	MM
0.005	0.13	1.094	27.79
0.015	0.38	1.125	28.57
0.016	0.41	1.156	29.36
0.031	0.79	1.188	30.17
0.047	1.19	1.219	30.96
0.062	1.57	1.250	31.75
0.175	4.45	1.281	32.54
0.195	4.95	1.312	33.32
0.235	5.97	1.375	34.93
0.312	7.92	1.406	35.71
0.400	10.16	1.438	36.53
0.406	10.31	1.469	37.31
0.468	11.89	1.500	38.10
0.500	12.70	1.531	38.89
0.562	14.27	1.562	39.67
0.625	15.88	1.625	41.27
0.656	16.66	1.781	45.24
0.670	17.02	1.812	46.02
0.719	18.26	1.875	47.63
0.750	19.05	1.906	48.41
0.781	19.84	2.031	51.59
0.812	20.62	2.062	52.37
0.844	21.44	2.125	53.97
0.875	22.23	2.156	54.76
0.906	23.01	2.265	57.53
0.938	23.72	2.281	57.94
0.969	24.61	2.375	60.33
1.000	25.40	2.531	64.29
1.031	26.19	2.562	65.07
1.062	26.97	2.625	66.67
		2.656	67.46

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - MI, MU
Navy - AS
Air Force - 11, 17
DSA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS, OS, SH
Air Force -

Preparing activity:
Air Force - 80

Agent:
DSA - ES

(Project 5910-1072-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.