
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, PLASTIC DIELECTRIC, AXIAL-WIRE TERMINAL, TANGENTIAL RETAINER, TUBULAR (UNINSULATED) (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CQR32

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-19978.

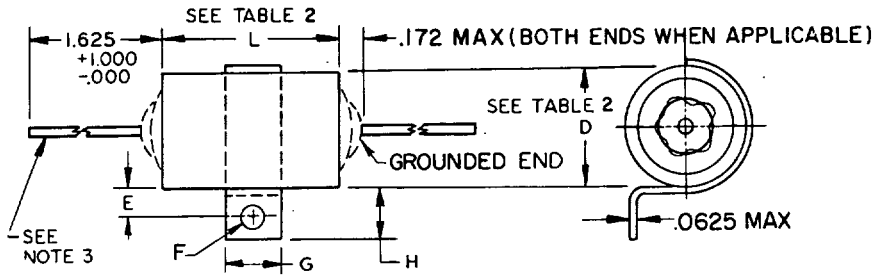

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.0625	1.59	.250	6.35
.004	.10	.144	3.66	.312	7.92
.005	.13	.156	3.96	.400	10.16
.020	.51	.172	4.37	.438	11.13
.025	.64	.175	4.45	.500	12.70
.031	.79	.188	4.78	.562	14.27
.032	.81	.195	4.95	1.000	25.40
.062	1.57	.235	5.97	1.625	41.28

Case dimension D	H±.062	G±.062	E±.031	F±.005
Less than .562	.312	.250	.188	.144
.562 and up	.438	.500	.250	.156

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Leads shall be of tinned solid wire, .020(No. 24 AWG) for cases .175 and .195 in diameter; .025(No. 22 AWG) for cases .235 thru .312 diameter; and .032(No. 20 AWG) for cases .400 diameter and above. Tolerance on all lead wire diameters shall be +.004, -.001.


FIGURE 1. Style CQR32 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure 1 and table II.
Case material - Nonmagnetic (end seal may be of magnetic material).
Dielectric material - Polyethelene terephthalate (M).
Terminals - Axial-wire lead (see figure 1).

Circuit diagram - 1



3



Rated voltage - See table II.
Rated temperature - -65° to +85°C.
Capacitance (Cap.) (nom) - See table II.
Capacitance tolerance - See table II.
Dissipation factor (DF) (max) - 0.6 percent.
Failure rate level - In accordance with MIL-C-19978.
Reliability - In accordance with MIL-C-19978.

Burn-in: In accordance with MIL-C-19978.

Radiographic inspection: In accordance with MIL-C-19978.

Seal: Method 112 of MIL-STD-202, test condition letter - A.

Barometric pressure: In accordance with MIL-C-19978.
Test points:
Circuit diagram 1 - Between terminals and case.
Circuit diagram 3 - Between ungrounded terminal and case.

Insulation resistance (IR):
Terminal to terminal - See table I.

TABLE I. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
Characteristic M	
	At 25°C
0 to 0.68 microfarad - - - - - - - - - -	100,000 megohms
Greater than 0.68 microfarad - - - - -	68,000 megohm-microfarads 1/
	At 85°C
0 to 0.2 microfarad - - - - - - - - - -	25,000 megohms
Greater than 0.2 microfarad - - - - - -	5,000 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B, with the following exception:
Direction and duration of motion - 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Salt spray: In accordance with MIL-C-19978.

Solderability: In accordance with MIL-C-19978.

Terminal strength: Method 211 of MIL-STD-202, test condition letter - D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR32 capacitors.

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions			
					Circuit 1		Circuit 3	
					L±.031	D+.015 -.005	L±.031	D+.015 -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR32A-MZ155-3-	30	1.5	G, J, K	L,M,P,R,S	1.625	.562	1.531	.562
CQR32A-MZ225-3-	30	2.2	G, J, K		1.875	.670	1.781	.670
CQR32A-MZ335-3-	30	3.3	G, J, K		1.875	.750	1.781	.750
CQR32A-MZ475-3-	30	4.7	G, J, K		2.625	.750	2.531	.750
CQR32A-MZ685-3-	30	6.8	G, J, K		2.125	1.000	2.031	1.000
CQR32A-MZ106-3-	30	10.0	G, J, K		2.375	1.000	2.281	1.000
CQR32A-MA102-3-	50	.0010	G, J, K		.500	.175	.406	.175
CQR32A-MA122-3-	50	.0012	G, J, K		.500	.175	.406	.175
CQR32A-MA152-3-	50	.0015	G, J, K		.500	.175	.406	.175
CQR32A-MA182-3-	50	.0018	G, J, K		.500	.175	.406	.175
CQR32A-MA222-3-	50	.0022	G, J, K		.500	.175	.406	.175
CQR32A-MA272-3-	50	.0027	G, J, K		.500	.175	.406	.175
CQR32A-MA332-3-	50	.0033	G, J, K		.500	.175	.406	.175
CQR32A-MA392-3-	50	.0039	G, J, K		.500	.175	.406	.175
CQR32A-MA472-3-	50	.0047	G, J, K		.500	.175	.406	.175
CQR32A-MA562-3-	50	.0056	G, J, K		.500	.175	.406	.175
CQR32A-MA682-3-	50	.0068	G, J, K		.500	.175	.406	.175
CQR32A-MA822-3-	50	.0082	G, J, K		.500	.175	.406	.175
CQR32A-MA103-3-	50	.010	G, J, K		.500	.175	.406	.175
CQR32A-MA123-3-	50	.012	G, J, K		.500	.235	.406	.235
CQR32A-MA153-3-	50	.015	G, J, K		.500	.235	.406	.235
CQR32A-MA183-3-	50	.018	G, J, K		.500	.235	.406	.235
CQR32A-MA223-3-	50	.022	G, J, K		.500	.235	.406	.235
CQR32A-MA273-3-	50	.027	G, J, K		.500	.312	.406	.312
CQR32A-MA333-3-	50	.033	G, J, K		.500	.312	.406	.312
CQR32A-MA393-3-	50	.039	G, J, K		.500	.312	.406	.312
CQR32A-MA473-3-	50	.047	G, J, K		.500	.312	.406	.312
CQR32A-MA563-3-	50	.056	G, J, K		.562	.312	.468	.312
CQR32A-MA683-3-	50	.068	G, J, K		.562	.312	.468	.312
CQR32A-MA124-3-	50	.12	G, J, K		.875	.312	.781	.312
CQR32A-MA154-3-	50	.15	G, J, K		.875	.312	.781	.312
CQR32A-MA184-3-	50	.18	G, J, K		.875	.400	.781	.400
CQR32A-MA224-3-	50	.22	G, J, K		.875	.400	.781	.400
CQR32A-MA274-3-	50	.27	G, J, K		.875	.400	.781	.400
CQR32A-MA334-3-	50	.33	G, J, K		1.000	.400	.906	.400
CQR32A-MA394-3-	50	.39	G, J, K		1.125	.400	1.031	.400
CQR32A-MA474-3-	50	.47	G, J, K		1.125	.400	1.031	.400
CQR32A-MA564-3-	50	.56	G, J, K		1.375	.400	1.281	.400
CQR32A-MA684-3-	50	.68	G, J, K		1.375	.400	1.281	.400
CQR32A-MA824-3-	50	.82	G, J, K		1.125	.562	1.031	.562
CQR32A-MA105-3-	50	1.0	G, J, K		1.125	.562	1.031	.562
CQR32A-MA125-3-	50	1.2	G, J, K		1.375	.562	1.281	.562
CQR32A-MB125-3-	100	1.2	G, J, K		1.625	.670	1.531	.670
CQR32A-MB155-3-	100	1.5	G, J, K		1.625	.670	1.531	.670
CQR32A-MB185-3-	100	1.8	G, J, K	L,M,P,R,S	1.625	.670	1.531	.670

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR32 capacitors. Continued

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions			
					Circuit 1		Circuit 3	
					L±.031	D+.015 -.005	L±.031	D+.015 -.005
	Volts	μF			Inches	Inches	Inches	Inches
CQR32A-MB225-3-	100	2.2	G, J, K	L,M,P,R,S	1.875	.750	1.781	.750
CQR32A-MB275-3-	100	2.7	G, J, K		2.125	.750	2.031	.750
CQR32A-MB335-3-	100	3.3	G, J, K		2.375	.750	2.281	.750
CQR32A-MB395-3-	100	3.9	G, J, K		1.875	1.000	1.781	1.000
CQR32A-MB475-3-	100	4.7	G, J, K		2.125	1.000	2.031	1.000
CQR32A-MB565-3-	100	5.6	G, J, K		2.375	1.000	2.281	1.000
CQR32A-MB685-3-	100	6.8	G, J, K		2.625	1.000	2.531	1.000
CQR32A-MC102-3-	200	.0010	G, J, K		.750	.175	.656	.175
CQR32A-MC122-3-	200	.0012	G, J, K		.750	.175	.656	.175
CQR32A-MC152-3-	200	.0015	G, J, K		.750	.175	.656	.175
CQR32A-MC182-3-	200	.0018	G, J, K		.750	.175	.656	.175
CQR32A-MC222-3-	200	.0022	G, J, K		.750	.175	.656	.175
CQR32A-MC272-3-	200	.0027	G, J, K		.750	.175	.656	.175
CQR32A-MC332-3-	200	.0033	G, J, K		.750	.175	.656	.175
CQR32A-MC392-3-	200	.0039	G, J, K		.750	.175	.656	.175
CQR32A-MC472-3-	200	.0047	G, J, K		.750	.175	.656	.175
CQR32A-MC562-3-	200	.0056	G, J, K		.750	.175	.656	.175
CQR32A-MC682-3-	200	.0068	G, J, K		.750	.175	.656	.175
CQR32A-MC822-3-	200	.0082	G, J, K		.750	.175	.656	.175
CQR32A-MC103-3-	200	.010	G, J, K		.750	.175	.656	.175
CQR32A-MC123-3-	200	.012	G, J, K		.719	.195	.625	.195
CQR32A-MC153-3-	200	.015	G, J, K		.719	.195	.625	.195
CQR32A-MC183-3-	200	.018	G, J, K		.719	.235	.625	.235
CQR32A-MC223-3-	200	.022	G, J, K		.719	.235	.625	.235
CQR32A-MC273-3-	200	.027	G, J, K		.719	.235	.625	.235
CQR32A-MC333-3-	200	.033	G, J, K		.719	.235	.625	.235
CQR32A-MC393-3-	200	.039	G, J, K		.719	.312	.625	.312
CQR32A-MC473-3-	200	.047	G, J, K		.719	.312	.625	.312
CQR32A-MC563-3-	200	.056	G, J, K		.844	.312	.750	.312
CQR32A-MC683-3-	200	.068	G, J, K		.844	.312	.750	.312
CQR32A-MC823-3-	200	.082	G, J, K		.844	.312	.750	.312
CQR32A-MC104-3-	200	.10	G, J, K		.844	.312	.750	.312
CQR32A-MC124-3-	200	.12	G, J, K		.812	.400	.719	.400
CQR32A-MC154-3-	200	.15	G, J, K		.812	.400	.719	.400
CQR32A-MC184-3-	200	.18	G, J, K		1.062	.400	.969	.400
CQR32A-MC224-3-	200	.22	G, J, K		1.062	.400	.969	.400
CQR32A-MC274-3-	200	.27	G, J, K		1.250	.400	1.156	.400
CQR32A-MC334-3-	200	.33	G, J, K		1.250	.400	1.156	.400
CQR32A-MC394-3-	200	.39	G, J, K		1.188	.500	1.094	.500
CQR32A-MC474-3-	200	.47	G, J, K		1.188	.500	1.094	.500
CQR32A-MC564-3-	200	.56	G, J, K		1.375	.562	1.281	.562
CQR32A-MC684-3-	200	.68	G, J, K		1.375	.562	1.281	.562
CQR32A-MC824-3-	200	.82	G, J, K		1.875	.562	1.781	.562
CQR32A-MC105-3-	200	1.0	G, J, K	L,M,P,R,S	1.875	.562	1.781	.562

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR32 capacitors. Continued

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions			
					Circuit 1		Circuit 3	
					L±.031	D+.015 -.005	L±.031	D+.015 -.005
	Volts	μF			Inches	Inches	Inches	Inches
CQR32A-ME102-3-	400	.0010	G, J, K	L,M,P,R,S	.812	.235	.719	.235
CQR32A-ME122-3-	400	.0012	G, J, K		.812	.235	.719	.235
CQR32A-ME152-3-	400	.0015	G, J, K		.812	.235	.719	.235
CQR32A-ME182-3-	400	.0018	G, J, K		.812	.235	.719	.235
CQR32A-ME222-3-	400	.0022	G, J, K		.812	.235	.719	.235
CQR32A-ME272-3-	400	.0027	G, J, K		.812	.235	.719	.235
CQR32A-ME332-3-	400	.0033	G, J, K		.812	.235	.719	.235
CQR32A-ME392-3-	400	.0039	G, J, K		.812	.235	.719	.235
CQR32A-ME472-3-	400	.0047	G, J, K		.812	.235	.719	.235
CQR32A-ME562-3-	400	.0056	G, J, K		.938	.312	.844	.312
CQR32A-ME682-3-	400	.0068	G, J, K		.938	.312	.844	.312
CQR32A-ME822-3-	400	.0082	G, J, K		.938	.312	.844	.312
CQR32A-ME103-3-	400	.010	G, J, K		.938	.312	.844	.312
CQR32A-ME123-3-	400	.012	G, J, K		.938	.312	.844	.312
CQR32A-ME153-3-	400	.015	G, J, K		.938	.312	.844	.312
CQR32A-ME183-3-	400	.018	G, J, K		1.062	.312	.969	.312
CQR32A-ME223-3-	400	.022	G, J, K		1.062	.312	.969	.312
CQR32A-ME273-3-	400	.027	G, J, K		.938	.400	.844	.400
CQR32A-ME333-3-	400	.033	G, J, K		.938	.400	.844	.400
CQR32A-ME393-3-	400	.039	G, J, K		1.062	.400	.969	.400
CQR32A-ME473-3-	400	.047	G, J, K		1.062	.400	.969	.400
CQR32A-ME563-3-	400	.056	G, J, K		1.250	.400	1.156	.400
CQR32A-ME683-3-	400	.068	G, J, K		1.250	.400	1.156	.400
CQR32A-ME823-3-	400	.082	G, J, K		1.562	.400	1.469	.400
CQR32A-ME104-3-	400	.10	G, J, K		1.562	.400	1.469	.400
CQR32A-ME124-3-	400	.12	G, J, K		1.281	.562	1.188	.562
CQR32A-ME154-3-	400	.15	G, J, K		1.281	.562	1.188	.562
CQR32A-ME184-3-	400	.18	G, J, K		1.531	.562	1.438	.562
CQR32A-ME224-3-	400	.22	G, J, K		1.531	.562	1.438	.562
CQR32A-ME274-3-	400	.27	G, J, K		1.906	.562	1.812	.562
CQR32A-ME334-3-	400	.33	G, J, K		1.906	.562	1.812	.562
CQR32A-ME394-3-	400	.39	G, J, K		1.906	.670	1.812	.670
CQR32A-ME474-3-	400	.47	G, J, K		1.906	.670	1.812	.670
CQR32A-ME564-3-	400	.56	G, J, K		2.156	.750	2.062	.750
CQR32A-ME684-3-	400	.68	G, J, K		2.156	.750	2.062	.750
CQR32A-ME824-3-	400	.82	G, J, K		2.656	.750	2.562	.750
CQR32A-ME105-3-	400	1.0	G, J, K		2.656	.750	2.562	.750
CQR32A-MF102-3-	600	.0010	G, J, K		.812	.235	.719	.235
CQR32A-MF122-3-	600	.0012	G, J, K		.812	.235	.719	.235
CQR32A-MF152-3-	600	.0015	G, J, K		.812	.235	.719	.235
CQR32A-MF182-3-	600	.0018	G, J, K		.812	.235	.719	.235
CQR32A-MF222-3-	600	.0022	G, J, K		.812	.235	.719	.235
CQR32A-MF272-3-	600	.0027	G, J, K		.812	.235	.719	.235
CQR32A-MF332-3-	600	.0033	G, J, K		.938	.312	.844	.312
CQR32A-MF392-3-	600	.0039	G, J, K		.938	.312	.844	.312
CQR32A-MF472-3-	600	.0047	G, J, K		.938	.312	.844	.312
CQR32A-MF562-3-	600	.0056	G, J, K		.938	.312	.844	.312
CQR32A-MF682-3-	600	.0068	G, J, K	L,M,P,R,S	.938	.312	.844	.312

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR32 capacitors. Continued

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions			
					Circuit 1		Circuit 3	
					L±.031	D+.015 -.005	L±.031	D+.015 -.005
	Volts	μF			Inches	Inches	Inches	Inches
CQR32A-MF822-3-	600	.0082	G, J, K	L,M,P,R,S	1.062	.312	.969	.312
CQR32A-MF103-3-	600	.010	G, J, K		1.062	.312	.969	.312
CQR32A-MF123-3-	600	.012	G, J, K		.938	.400	.844	.400
CQR32A-MF153-3-	600	.015	G, J, K		.938	.400	.844	.400
CQR32A-MF183-3-	600	.018	G, J, K		1.062	.400	.969	.400
CQR32A-MF223-3-	600	.022	G, J, K		1.062	.400	.969	.400
CQR32A-MF273-3-	600	.027	G, J, K		1.312	.400	1.219	.400
CQR32A-MF333-3-	600	.033	G, J, K		1.312	.400	1.219	.400
CQR32A-MF393-3-	600	.039	G, J, K		1.562	.400	1.469	.400
CQR32A-MF473-3-	600	.047	G, J, K		1.562	.400	1.469	.400
CQR32A-MF563-3-	600	.056	G, J, K		1.250	.562	1.156	.562
CQR32A-MF683-3-	600	.068	G, J, K		1.250	.562	1.156	.562
CQR32A-MF823-3-	600	.082	G, J, K		1.500	.562	1.406	.562
CQR32A-MF104-3-	600	.10	G, J, K		1.500	.562	1.406	.562
CQR32A-MF124-3-	600	.12	G, J, K		1.875	.562	1.781	.562
CQR32A-MF154-3-	600	.15	G, J, K		1.875	.562	1.781	.562
CQR32A-MF184-3-	600	.18	G, J, K		1.875	.670	1.781	.670
CQR32A-MF224-3-	600	.22	G, J, K		1.875	.670	1.781	.670
CQR32A-MF274-3-	600	.27	G, J, K		2.125	.750	2.031	.750
CQR32A-MF334-3-	600	.33	G, J, K		2.125	.750	2.031	.750
CQR32A-MF394-3-	600	.39	G, J, K		2.265	.750	2.531	.750
CQR32A-MF474-3-	600	.47	G, J, K		2.265	.750	2.531	.750
CQR32A-MF564-3-	600	.56	G, J, K		2.125	1.000	2.031	1.000
CQR32A-MF684-3-	600	.68	G, J, K		2.125	1.000	2.031	1.000
CQR32A-MG102-3-	1000	.0010	G, J, K		.938	.312	.844	.312
CQR32A-MG122-3-	1000	.0012	G, J, K		.938	.312	.844	.312
CQR32A-MG152-3-	1000	.0015	G, J, K		.938	.312	.844	.312
CQR32A-MG182-3-	1000	.0018	G, J, K		.938	.312	.844	.312
CQR32A-MG222-3-	1000	.0022	G, J, K		.938	.312	.844	.312
CQR32A-MG272-3-	1000	.0027	G, J, K		.938	.312	.844	.312
CQR32A-MG332-3-	1000	.0033	G, J, K		.938	.312	.844	.312
CQR32A-MG392-3-	1000	.0039	G, J, K		.938	.400	.844	.400
CQR32A-MG472-3-	1000	.0047	G, J, K		.938	.400	.844	.400
CQR32A-MG562-3-	1000	.0056	G, J, K		1.062	.400	.969	.400
CQR32A-MG682-3-	1000	.0068	G, J, K		1.062	.400	.969	.400
CQR32A-MG822-3-	1000	.0082	G, J, K		1.312	.400	1.219	.400
CQR32A-MG103-3-	1000	.010	G, J, K		1.312	.400	1.219	.400
CQR32A-MG123-3-	1000	.012	G, J, K		1.562	.400	1.469	.400
CQR32A-MG183-3-	1000	.018	G, J, K		1.562	.400	1.469	.400
CQR32A-MG223-3-	1000	.022	G, J, K		1.250	.562	1.156	.562
CQR32A-MG273-3-	1000	.027	G, J, K		1.250	.562	1.156	.562
CQR32A-MG333-3-	1000	.033	G, J, K		1.500	.562	1.406	.562
CQR32A-MG393-3-	1000	.039	G, J, K		1.875	.562	1.781	.562
CQR32A-MG473-3-	1000	.047	G, J, K	L,M,P,R,S	1.875	.562	1.781	.562

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR32 capacitors. Continued

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions			
					Circuit 1		Circuit 3	
					L±.031	D+.015 -.005	L±.031	D+.015 -.005
	Volts	μF			Inches	Inches	Inches	Inches
CQR32A-MG563-3-	1000	.056	G,J,K	L,M,P,R,S	1.875	.670	1.781	.670
CQR32A-MG683-3-	1000	.068	G,J,K		1.875	.670	1.781	.670
CQR32A-MG823-3-	1000	.082	G,J,K		2.125	.750	2.031	.750
CQR32A-MG104-3-	1000	.10	G,J,K		2.125	.750	2.031	.750
CQR32A-MG124-3-	1000	.12	G,J,K		1.875	1.000	1.781	1.000
CQR32A-MG154-3-	1000	.15	G,J,K		1.875	1.000	1.781	1.000
CQR32A-MG184-3-	1000	.18	G,J,K		2.375	1.000	2.281	1.000
CQR32A-MG224-3-	1000	.22	G,J,K	L,M,P,R,S	2.375	1.000	2.281	1.000

1/ Complete part number shall include additional symbols to indicate circuit, capacitance tolerance, and failure rate level, as applicable.

TABLE III. Millimeter equivalents of decimal inches.

INCHES	MM	INCHES	MM
0.005	0.13	1.156	29.36
0.015	0.38	1.188	30.17
0.031	0.79	1.219	30.96
0.175	4.45	1.250	31.75
0.195	4.95	1.281	32.54
0.235	5.97	1.312	33.32
0.312	7.92	1.375	34.93
0.400	10.16	1.406	35.71
0.406	10.31	1.438	36.53
0.468	11.89	1.469	37.31
0.500	12.70	1.500	38.10
0.562	14.27	1.531	38.89
0.625	15.88	1.562	39.67
0.656	16.66	1.625	41.27
0.670	17.02	1.781	45.24
0.719	18.26	1.812	46.02
0.750	19.05	1.875	47.63
0.781	19.84	1.906	48.41
0.812	20.62	2.031	51.59
0.844	21.44	2.062	52.37
0.875	22.23	2.125	53.97
0.906	23.01	2.156	54.76
0.938	23.72	2.265	57.53
0.969	24.61	2.281	57.94
1.000	25.40	2.375	60.33
1.031	26.19	2.531	64.29
1.062	26.97	2.562	65.07
1.094	27.79	2.625	66.67
1.125	28.57	2.656	67.46

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

Dielectric absorption (not applicable to values of 0.01 μF or less): 0.60 percent, maximum.

Stability at low and high temperature:
Low temperature:
Test temperature - $-65^{\circ}\ ^{+0^{\circ}}_{-5^{\circ}}$C.

Capacitance change (max) - -7 percent.
High temperature:
Test temperature - $+85^{\circ}\ ^{+5^{\circ}}_{-0^{\circ}}$C.

Capacitance change (max) - +5 percent.

Life:
Capacitance change (max) - ±5 percent of initial measured value.

Resistance to soldering heat: In accordance with MIL-C-19978.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - MI, MU
Navy - AS
Air Force - 11, 17
DSA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS, OS, SH
Air Force -

Preparing activity:
Air Force - 80

Agent:
DSA - ES

(Project 5910-1072-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.