
INCH-POUND
MIL-PRF-19978/14B
20 July 2016
SUPERSEDING
MIL-PRF-19978/14A
w/AMENDMENT 1
11 March 2004

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, PLASTIC DIELECTRIC, AXIAL-WIRE TERMINAL, TANGENTIAL RETAINER, TUBULAR (UNINSULATED) (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CQR32

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and MIL-PRF-19978.

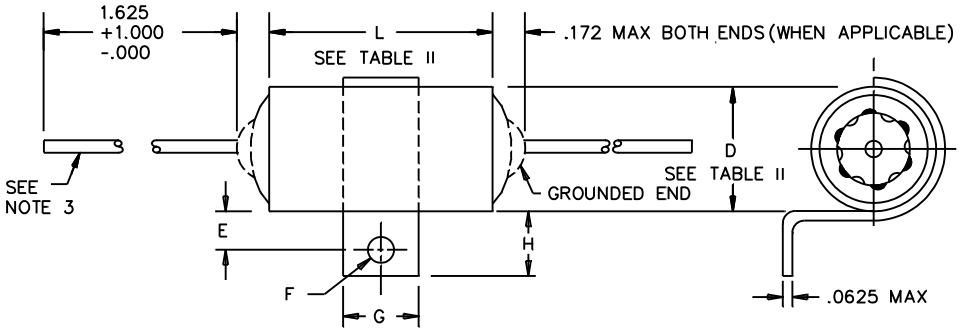

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.0625	1.59	.250	6.35
.004	0.10	.144	3.66	.312	7.92
.005	0.13	.156	3.96	.400	10.16
.020	0.51	.172	4.37	.438	11.13
.025	0.64	.175	4.45	.500	12.70
.031	0.79	.188	4.78	.562	14.27
.032	0.81	.195	4.95	1.000	25.40
.062	1.57	.235	5.97	1.625	41.28

Case dimension D	H ± .062	G ± .062	E ± .031	F ± .005
Less than .500	.312	.250	.188	.144
.500 and up	.438	.500	.250	.156

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Leads shall be of solder coated solid wire, .020 inch (No. 24 AWG) for cases .175 inch and .195 inch in diameter; .025 inch (No. 22 AWG) for cases .235 inch through .312 inch diameter; and .032 inch (No. 20 AWG) for cases .400 inch diameter and above. Tolerance on all lead wire diameters shall be + .004 inch, -.001 inch.

FIGURE 1. Style CQR32 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table II.

Case material: Nonmagnetic (end seal may be of magnetic material).

Terminals: Axial-wire lead (see figure 1).



Rated voltage: See table II.

Rated temperature: -65°C to +85°C.

Capacitance (Cap.) (nom): See table II.

Capacitance tolerance: See table II.

Dissipation factor (DF) (max): 0.6 percent.

Failure rate level: In accordance with MIL-PRF-19978.

Reliability: In accordance with MIL-PRF-19978.

Burn-in: In accordance with MIL-PRF-19978.

Radiographic inspection: In accordance with MIL-PRF-19978.

Seal: Method 112 of MIL-STD-202, test condition letter A.

Barometric pressure: In accordance with MIL-PRF-19978.

Test points:

Circuit diagram 1: Between terminals and case.

Circuit diagram 3: Between ungrounded terminal and case.

Insulation resistance (IR):

Terminal to terminal: See table I.

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B, with the following exception:

Direction and duration of motion: 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Salt spray (corrosion): In accordance with MIL-PRF-19978.

Solderability: In accordance with MIL-PRF-19978.

Terminal strength: Method 211 of MIL-STD-202, test condition letter D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE I. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
Characteristic M	
	At +25°C
0 to 0.68 microfarad	100,000 megohms
Greater than 0.68 microfarad	68,000 megohm-microfarads 1/
	At +85°C
0 to 0.2 microfarad	25,000 megohms
Greater than 0.2 microfarad	5,000 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

TABLE II. STYLES CQR32 capacitors.

Part or identifying number (PIN) 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ±.031	D +.015, -.005	L ±.031	D +.015, -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR32A-MZ155-3-	30	1.5	G, J, K	M, P, R, S	1.625	.562	1.531	.562
CQR32A-MZ225-3-	30	2.2	G, J, K	M, P, R, S	1.875	.670	1.781	.670
CQR32A-MZ335-3-	30	3.3	G, J, K	M, P, R, S	1.875	.750	1.781	.750
CQR32A-MZ475-3-	30	4.7	G, J, K	M, P, R, S	2.625	.750	2.531	.750
CQR32A-MZ685-3-	30	6.8	G, J, K	M, P, R, S	2.125	1.000	2.031	1.000
CQR32A-MZ106-3-	30	10.0	G, J, K	M, P, R, S	2.375	1.000	2.281	1.000
CQR32A-MA102-3-	50	.0010	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA122-3-	50	.0012	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA152-3-	50	.0015	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA182-3-	50	.0018	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA222-3-	50	.0022	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA272-3-	50	.0027	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA332-3-	50	.0033	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA392-3-	50	.0039	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA472-3-	50	.0047	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA562-3-	50	.0056	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA682-3-	50	.0068	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA822-3-	50	.0082	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA103-3-	50	.010	G, J, K	M, P, R, S	.500	.175	.406	.175
CQR32A-MA123-3-	50	.012	G, J, K	M, P, R, S	.500	.235	.406	.235
CQR32A-MA153-3-	50	.015	G, J, K	M, P, R, S	.500	.235	.406	.235
CQR32A-MA183-3-	50	.018	G, J, K	M, P, R, S	.500	.235	.406	.235
CQR32A-MA223-3-	50	.022	G, J, K	M, P, R, S	.500	.235	.406	.235
CQR32A-MA273-3-	50	.027	G, J, K	M, P, R, S	.500	.312	.406	.312
CQR32A-MA333-3-	50	.033	G, J, K	M, P, R, S	.500	.312	.406	.312
CQR32A-MA393-3-	50	.039	G, J, K	M, P, R, S	.500	.312	.406	.312
CQR32A-MA473-3-	50	.047	G, J, K	M, P, R, S	.500	.312	.406	.312
CQR32A-MA563-3-	50	.056	G, J, K	M, P, R, S	.562	.312	.468	.312
CQR32A-MA683-3-	50	.068	G, J, K	M, P, R, S	.562	.312	.468	.312
CQR32A-MA124-3-	50	.12	G, J, K	M, P, R, S	.875	.312	.781	.312
CQR32A-MA154-3-	50	.15	G, J, K	M, P, R, S	.875	.312	.781	.312
CQR32A-MA184-3-	50	.18	G, J, K	M, P, R, S	.875	.400	.781	.400
CQR32A-MA224-3-	50	.22	G, J, K	M, P, R, S	.875	.400	.781	.400
CQR32A-MA274-3-	50	.27	G, J, K	M, P, R, S	.875	.400	.781	.400

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. STYLES CQR32 capacitors - Continued.

Part or identifying number (PIN) 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ±.031	D +.015, -.005	L ±.031	D +.015, -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR32A-MA334-3-	50	.33	G, J, K	M, P, R, S	1.000	.400	.906	.400
CQR32A-MA394-3-	50	.39	G, J, K	M, P, R, S	1.125	.400	1.031	.400
CQR32A-MA474-3-	50	.47	G, J, K	M, P, R, S	1.125	.400	1.031	.400
CQR32A-MA564-3-	50	.56	G, J, K	M, P, R, S	1.375	.400	1.281	.400
CQR32A-MA684-3-	50	.68	G, J, K	M, P, R, S	1.375	.400	1.281	.400
CQR32A-MA824-3-	50	.82	G, J, K	M, P, R, S	1.125	.562	1.031	.562
CQR32A-MA105-3-	50	1.0	G, J, K	M, P, R, S	1.125	.562	1.031	.562
CQR32A-MA125-3-	50	1.2	G, J, K	M, P, R, S	1.375	.562	1.281	.562
CQR32A-MB125-3-	100	1.2	G, J, K	M, P, R, S	1.625	.670	1.531	.670
CQR32A-MB155-3-	100	1.5	G, J, K	M, P, R, S	1.625	.670	1.531	.670
CQR32A-MB185-3-	100	1.8	G, J, K	M, P, R, S	1.625	.670	1.531	.670
CQR32A-MB225-3-	100	2.2	G, J, K	M, P, R, S	1.875	.750	1.781	.750
CQR32A-MB275-3-	100	2.7	G, J, K	M, P, R, S	2.125	.750	2.031	.750
CQR32A-MB335-3-	100	3.3	G, J, K	M, P, R, S	2.375	.750	2.281	.750
CQR32A-MB395-3-	100	3.9	G, J, K	M, P, R, S	1.875	1.000	1.781	1.000
CQR32A-MB475-3-	100	4.7	G, J, K	M, P, R, S	2.125	1.000	2.031	1.000
CQR32A-MB565-3-	100	5.6	G, J, K	M, P, R, S	2.375	1.000	2.281	1.000
CQR32A-MB685-3-	100	6.8	G, J, K	M, P, R, S	2.625	1.000	2.531	1.000
CQR32A-MC102-3-	200	.0010	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC122-3-	200	.0012	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC152-3-	200	.0015	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC182-3-	200	.0018	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC222-3-	200	.0022	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC272-3-	200	.0027	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC332-3-	200	.0033	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC392-3-	200	.0039	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC472-3-	200	.0047	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC562-3-	200	.0056	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC682-3-	200	.0068	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC822-3-	200	.0082	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC103-3-	200	.010	G, J, K	M, P, R, S	.750	.175	.656	.175
CQR32A-MC123-3-	200	.012	G, J, K	M, P, R, S	.719	.195	.625	.195
CQR32A-MC153-3-	200	.015	G, J, K	M, P, R, S	.719	.195	.625	.195
CQR32A-MC183-3-	200	.018	G, J, K	M, P, R, S	.719	.235	.625	.235
CQR32A-MC223-3-	200	.022	G, J, K	M, P, R, S	.719	.235	.625	.235
CQR32A-MC273-3-	200	.027	G, J, K	M, P, R, S	.719	.235	.625	.235
CQR32A-MC333-3-	200	.033	G, J, K	M, P, R, S	.719	.235	.625	.235
CQR32A-MC393-3-	200	.039	G, J, K	M, P, R, S	.719	.312	.625	.312
CQR32A-MC473-3-	200	.047	G, J, K	M, P, R, S	.719	.312	.625	.312
CQR32A-MC563-3-	200	.056	G, J, K	M, P, R, S	.844	.312	.750	.312
CQR32A-MC683-3-	200	.068	G, J, K	M, P, R, S	.844	.312	.750	.312
CQR32A-MC823-3-	200	.082	G, J, K	M, P, R, S	.844	.312	.750	.312
CQR32A-MC104-3-	200	.10	G, J, K	M, P, R, S	.844	.312	.750	.312
CQR32A-MC124-3-	200	.12	G, J, K	M, P, R, S	.812	.400	.719	.400
CQR32A-MC154-3-	200	.15	G, J, K	M, P, R, S	.812	.400	.719	.400
CQR32A-MC184-3-	200	.18	G, J, K	M, P, R, S	1.062	.400	.969	.400
CQR32A-MC224-3-	200	.22	G, J, K	M, P, R, S	1.062	.400	.969	.400
CQR32A-MC274-3-	200	.27	G, J, K	M, P, R, S	1.250	.400	1.156	.400

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. STYLES CQR32 capacitors - Continued.

Part or identifying number (PIN) 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ±.031	D +.015, -.005	L ±.031	D +.015, -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR32A-MC334-3-	200	.33	G, J, K	M, P, R, S	1.250	.400	1.156	.400
CQR32A-MC394-3-	200	.39	G, J, K	M, P, R, S	1.188	.500	1.094	.500
CQR32A-MC474-3-	200	.47	G, J, K	M, P, R, S	1.188	.500	1.094	.500
CQR32A-MC564-3-	200	.56	G, J, K	M, P, R, S	1.375	.562	1.281	.562
CQR32A-MC684-3-	200	.68	G, J, K	M, P, R, S	1.375	.562	1.281	.562
CQR32A-MC824-3-	200	.82	G, J, K	M, P, R, S	1.875	.562	1.781	.562
CQR32A-MC105-3-	200	1.0	G, J, K	M, P, R, S	1.875	.562	1.781	.562
CQR32A-ME102-3-	400	.0010	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-ME122-3-	400	.0012	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-ME152-3-	400	.0015	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-ME182-3-	400	.0018	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-ME222-3-	400	.0022	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-ME272-3-	400	.0027	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-ME332-3-	400	.0033	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-ME392-3-	400	.0039	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-ME472-3-	400	.0047	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-ME562-3-	400	.0056	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-ME682-3-	400	.0068	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-ME822-3-	400	.0082	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-ME103-3-	400	.010	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-ME123-3-	400	.012	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-ME153-3-	400	.015	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-ME183-3-	400	.018	G, J, K	M, P, R, S	1.062	.312	.969	.312
CQR32A-ME223-3-	400	.022	G, J, K	M, P, R, S	1.062	.312	.969	.312
CQR32A-ME273-3-	400	.027	G, J, K	M, P, R, S	.938	.400	.844	.400
CQR32A-ME333-3-	400	.033	G, J, K	M, P, R, S	.938	.400	.844	.400
CQR32A-ME393-3-	400	.039	G, J, K	M, P, R, S	1.062	.400	.969	.400
CQR32A-ME473-3-	400	.047	G, J, K	M, P, R, S	1.062	.400	.969	.400
CQR32A-ME563-3-	400	.056	G, J, K	M, P, R, S	1.250	.400	1.156	.400
CQR32A-ME683-3-	400	.068	G, J, K	M, P, R, S	1.250	.400	1.156	.400
CQR32A-ME823-3-	400	.082	G, J, K	M, P, R, S	1.562	.400	1.469	.400
CQR32A-ME104-3-	400	.10	G, J, K	M, P, R, S	1.562	.400	1.469	.400
CQR32A-ME124-3-	400	.12	G, J, K	M, P, R, S	1.281	.562	1.188	.562
CQR32A-ME154-3-	400	.15	G, J, K	M, P, R, S	1.281	.562	1.188	.562
CQR32A-ME184-3-	400	.18	G, J, K	M, P, R, S	1.531	.562	1.438	.562
CQR32A-ME224-3-	400	.22	G, J, K	M, P, R, S	1.531	.562	1.438	.562
CQR32A-ME274-3-	400	.27	G, J, K	M, P, R, S	1.906	.562	1.812	.562
CQR32A-ME334-3-	400	.33	G, J, K	M, P, R, S	1.906	.562	1.812	.562
CQR32A-ME394-3-	400	.39	G, J, K	M, P, R, S	1.906	.670	1.812	.670
CQR32A-ME474-3-	400	.47	G, J, K	M, P, R, S	1.906	.670	1.812	.670
CQR32A-ME564-3-	400	.56	G, J, K	M, P, R, S	2.156	.750	2.062	.750
CQR32A-ME684-3-	400	.68	G, J, K	M, P, R, S	2.156	.750	2.062	.750
CQR32A-ME824-3-	400	.82	G, J, K	M, P, R, S	2.656	.750	2.562	.750
CQR32A-ME105-3-	400	1.0	G, J, K	M, P, R, S	2.656	.750	2.562	.750
CQR32A-MF102-3-	600	.0010	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-MF122-3-	600	.0012	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-MF152-3-	600	.0015	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-MF182-3-	600	.0018	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-MF222-3-	600	.0022	G, J, K	M, P, R, S	.812	.235	.719	.235

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. STYLES CQR32 capacitors - Continued.

Part or identifying number (PIN) 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ±.031	D +.015, -.005	L ±.031	D +.015, -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR32A-MF272-3-	600	.0027	G, J, K	M, P, R, S	.812	.235	.719	.235
CQR32A-MF332-3-	600	.0033	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MF392-3-	600	.0039	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MF472-3-	600	.0047	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MF562-3-	600	.0056	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MF682-3-	600	.0068	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MF822-3-	600	.0082	G, J, K	M, P, R, S	1.062	.312	.969	.312
CQR32A-MF103-3-	600	.010	G, J, K	M, P, R, S	1.062	.312	.969	.312
CQR32A-MF123-3-	600	.012	G, J, K	M, P, R, S	.938	.400	.844	.400
CQR32A-MF153-3-	600	.015	G, J, K	M, P, R, S	.938	.400	.844	.400
CQR32A-MF183-3-	600	.018	G, J, K	M, P, R, S	1.062	.400	.969	.400
CQR32A-MF223-3-	600	.022	G, J, K	M, P, R, S	1.062	.400	.969	.400
CQR32A-MF273-3-	600	.027	G, J, K	M, P, R, S	1.312	.400	1.219	.400
CQR32A-MF333-3-	600	.033	G, J, K	M, P, R, S	1.312	.400	1.219	.400
CQR32A-MF393-3-	600	.039	G, J, K	M, P, R, S	1.562	.400	1.469	.400
CQR32A-MF473-3-	600	.047	G, J, K	M, P, R, S	1.562	.400	1.469	.400
CQR32A-MF563-3-	600	.056	G, J, K	M, P, R, S	1.250	.562	1.156	.562
CQR32A-MF683-3-	600	.068	G, J, K	M, P, R, S	1.250	.562	1.156	.562
CQR32A-MF823-3-	600	.082	G, J, K	M, P, R, S	1.500	.562	1.406	.562
CQR32A-MF104-3-	600	.10	G, J, K	M, P, R, S	1.500	.562	1.406	.562
CQR32A-MF124-3-	600	.12	G, J, K	M, P, R, S	1.875	.562	1.781	.562
CQR32A-MF154-3-	600	.15	G, J, K	M, P, R, S	1.875	.562	1.781	.562
CQR32A-MF184-3-	600	.18	G, J, K	M, P, R, S	1.875	.670	1.781	.670
CQR32A-MF224-3-	600	.22	G, J, K	M, P, R, S	1.875	.670	1.781	.670
CQR32A-MF274-3-	600	.27	G, J, K	M, P, R, S	2.125	.750	2.031	.750
CQR32A-MF334-3-	600	.33	G, J, K	M, P, R, S	2.125	.750	2.031	.750
CQR32A-MF394-3-	600	.39	G, J, K	M, P, R, S	2.625	.750	2.531	.750
CQR32A-MF474-3-	600	.47	G, J, K	M, P, R, S	2.625	.750	2.531	.750
CQR32A-MF564-3-	600	.56	G, J, K	M, P, R, S	2.125	1.000	2.031	1.000
CQR32A-MF684-3-	600	.68	G, J, K	M, P, R, S	2.125	1.000	2.031	1.000
CQR32A-MG102-3-	1000	.0010	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MG122-3-	1000	.0012	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MG152-3-	1000	.0015	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MG182-3-	1000	.0018	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MG222-3-	1000	.0022	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MG272-3-	1000	.0027	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MG332-3-	1000	.0033	G, J, K	M, P, R, S	.938	.312	.844	.312
CQR32A-MG392-3-	1000	.0039	G, J, K	M, P, R, S	.938	.400	.844	.400
CQR32A-MG472-3-	1000	.0047	G, J, K	M, P, R, S	.938	.400	.844	.400
CQR32A-MG562-3-	1000	.0056	G, J, K	M, P, R, S	1.062	.400	.969	.400
CQR32A-MG682-3-	1000	.0068	G, J, K	M, P, R, S	1.062	.400	.969	.400
CQR32A-MG822-3-	1000	.0082	G, J, K	M, P, R, S	1.312	.400	1.219	.400
CQR32A-MG103-3-	1000	.010	G, J, K	M, P, R, S	1.312	.400	1.219	.400
CQR32A-MG123-3-	1000	.012	G, J, K	M, P, R, S	1.562	.400	1.469	.400
CQR32A-MG183-3-	1000	.018	G, J, K	M, P, R, S	1.562	.400	1.469	.400
CQR32A-MG223-3-	1000	.022	G, J, K	M, P, R, S	1.250	.562	1.156	.562
CQR32A-MG273-3-	1000	.027	G, J, K	M, P, R, S	1.250	.562	1.156	.562
CQR32A-MG333-3-	1000	.033	G, J, K	M, P, R, S	1.500	.562	1.406	.562
CQR32A-MG393-3-	1000	.039	G, J, K	M, P, R, S	1.875	.562	1.781	.562

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

TABLE II. STYLES CQR32 capacitors - Continued.

Part or identifying number (PIN) 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions 2/			
					Circuit 1		Circuit 3	
					L ±.031	D +.015, -.005	L ±.031	D +.015, -.005
	Volts	μF			Inches	Inches	Inches	Inches
CQR32A-MG473-3-	1000	.047	G, J, K	M, P, R, S	1.875	.562	1.781	.562
CQR32A-MG563-3-	1000	.056	G, J, K	M, P, R, S	1.875	.670	1.781	.670
CQR32A-MG683-3-	1000	.068	G, J, K	M, P, R, S	1.875	.670	1.781	.670
CQR32A-MG823-3-	1000	.082	G, J, K	M, P, R, S	2.125	.750	2.031	.750
CQR32A-MG104-3-	1000	.10	G, J, K	M, P, R, S	2.125	.750	2.031	.750
CQR32A-MG124-3-	1000	.12	G, J, K	M, P, R, S	1.875	1.000	1.781	1.000
CQR32A-MG154-3-	1000	.15	G, J, K	M, P, R, S	1.875	1.000	1.781	1.000
CQR32A-MG184-3-	1000	.18	G, J, K	M, P, R, S	2.375	1.000	2.281	1.000
CQR32A-MG224-3-	1000	.22	G, J, K	M, P, R, S	2.375	1.000	2.281	1.000

1/ Part or Identifying Number (PIN) shall include additional symbols to indicate circuit symbol, capacitance tolerance, and failure rate level, as applicable.
2/ See table III for metric equivalents.

TABLE III. Millimeter equivalent of decimal inches.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.719	18.26	1.188	30.17	1.875	47.63
.015	0.38	.750	19.05	1.219	30.96	1.906	48.41
.031	0.79	.781	19.84	1.250	31.75	2.031	51.59
.175	4.45	.812	20.62	1.281	32.54	2.062	52.37
.195	4.95	.844	21.44	1.312	33.32	2.125	53.98
.235	5.97	.875	22.23	1.375	34.93	2.156	54.76
.312	7.92	.906	23.01	1.406	35.71	2.281	57.94
.400	10.16	.938	23.72	1.438	36.53	2.375	60.33
.406	10.31	.969	24.61	1.469	37.31	2.531	64.29
.468	11.89	1.000	25.40	1.500	38.10	2.562	65.07
.500	12.70	1.031	26.19	1.531	38.89	2.625	66.68
.562	14.27	1.062	26.97	1.562	39.67	2.656	67.46
.625	15.88	1.094	27.79	1.625	41.28		
.656	16.66	1.125	28.58	1.781	45.24		
.670	17.02	1.156	29.36	1.812	46.02		

Dielectric absorption (not applicable to values of 0.01 μF or less): 0.60 percent, maximum.

Stability at low and high temperature:

Low temperature:

Test temperature: -65°C +0°C, -5°C.

Capacitance change (max): -7 percent.

High temperature:

Test temperature: +85°C +5°C, -0°C.

Capacitance change (max): +5 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.

Life:

Capacitance change (max): ±5 of initial measured value percent.

Resistance to soldering heat: In accordance with MIL-PRF-19978.

Referenced documents. In addition to MIL-PRF-19978, this document references the following:

MIL-STD-202-112
MIL-STD-202-204
MIL-STD-202-211

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2016-025)

Review activities:
Navy - MC
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:06Z
Check the source to verify that this is the current version before use.