MIL-C-19978/3E
15 April 1977
SUPERSEDING
MIL-C-19978/3D
30 August 1974, and
MIL-C-25/7E
21 June 1968

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, PLASTIC (OR PAPER-PLASTIC) DIELECTRIC, (HERMETICALLY SEALED IN METAL CASES), STYLE CQ72

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-19978.

Ⓔ

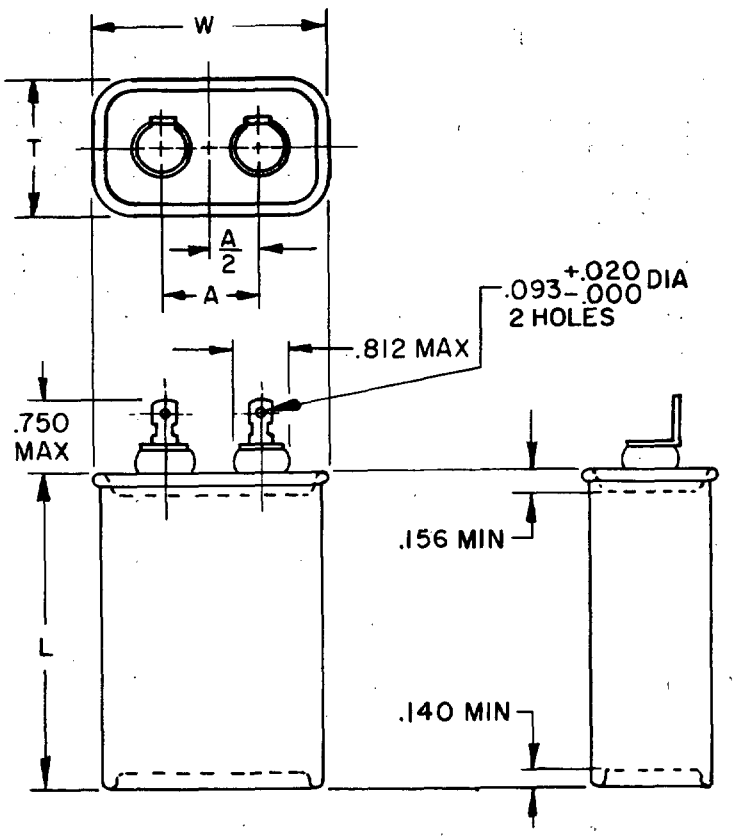


FIGURE 1. Style CQ72 capacitors.

Ⓔ denotes changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

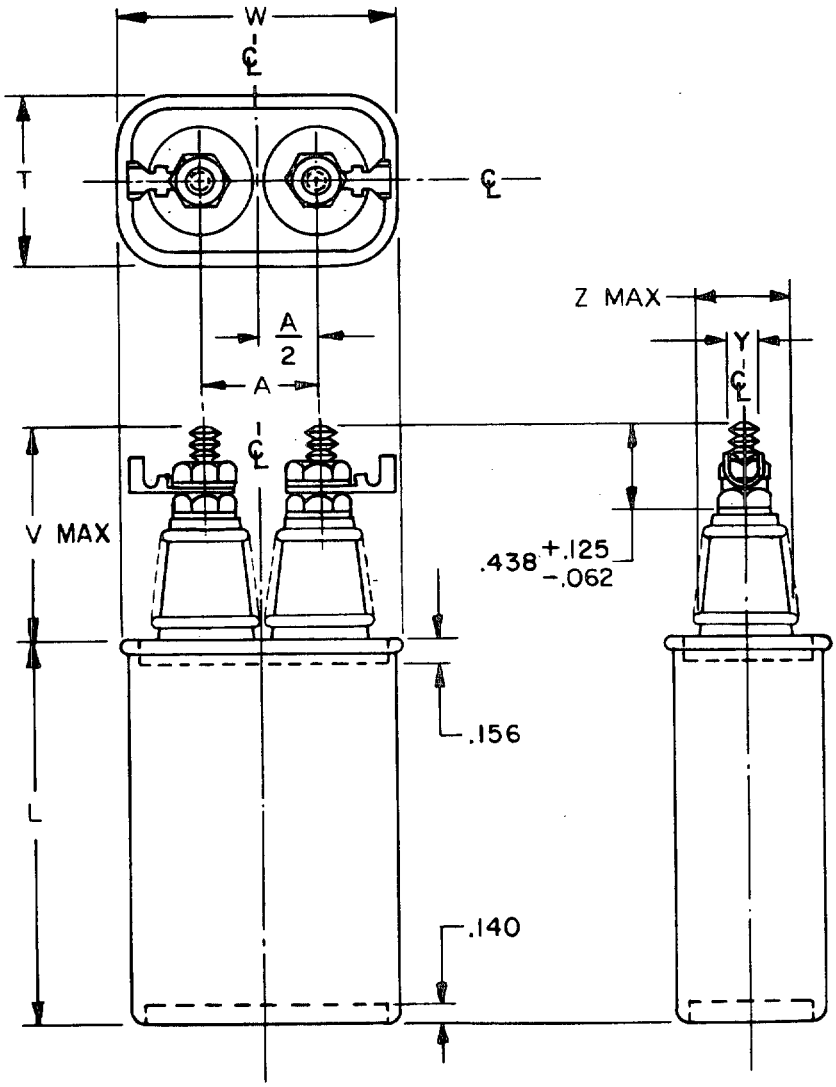


FIGURE 1. Style CQ72 capacitors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

Symbol	Type of terminal
B	Solder lug (nonremovable)
D, H	Pillar insulator (for use at altitudes up to 7, 500 feet)
E	Pillar insulator (for use at altitudes up to 50, 000 feet)

Ⓔ

Terminal number	Terminal symbols	Terminal dimensions			
		V, max	Y, min	Y, max	Z
1	B	.75			.812
2	E	1.375	.190-32 UNF-2A	.216-24 UNC-2A	.812
3	E	1.75	.190-32 UNF-2A	.216-24 UNC-2A	1.00
4	D, E	2.75	.190-32 UNF-2A	.3125-18 UNC-2A	1.438
5	H	4.250	.375-16 UNC-2A	.500-13 UNC-2A	3.000

Ⓔ

INCHES	MM
.020	.51
.062	1.57
.063	1.60
.093	2.36
.125	3.18
.140	3.56
.156	3.69
.438	11.13
.75	19.05
.812	20.62
1.00	25.40
1.375	34.93
1.438	36.53
1.75	44.45
2.75	69.85
3.000	76.20
4.250	107.95


NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±.02 (.51 mm) for two place decimals.
4. Shape of terminal B (drilled, punched, forked, or slotted) is optional.
5. Capacitors having terminal D or E shall be supplied with necessary terminal hardware for each terminal (two nuts (one of these may be a fixed cap nut on the bushing) and one lockwasher); in addition, capacitors rated at 3, 000 volts dc or less shall be supplied with a solder lug capable of accommodating a wire of .063 (1.60 mm) (No. 14 AWG) for each terminal.

FIGURE 1. Style CQ72 capacitors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure 1 and table II.
Construction - Extended foil or laid-in tab.
Case and retainer material - Metal, nonmagnetic or magnetic.
Dielectric material - Paper and polyethylene terephthalate.
Terminals - See figure 1.
Circuit diagram -



Rated voltage - See table II.
Rated temperature - -65° to +85°C (E)
-65° to +125°C (K)
-55° to +85°C (F and G).
Capacitance (cap.) (nom) - See table II.
Capacitance tolerance - (±10 percent).
Vibration grade - See table II.
Dissipation factor (DF) (max) - 1.0 percent.

Seal: Method 112 of MIL-STD-202, test condition letter - A, or in accordance with MIL-C-19978 (alternative test).

Barometric pressure: In accordance with MIL-C-19978; terminal D capacitors not applicable.
Test condition letter - B (3.44 inches of mercury - 50,000 feet).
Test points - Between ungrounded terminal and case.
Test potential - 125 percent of dc rated voltage.

Insulation resistance (IR):
Terminal to terminal - See table I.
Terminals to case - Greater than 10,000 megohms.

(E) Vibration:
Low frequency (grade 1) - Method 201 of MIL-STD-202.
High frequency (grade 3) - Method 204 of MIL-STD-202, test condition B, with the following exception:
Direction and duration of motion - 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Salt spray: In accordance with MIL-C-19978.

Solderability: Not applicable.

Terminal strength: Method 211 of MIL-STD-202, test condition letters - A and E.

Stability at low and high temperatures:
Low temperature:
Test temperature - $-55^{\circ}\ ^{+0^{\circ}}_{-5^{\circ}}$C (F and G) or $-65^{\circ}\ ^{+0^{\circ}}_{-5^{\circ}}$C (E and K).
Capacitance change (max) - (-10 percent).
High temperature:
Test temperature - +85°C (E, F, and G) or +125°C (K).
Capacitance change (max) - (+10 percent).

Life:
Capacitance change (max) - (±5 percent).

Resistance to soldering heat: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

TABLE I. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
Characteristic E	
	At 25°C
0 to 0.6 microfarad	25,000 megohms
Greater than 0.6 microfarad	15,000 megohm-microfarads 1/
	At 85°C
0 to 0.15 microfarad	2,000 megohms
Greater than 0.15 microfarad	300 megohm-microfarads 1/
Characteristic K	
	At 25°C
0 to 0.6 microfarad	25,000 megohms
Greater than 0.6 microfarad	15,000 megohm-microfarads 1/
	At 125°C
0 to 0.08 microfarad	250 megohms
Greater than 0.08 microfarad	20 megohm-microfarads 1/
Characteristic F	
	At 25°C
0.33 microfarad , and less	6,000 megohms
Greater than 0.33 microfarads	2,000 megohm-microfarads 1/
	At 85°C
0.033 microfarad and less	600 megohms
Greater than 0.033 microfarad	20 megohm-microfarads 1/
Characteristic G	
	At 25°C
0.33 microfarad and less	4,500 megohms
Greater than 0.33 microfarad	1,500 megohm-microfarads 1/
	At 85°C
0.033 microfarad and less	450 megohms
Greater than 0.033 microfarad	15 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

TABLE II. Style CQ72 capacitors.

Part number 1/	DC voltage rating	Capacitance	Vibration grade	Case size				Available terminal identification number			
				Characteristic				Terminal			
				E	K	F	G	B	D	E	H
	Volts	µF									(E)
CQ72-1KE254K3	400	0.25	3	--	A1	--	--	1	---	2	---
CQ72-1-E504K3	400	0.5	3	A1	A2	--	--	1	---	2	---
CQ72-1-E105K3	400	1.0	3	A1	A3	--	--	1	---	2	---
CQ72-1-E205K3	400	2	3	A2	A5	--	--	1	---	2	---
CQ72-1-E405K3	400	4	3	B2	B6	--	--	1	---	2	---
CQ72-1-E605K3	400	6	3	B6	C3	--	--	1	---	2	---
CQ72-1-E805K3	400	8	3	C3	D4	--	--	1	---	2	---
CQ72-1-E106K3	400	10	3	C4	E4	--	--	1	---	2	---
CQ72-1-E126K3	400	12	3	D2	E6	--	--	1	---	2	---
CQ72-1-E156K3	400	15	3	D5	G4	--	--	1	---	2	---
CQ72-1FF254K1	600	0.25	1	--	--	A1	--	1	---	2	---
CQ72-1-F504K3	600	0.5	3	A1	A2	--	--	1	---	2	---
CQ72-1-F105K-	600	1.0	1,3	A2	A3	--	--	1	---	2	---
CQ72-1-F205K-	600	2	1,3	A2	B4	A4	A3	1	---	2	---
CQ72-1-F405K-	600	4	1,3	B3	D2	B4	B3	1	---	2	---
CQ72-1-F605K-	600	6	1,3	B6	E4	C2	B6	1	---	2	---
CQ72-1-F805K-	600	8	1,3	C2	F1	C3	C2	1	---	2	---

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQ72 capacitors - Continued.

Part number 1/	DC voltage rating	Capacitance	Vibration grade	Case size Characteristic				Available terminal identification number Terminal			
				E	K	F	G	B	D	E	H
	Volts	µF									(E)
CQ72-1-F106K-	600	10	1,3	C4	J2	D3	C4	1	---	2	---
CQ72-1-F126K3	600	12	3	E2	J3	--	--	1	---	2	---
CQ72-1-F156K3	600	15	3	E5	J6	--	--	1	---	2	---
CQ72-1FG104K1	1,000	0.1	1	--	--	A1	--	1	---	2	---
CQ72-1-G254K-	1,000	0.25	1,3	--	A2	A2	--	1	---	2	---
CQ72-1-G504K-	1,000	0.5	1,3	A1	A3	A2	--	1	---	2	---
CQ72-1-G105K-	1,000	1.0	1,3	A2	B3	A3	A2	1	---	2	---
CQ72-1-G205K-	1,000	2	1,3	A5	C4	A6	A5	1	---	2	---
CQ72-1-G405K-	1,000	4	1,3	B6	F1	C2	B6	1	---	2	---
CQ72-1-G605K-	1,000	6	1,3	C4	G2	D3	C4	1	---	2	---
CQ72-1-G805K-	1,000	8	1,3	D2	J2	D5	D2	1	---	2	---
CQ72-1-G106K-	1,000	10	1,3	D5	J5	E5	D5	1	---	2	---
CQ72-1-G126K-	1,000	12	1,3	E4	J6	E6	E4	1	---	2	---
CQ72-1-G156K-	1,000	15	1,3	F1	J11	G2	F1	1	---	2	---
CQ72-1-H104K-	1,500	0.1	1,3	A1	A1	A2	--	1	---	2	---
CQ72-1-H254K-	1,500	0.25	1,3	A1	A2	A3	A2	1	---	2	---
CQ72-1-H504K-	1,500	0.5	1,3	A2	A5	A3	--	1	---	2	---
CQ72-1-H105K-	1,500	1.0	1,3	A5	B5	A6	A5	1	---	2	---
CQ72-1-H205K-	1,500	2	1,3	B6	D4	B6	B5	1	---	2	---
CQ72-1-H405K-	1,500	4	1,3	D5	G4	D4	C4	1	---	2	---
CQ72-1-H605K-	1,500	6	1,3	G1	J6	E5	D5	1	---	2	---
CQ72-1-H805K-	1,500	8	1,3	J2	J10	F2	F1	1	---	2	---
CQ72-1-H106K-	1,500	10	1,3	J4	--	G4	G2	1	---	2	---
CQ72-1-H126K-	1,500	12	1,3	J6	--	J3	G2	1	---	2	---
CQ72-1-H156K-	1,500	15	1,3	J10	--	J6	J3	1	---	2	---
CQ72-1FJ254K1	2,000	0.25	1	--	--	B1	--	---	---	3	---
CQ72-1FJ504K1	2,000	0.5	1	--	--	B2	--	---	---	3	---
CQ72E1-J105K-	2,000	1.0	1,3	--	C3	B6	B3	---	---	3	---
CQ72E1-J205K-	2,000	2	1,3	C4	E6	C4	C3	---	---	3	---
CQ72E1-J405K-	2,000	4	1,3	F1	J4	E6	E3	---	---	3	---
CQ72E1-J605K-	2,000	6	1,3	G3	J8	G4	G1	---	---	3	---
CQ72E1-J805K-	2,000	8	1,3	J2	--	J4	G3	---	---	3	---
CQ72E1-J106K-	2,000	10	1,3	J5	--	J7	J3	---	---	3	---
CQ72E1-J126K-	2,000	12	1,3	J6	--	J9	J5	---	---	3	---
CQ72E1-J156K-	2,000	15	1,3	J11	--	J10	J7	---	---	3	---
CQ72E1FK104K1	2,500	0.1	1	--	--	B1	--	---	---	3	---
CQ72E1-K254K1	2,500	0.25	1	--	--	B2	B1	---	---	3	---
CQ72E1-K504K-	2,500	0.5	1,3	--	B5	B4	B3	---	---	3	---
CQ72E1-K105K-	2,500	1.0	1,3	--	D2	D2	D1	---	---	3	---
CQ72E1-K205K-	2,500	2	1,3	C4	G4	E5	D5	---	---	3	---
CQ72E1-K405K-	2,500	4	1,3	E6	J8	J2	--	---	---	3	---
CQ72E1-K605K-	2,500	6	1,3	J2	--	J6	J4	---	---	3	---
CQ72E1-K805K-	2,500	8	1,3	J5	--	J8	J6	---	---	3	---
CQ72E1-K106K-	2,500	10	1,3	J7	--	J10	J8	---	---	3	---
CQ72E1-K126K-	2,500	12	1,3	J11	--	K3	J10	---	---	3	---
CQ72E1-L104K1	3,000	0.1	1	--	--	B2	B1	---	---	3	---
CQ72E1-L254K1	3,000	0.25	1	--	--	B3	B2	---	---	3	---
CQ72E1-L504K1	3,000	0.5	1	--	--	B6	B5	---	---	3	---
CQ72E1-L105K-	3,000	1.0	1,3	D1	E4	E4	E3	---	---	3	---
CQ72E1-L205K-	3,000	2	1,3	E3	J2	G2	G1	---	---	3	---
CQ72E1-L405K-	3,000	4	1,3	G4	J11	J7	J3	---	---	3	---
CQ72E1-L605K-	3,000	6	1,3	J5	--	K2	J9	---	---	3	---

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQ72 capacitors - Continued.

Part number 1/	DC voltage rating	Capacitance	Vibration grade	Case size				Available terminal identification number			
				Characteristic				Terminal			
				E	K	F	G	B	D	E	H
	Volts	µF									(E)
CQ72E1FM104K1	4,000	0.1	1	--	--	E1	--	---	---	4	---
CQ72E1-M254K-	4,000	0.25	1,3	--	C1	E3	E1	---	---	4	---
CQ72E1-M504K-	4,000	0.5	1,3	--	C4	E5	E3	---	---	4	---
CQ72E1-M105K-	4,000	1.0	1,3	C2	F2	G2	E6	---	---	4	---
CQ72E1-M205K-	4,000	2	1,3	E6	J7	J6	J4	---	---	4	---
CQ72E1-M405K-	4,000	4	1,3	J5	--	J11	J10	---	---	4	---
CQ72E1-N104K-	5,000	0.1	1,3	C1	--	E1	--	---	---	4	---
CQ72E1-N254K-	5,000	0.25	1,3	C1	--	E3	--	---	---	4	---
CQ72E1-N504K-	5,000	0.5	1,3	C1	E4	E6	E4	---	---	4	---
CQ72E1-N105K-	5,000	1.0	1,3	D2	G4	J4	J2	---	---	4	---
CQ72E1-N205K-	5,000	2	1,3	F2	J11	J11	J6	---	---	4	---
CQ72E1-N405K1	5,000	4	1	--	--	K4	K3	---	---	4	---
CQ72D1-P104K-	6,000	0.1	1,3	C1	--	E3	E2	---	4	---	---
CQ72D1-P254K-	6,000	0.25	1,3	C1	D2	E5	E4	---	4	---	---
CQ72D1-P504K-	6,000	0.5	1,3	C1	E6	J3	J2	---	4	---	---
CQ72D1-P105K-	6,000	1.0	1,3	E5	J6	J11	J9	---	4	---	---
CQ72D1-P205K-	6,000	2	1,3	G1	--	L1	K3	---	4	---	---
CQ72D1-R104K-	7,500	0.1	1,3	C1	C1	E5	E3	---	4	---	---
CQ72D1-R254K-	7,500	0.25	1,3	C2	G1	J2	J1	---	4	---	---
CQ72D1-R504K-	7,500	0.5	1,3	E4	J3	J6	J4	---	4	---	---
CQ72D1-R105K-	7,500	1.0	1,3	G3	--	K3	--	---	4	---	---
CQ72D1-R205K-	7,500	2	1,3	J10	--	L2	K4	---	4	---	---
CQ72D1-S104K-	10,000	0.1	1,3	C2	E2	--	--	---	4	---	---
CQ72D1-S254K-	10,000	0.25	1,3	E3	J3	--	--	---	4	---	---
CQ72-1-S504K-	10,000	0.5	1,3	F2	J9	K4	K3	---	4	---	5
CQ72-1-S105K-	10,000	1.0	1,3	J6	--	L2	K4	---	4	---	5
CQ72-1-S205K1	10,000	2.0	1	--	--	M1	L3	---	4	---	5
CQ72-1-T104K-	12,500	0.1	1,3	E2	J1	K1	--	---	4	---	5
CQ72-1-T254K-	12,500	0.25	1,3	E4	J5	K2	--	---	4	---	5
CQ72-1-T504K-	12,500	0.5	1,3	J4	--	L1	K4	---	4	---	5
CQ72-1-T105K-	12,500	1.0	1,3	J10	--	M1	L3	---	4	---	5
CQ72-1-T205K1	12,500	2.0	1	--	--	M2	M1	---	4	---	5

E

1/ Complete part number shall include additional symbols to indicate terminal, characteristic, and vibration grade, as applicable.

TABLE III. Case dimensions and retainer part number.

Case size 1/	Case dimensions (in inches)				Retainer part number 2/
	W ±.062	T ±.062	L ±.062	A +.0625 -.187	
A1	1.812	1.062	1.625	0.812	CQ072-A1
A2	1.812	1.062	2.250	0.812	CQ072-A2
A3	1.812	1.062	2.875	0.812	CQ072-A3
A4	1.812	1.062	3.250	0.812	CQ072-A4
A5	1.812	1.062	3.875	0.812	CQ072-A5
A6	1.812	1.062	4.750	0.812	CQ072-A6
B1	2.500	1.188	2.500	1.125	CQ072-B1
B2	2.500	1.188	2.875	1.125	CQ072-B2
B3	2.500	1.188	3.500	1.125	CQ072-B3
B4	2.500	1.188	3.875	1.125	CQ072-B4

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

TABLE III. Case dimensions and retainer part number - Continued.

Case size 1/	Case dimensions (in inches)				Retainer part number 2/
	W ±.062	T ±.062	L ±.062	A +.0625 -.187	
B5	2.500	1.188	4.250	1.125	CQ072-B5
B6	2.500	1.188	4.750	1.125	CQ072-B6
C1	3.750	1.250	3.250	2.000	CQ072-C1
C2	3.750	1.250	3.875	2.000	CQ072-C2
C3	3.750	1.250	4.250	2.000	CQ072-C3
C4	3.750	1.250	4.750	2.000	CQ072-C4
D1	3.750	1.750	3.250	2.000	CQ072-D1
D2	3.750	1.750	3.875	2.000	CQ072-D2
D3	3.750	1.750	4.000	2.000	CQ072-D3
D4	3.750	1.750	4.250	2.000	CQ072-D4
D5	3.750	1.750	4.750	2.000	CQ072-D5
E1	3.750	2.250	2.750	2.000	CQ072-E1
E2	3.750	2.250	3.375	2.000	CQ072-E2
E3	3.750	2.250	3.875	2.000	CQ072-E3
E4	3.750	2.250	4.500	2.000	CQ072-E4
E5	3.750	2.250	4.750	2.000	CQ072-E5
E6	3.750	2.250	5.125	2.000	CQ072-E6
F1	3.750	2.500	4.750	2.000	CQ072-F1
F2	3.750	2.500	5.750	2.000	CQ072-F2
G1	3.750	3.188	4.500	2.000	CQ072-G1
G2	3.750	3.188	4.750	2.000	CQ072-G2
G3	3.750	3.188	5.125	2.000	CQ072-G3
G4	3.750	3.188	5.500	2.000	CQ072-G4
J1	4.562	3.750	3.875	2.000	CQ072-J1
J2	4.562	3.750	4.375	2.000	CQ072-J2
J3	4.562	3.750	4.750	2.000	CQ072-J3
J4	4.562	3.750	5.125	2.000	CQ072-J4
J5	4.562	3.750	5.500	2.000	CQ072-J5
J6	4.562	3.750	6.000	2.000	CQ072-J6
J7	4.562	3.750	6.500	2.000	CQ072-J7
J8	4.562	3.750	7.000	2.000	CQ072-J8
J9	4.562	3.750	7.500	2.000	CQ072-J9
J10	4.562	3.750	8.500	2.000	CQ072-J10
J11	4.562	3.750	9.625	2.000	CQ072-J11
K1	8.000	4.000	5.500	4.500	CQ072-K1
K2	8.000	4.000	7.000	4.500	CQ072-K2
K3	8.000	4.000	9.250	4.500	CQ072-K3
K4	8.000	4.000	11.000	4.500	CQ072-K4
L1	13.500	4.125	7.000	6.750	CQ072-L1
L2	13.500	4.125	9.250	6.750	CQ072-L2
L3	13.500	4.125	13.125	6.750	CQ072-L3
M1	13.500	5.125	12.875	6.750	CQ072-M1
M2	13.500	5.125	13.750	6.750	CQ072-M2

1/ For case size J, the retainers are attached to the sides of the case which are parallel to the centerline of the terminals.

2/ Complete retainer part number will include the symbol "F" for footed or "S" for the spaded design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

TABLE IV. CQ072 retainer dimensions.

Retainer part number 1/	D ±.031 Footed retainer	D ±.031 Spade-lug retainer	E max	G max	H ±.016 2/	J	L Footed retainer	L Spade-lug retainer	M ±.016	T ±.062	Case size
CQ072-A1	2.250	2.062	2.719	.625	NOT APPLICABLE SINGLE STUD OR MOUNTING HOLE	.187	1.125	1.375	.391	2.375	A1
CQ072-A2	2.250	2.062	2.719	.625		.187	2.125	2.000	.391	3.000	A2
CQ072-A3	2.250	2.062	2.719	.625		.187	2.750	2.625	.391	3.625	A3
CQ072-A4	2.250	2.062	3.062	.906		.187	3.125	3.000	.391	4.000	A4
CQ072-A5	2.250	2.062	2.719	.625		.187	3.750	3.625	.391	4.625	A5
CQ072-A6	2.250	2.062	2.719	.625		.187	4.625	4.500	.391	5.500	A6
CQ072-B1	3.000	2.750	3.812	.906		.187	2.375	2.250	.391	3.250	B1
CQ072-B2	3.000	2.750	3.938	.625		.187	2.750	2.625	.391	3.625	B2
CQ072-B3	3.000	2.750	3.938	.625		.187	3.375	3.250	.391	4.250	B3
CQ072-B4	3.000	2.750	3.938	.625		.187	3.750	3.625	.391	4.625	B4
CQ072-B5	3.000	2.750	3.938	.625		.187	4.125	4.000	.391	5.000	B5
CQ072-B6	3.000	2.750	3.938	.625		.187	4.625	4.500	.391	5.500	B6
CQ072-C1	4.375	4.000	4.844	.625		.187	3.125	3.000	.391	4.000	C1
CQ072-C2	4.375	4.000	4.844	.625		.187	3.750	3.625	.391	4.625	C2
CQ072-C3	4.375	4.000	4.844	.625		.187	4.125	4.000	.391	5.000	C3
CQ072-C4	4.375	4.000	4.844	.625		.187	4.625	4.500	.391	5.500	C4
CQ072-D1	4.375	4.000	4.969	1.375	.625	.213	3.125	3.000	.844	4.000	D1
CQ072-D2	4.375	4.000	4.969	1.375	.625	.213	3.750	3.625	.844	4.625	D2
CQ072-D3	4.375	4.000	5.000	1.469	.625	.213	3.875	3.750	.844	4.750	D3
CQ072-D4	4.375	4.000	4.969	1.375	.625	.213	4.125	4.000	.844	5.000	D4
CQ072-D5	4.375	4.000	4.969	1.375	.625	.213	4.625	4.500	.844	5.500	D5
CQ072-E1	4.375	4.000	5.250	1.967	1.250	.213	2.625	2.500	1.344	3.500	E1
CQ072-E2	4.375	4.000	4.969	1.875	1.250	.213	3.250	3.125	1.344	4.125	E2
CQ072-E3	4.375	4.000	4.969	1.875	1.250	.213	3.750	3.625	1.344	4.625	E3
CQ072-E4	4.375	4.000	4.969	1.875	1.250	.213	4.375	4.250	1.344	5.250	E4
CQ072-E5	4.375	4.000	4.969	1.875	1.250	.213	4.625	4.500	1.344	5.500	E5
CQ072-E6	4.375	4.000	4.969	1.875	1.250	.213	5.000	4.875	1.344	5.875	E6
CQ072-F1	4.375	4.000	4.969	1.875	1.250	.213	4.625	4.500	1.344	5.500	F1
CQ072-F2	4.375	4.000	4.969	1.875	1.250	.213	5.625	5.500	1.344	6.500	F2
CQ072-G1	4.375	4.000	4.969	2.812	1.938	.213	4.375	4.250	2.281	5.250	G1
CQ072-G2	4.375	4.000	4.969	2.812	1.938	.213	4.625	4.500	2.281	5.500	G2
CQ072-G3	4.375	4.000	4.969	2.812	1.938	.213	5.000	4.875	2.281	5.875	G3
CQ072-G4	4.375	4.000	4.969	2.812	1.938	.213	5.375	5.250	2.281	6.250	G4
CQ072-J1	4.375	4.000	4.969	4.000	3.375	.281	3.750	3.625	3.656	4.625	J1
CQ072-J2	4.375	4.000	4.969	4.000	3.375	.281	4.250	4.125	3.656	5.125	J2
CQ072-J3	4.375	4.000	4.969	4.000	3.375	.281	4.625	4.500	3.656	5.500	J3
CQ072-J4	4.375	4.000	4.969	4.000	3.375	.281	5.000	4.875	3.656	5.875	J4
CQ072-J5	4.375	4.000	4.969	4.000	3.375	.281	5.375	5.250	3.656	6.250	J5
CQ072-J6	4.375	4.000	4.969	4.000	3.375	.281	5.875	5.750	3.656	6.750	J6
CQ072-J7	4.500	4.000	5.094	4.000	3.375	.281	6.375	6.250	3.656	7.250	J7
CQ072-J8	4.500	4.000	5.094	4.000	3.375	.281	6.875	6.750	3.656	7.750	J8
CQ072-J9	4.500	4.000	5.094	4.000	3.375	.281	7.375	7.250	3.656	8.250	J9
CQ072-J10	4.500	4.000	5.094	4.000	3.375	.281	8.375	8.250	3.656	9.250	J10
CQ072-J11	4.500	4.000	5.094	4.000	3.375	.281	9.500	9.375	3.656	10.375	J11
CQ072-K1	10.125		11.250	4.375	2.125	.438	5.250		3.656		K1
CQ072-K2	10.125		11.250	4.375	2.125	.438	6.750		3.656		K2
CQ072-K3	10.125		11.250	4.375	2.125	.438	9.000		3.656		K3
CQ072-K4	10.125		11.250	4.375	2.125	.438	10.750		3.656		K4
CQ072-L1	15.625		16.750	4.500	2.125	.438	6.750		3.656		L1
CQ072-L2	15.625		16.750	4.500	2.125	.438	9.000		3.656		L2
CQ072-L3	15.625		16.750	4.500	2.125	.438	12.875		3.656		L3
CQ072-M1	15.625		16.750	5.500	3.125	.438	12.625		3.656		M1
CQ072-M2	15.625		16.750	5.500	3.125	.438	13.500		3.656		M2

Not available (Spade-lug retainer)


Not available (M, T)

1/ Complete retainer part number shall include additional symbol to indicate design of retainer ("S" spaded, "F" footed).


2/ Single hole or spade bolt located within .016 of center of retainer.

FIGURE 2. CQ 072 retainers - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

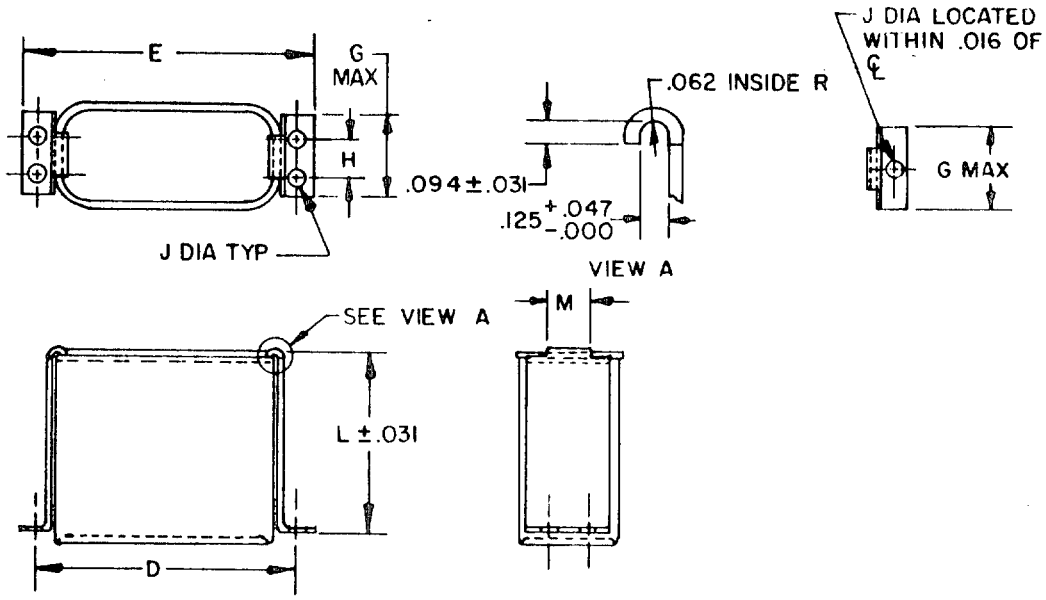

CQ 072 FOOTED RETAINERS
(For use with style CQ 72 case sizes A1 through M2)

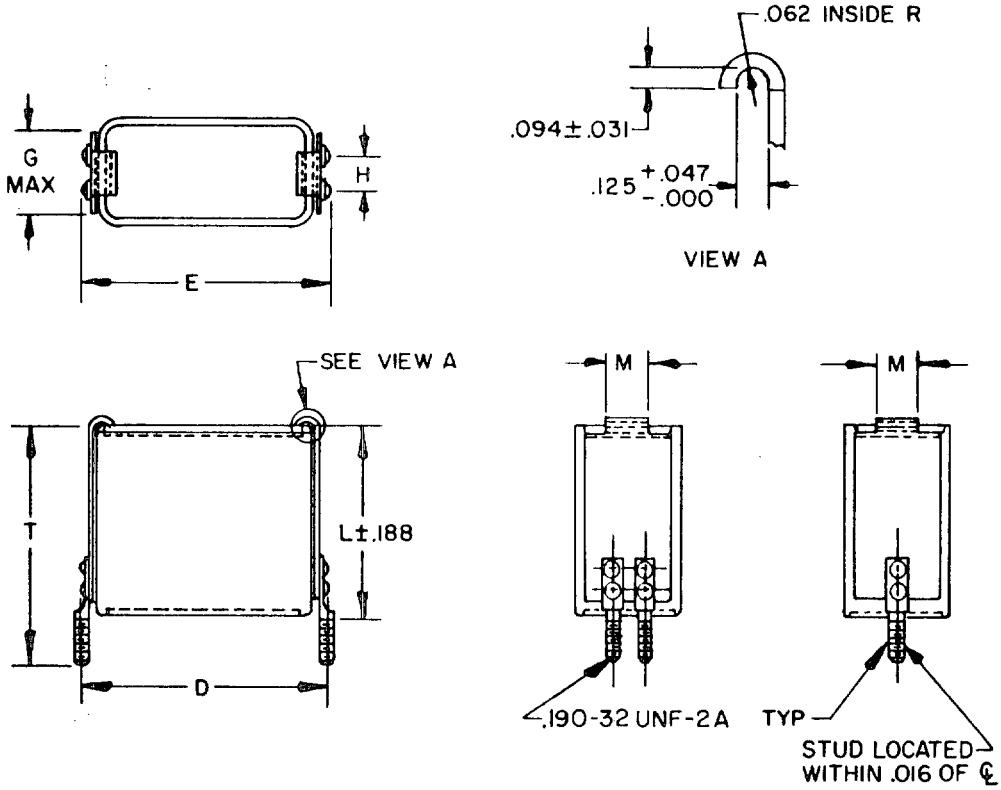

CQ 072 SPADE - LUG RETAINERS
(For use with style CQ 72 case sizes A1 through M2)

FIGURE 2. CQ 072 retainers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

TABLE V. Millimeter equivalent of decimal inches.

INCHES	MM	INCHES	MM	INCHES	MM
.015	.38	2.281	57.94	5.500	139.70
.016	.41	2.375	60.33	5.750	146.05
.025	.51	2.500	63.50	5.875	149.23
.031	.79	2.625	66.68	6.000	152.40
.045	1.14	2.719	69.06	6.250	158.75
.047	1.19	2.750	69.85	6.375	161.93
.062	1.57	2.875	73.03	6.500	165.10
.0625	1.59	3.000	76.20	6.750	171.45
.094	2.39	3.062	77.77	6.875	174.63
.125	3.18	3.125	79.38	7.000	177.80
.187	4.75	3.188	80.98	7.250	184.15
.188	4.78	3.250	82.55	7.375	187.33
.213	5.41	3.375	85.73	7.500	190.50
.281	7.14	3.500	88.90	7.750	196.85
.391	9.93	3.625	92.08	8.000	203.20
.438	11.13	3.656	92.86	8.250	209.55
.625	15.88	3.750	95.25	8.375	212.73
.812	20.62	3.812	96.82	8.500	215.90
.844	21.44	3.875	98.43	9.000	228.60
.906	23.01	3.938	99.03	9.250	234.95
1.062	26.97	4.000	101.60	9.375	238.13
1.125	28.58	4.125	104.78	9.500	241.30
1.188	30.18	4.250	107.95	9.625	244.48
1.250	31.75	4.375	111.13	10.125	257.18
1.344	33.14	4.500	114.30	10.375	263.53
1.375	34.93	4.562	115.87	10.750	273.05
1.469	37.31	4.625	117.48	11.000	279.40
1.625	41.28	4.750	120.65	11.250	285.75
1.750	44.45	4.844	123.04	12.625	320.68
1.812	46.02	4.875	123.83	12.875	327.03
1.938	49.13	4.969	126.21	13.125	333.38
1.967	49.96	5.000	127.00	13.500	342.90
2.000	50.80	5.094	129.39	13.750	349.25
2.062	52.37	5.125	130.18	15.625	396.88
2.125	53.98	5.250	133.35	16.750	425.45
2.250	57.15	5.375	136.53		

NOTES:
1. Dimensions are in inches.
2. Shape of retainer optional provided specified dimensions are met. Spade lugs shall be rigid and double welded, double riveted, single riveted and soldered, or welded and single riveted to the retainer.
3. Minimum thickness of retainers shall be .045 (1.14 mm).
4. When two part numbers are applicable to the same retainer, both part numbers shall be marked on the retainer. Retainers shall be marked on the outer surface.
5. When used, rivets shall curl-over .020 (.51 mm) ±.015 (.38 mm) beyond the inside of the retainer.

FIGURE 2. CQ 072 retainers - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

NOTE: Style CQ72 capacitors are substitutable for styles CP70 and CP72 capacitors formerly covered in MIL-C-25/7E as shown in the following:

FROM	TO	FROM	TO
MIL-C-25/7E (CP70 and CP72)	MIL-C-19978/3E (CQ72)	MIL-C-25/7E (CP70 and CP72)	MIL-C-19978/3E (CQ72)
CP7--1EF254K1	CQ72-1FF254K1	CP7-E1-K205K1	CQ72E1-K205K-
CP7--1EF105K1	CQ72-1-F105K-	CP7-E1EK405K1	CQ72E1-K405K-
CP7--1-F205K1	CQ72-1-F205K-	CP7-E1-K605K1	CQ72E1-K605K-
CP7--1-F405K1	CQ72-1-F405K-	CP7-E1-K805K1	CQ72E1-K805K-
CP7--1-F605K1	CQ72-1-F605K-	CP7-E1-K106K1	CQ72E1-K106K-
CP7--1-F805K1	CQ72-1-F805K-	CP70E1-K126K1	CQ72E1-K126K-
CP7--1-F106K1	CQ72-1-F106K-	CP7-E1-L104K1	CQ72E1-L104K1
CP7--1EG104K1	CQ72-1FG104K1	CP7-E1-L254K1	CQ72E1-L254K1
CP7--1EG254K1	CQ72-1-G254K-	CP7-E1-L504K1	CQ72E1-L504K1
CP7--1EG504K1	CQ72-1-G504K-	CP7-E1-L105K1	CQ72E1-L105K-
CP7--1-G105K1	CQ72-1-G105K-	CP7-E1-L205K1	CQ72E1-L205K-
CP7--1-G205K1	CQ72-1-G205K-	CP7-E1-L405K1	CQ72E1-L405K-
CP7--1-G405K1	CQ72-1-G405K-	CP7-E1-L605K1	CQ72E1-L605K-
CP7--1-G605K1	CQ72-1-G605K-	CP7-E1EM104K1	CQ72E1FM104K1
CP7--1-G805K1	CQ72-1-G805K-	CP7-E1-M254K1	CQ72E1-M254K-
CP7--1-G106K1	CQ72-1-G106K-	CP7-E1-M504K1	CQ72E1-M504K-
CP7--1-G126K1	CQ72-1-G126K-	CP7-E1-M105K1	CQ72E1-M105K-
CP7--1-G156K1	CQ72-1-G156K-	CP7-E1-M205K1	CQ72E1-M205K-
CP7--1EH104K1	CQ72-1-H104K-	CP7-E1-M405K1	CQ72E1-M405K-
CP7--1-H254K1	CQ72-1-H254K-	CP7-E1EN104K1	CQ72E1-N104K-
CP7--1EH504K1	CQ72-1-H504K-	CP7-E1EN254K1	CQ72E1-N254K-
CP7--1-H105K1	CQ72-1-H105K-	CP7-E1-N504K1	CQ72E1-N504K-
CP7--1-H205K1	CQ72-1-H205K-	CP7-E1-N105K1	CQ72E1-N105K-
CP7--1-H405K1	CQ72-1-H405K-	CP7-E1-N205K1	CQ72E1-N205K-
CP7--1-H605K1	CQ72-1-H605K-	CP70E1-N405K1	CQ72E1-N405K1
CP7--1-H805K1	CQ72-1-H805K-	CP7-D1-P104K1	CQ72D1-P104K-
CP7--1-H106K1	CQ72-1-H106K-	CP7-D1-P254K1	CQ72D1-P254K-
CP7--1-H126K1	CQ72-1-H126K-	CP7-D1-P504K1	CQ72D1-P504K-
CP7--1-H156K1	CQ72-1-H156K-	CP7-D1-P105K1	CQ72D1-P105K-
CP7-E1EJ254K1	CQ72-1FJ254K1	CP70D1-P205K1	CQ72D1-P205K-
CP7-E1EJ504K1	CQ72-1FJ504K1	CP7-D1-R104K1	CQ72D1-R104K-
CP7-E1-J105K1	CQ72E1-J105K-	CP7-D1-R254K1	CQ72D1-R254K-
CP7-E1-J205K1	CQ72E1-J205K-	CP7-D1-R504K1	CQ72D1-R504K-
CP7-E1-J405J1	CQ72E1-J405K-	CP70D1ER105K1	CQ72-1-R105K-
CP7-E1-J605K1	CQ72E1-J605K-	CP70D1-R205K1	CQ72-1-R205K-
CP7-E1-J805K1	CQ72E1-J805K-	CP70D1-S504K1	CQ72-1-S504K-
CP7-E1-J106K1	CQ72E1-J106K-	CP70D1-S105K1	CQ72-1-S105K-
CP7-E1-J126K1	CQ72E1-J126K-	CP70D1-S205K1	CQ72-1-S205K1
CP7-E1-J156K1	CQ72E1-J156K-	CP70D1ET104K1	CQ72-1-T104K-
CP7-E1EK104K1	CQ72E1FK104K1	CP70D1ET254K1	CQ72-1-T254K-
CP7-E1-K254K1	CQ72E1-K254K1	CP70D1-T504K1	CQ72-1-T504K-
CP7-E1-K504K1	CQ72E1-K504K-	CP70D1-T105K1	CQ72-1-T105K-
CP7-E1-K105K1	CQ72E1-K105K-	CP70D1-T205K1	CQ72-1-T205K1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI, MU
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS, OS, SH
Air Force -

Preparing activity:
Air Force - 85

(Project 5910-1223-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:02Z
Check the source to verify that this is the current version before use.