The documentation and process conversion measures necessary to comply with this revision shall be completed by 4 January 1999

INCH-POUND
MIL-PRF-19500/407C
15 September 1998
SUPERSEDING
MIL-S-19500/407B
1 September 1994

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, POWER
TYPE 2N3055 JAN, JANTX AND JANTXV

This Specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for NPN, silicon, power, transistor. Four levels of product assurance is provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1.

1.3 Maximum ratings.

Type	P_T		V_{CBO}	V_{CBO}	V_{CBO}	I_C	I_B	T_{STG} and T_{OP}	$R_{\theta JC}$
	T_A = +25°C 1/ 2/	T_C = +25°C 3/							
	W	W	V dc	V dc	V dc	A dc	A dc	°C	°C/W
2N3055	6	117	100	70	7	15	7	-65°C to +200°C	1.5

1/ T_A = Room ambient as defined in the general requirements of (see 4.5) of MIL-STD-750.
2/ Derate linearly 34.2 mW/°C for T_A > +250°C.
3/ Derate linearly 668 mW/°C for T_C > +250°C.

1.4 Primary electrical characteristics.

	h_{FE} I_C = 4 A dc V_{CE} = 4 V dc 1/	C_{obo} I_E = 0, V_{CB} = 10 V dc 100 kHz ≤ f ≤ 1 MHz	$\|h_{fe}\|$ I_C = 1 A dc V_{CE} = 4 V dc f = 100 kHz	$V_{CE(sat)}$ I_C = 4 A dc I_B = 0.4 A dc 1/	Pulse response	
					t_{on}	t_{off}
		pF		V dc	µs	µs
Min	20		8			
Max	60	700	40	0.75	6	12

1/ Pulsed (see 4.5.1).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated detail specification. The individual item requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 herein.

3.3.1 Lead finish. Lead finish shall be solderable in accordance with MIL-STD-750, MIL-PRF-19500, and as specified herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

a. Qualification inspection (see 4.2).


b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.038	0.97	.135	3.43	.440	11.18
.043	1.09	.151	3.84	.495	12.57
.048	1.22	.188	4.78	.500	12.70
.050	1.27	.205	5.21	.525	13.34
.053	1.35	.225	5.72	.875	22.22
.058	1.47	.250	6.35	1.177	29.90
.060	1.52	.312	7.92	1.197	30.40
.063	1.60	.360	9.14	1.51	38.4
.131	3.33	.420	10.67	1.65	41.9

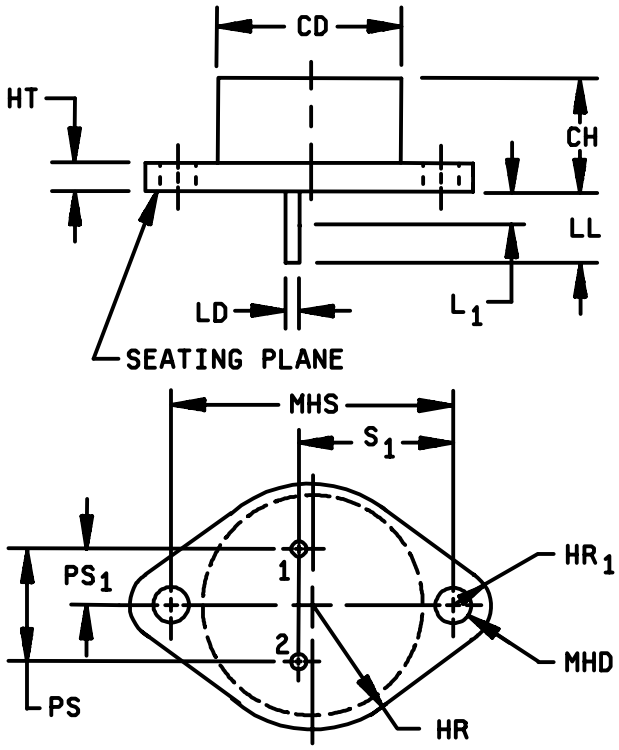

NOTES: (for table on next page)

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. These dimensions should be measured at points 0.050 inch (1.27 mm) +0.005 inch (0.13 mm) -0.000 inch (0.00 mm) below seating plane. When gauge is not used, measurement will be made at the seating plane.
4. Two places.
5. The seating plane of the header shall be flat within 0.001 inch (0.03 mm) concave to 0.004 inch (0.10 mm) convex inside a 0.930 inch (23.62 mm) diameter circle on the center of the header and flat within 0.001 inch (0.03 mm) concave to 0.006 inch (0.15 mm) convex overall.
6. Lead diameter shall not exceed twice LD within L_1.
7. Lead designation, depending on device type, shall be as follows:

Lead number	Bipolar transistor	FET
1	Emitter	Source
2	Base	Gate
Case	Collector	Drain

FIGURE 1. Physical dimensions of T-4 family. (Similar to TO-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

Symbol	T-4A		T-4B		T-4C		Note
	Min	Max	Min	Max	Min	Max	
CD		0.875		0.875		0.875	3
CH	0.250	0.450	0.250	0.450	0.250	0.450	
HR	0.495	0.525	0.495	0.525	0.495	0.525	
HR_1	0.131	0.188	0.131	0.188	0.131	0.188	6
HT	0.060	0.135	0.060	0.135	0.060	0.135	
LD	0.038	0.043	0.038	0.043	0.038	0.043	5, 9
LL	0.312	0.500	0.312	0.500	0.312	0.500	12, 13
L_1		0.050		0.050		0.050	11
MHD	0.151	0.161	0.151	0.161	0.151	0.161	7
MHS	1.177	1.197	1.177	1.197	1.177	1.197	
PS	0.420	0.440	0.420	0.440	0.420	0.440	4, 10
PS_1	0.205	0.225	0.205	0.225	0.205	0.225	4, 5, 10
S_1	0.655	0.675	0.655	0.675	0.655	0.675	4
Notes	1, 2, 5, 7		1, 2, 5, 7		1, 2, 5, 7		

FIGURE 4. Physical dimensions of T-4 family (Similar to TO-3) - Continued.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Measured in the zone beyond 0.250 inch (6.35 mm) from the seating plane.
4. Measured in the zone 0.050 inch (1.27 mm) and 0.250 inch (6.35 mm) from the seating plane.
5. Variations on dimension CD in this zone shall not exceed .010 inch (0.25 mm).
6. Outline in this zone is not controlled.
7. When measured in gauging plane 0.054 +0.001, -0.0000 inch (1.37 +0.03, -0.00 mm) below the seating plane of the transistor, maximum diameter leads shall be within 0.007 inch (0.18 mm) of their true location relative to a maximum width tab. Smaller diameter leads shall fall within the outline of the maximum diameter lead tolerance. Figure 2 shows the preferred method of measurement.
8. The collector shall be electrically connected to the case.
9. Measured from the maximum diameter of the actual device.
10. All 2 leads (see 3.3.1 and 3.3.2).
11. Diameter of leads in this zone is not controlled.
12. For transistor types 2N5415 and 2N5416, dimension L shall be 1.500 inches (38.10 mm) minimum and 1.75 inches (44.4 mm) maximum.
13. For transistor types 2N5415S and 2N5416S, dimension L shall be 0.5 inch (13 mm) minimum and 0.75 inch (19.0 mm) maximum.

FIGURE 1. Physical dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANTX and JANTXV levels only). Screening shall be in accordance with MIL-PRF-19500 (table IV), and as specified herein. The following measurement shall be made in accordance with table I herein. Devices that exceed the limits of tables I and II herein shall not be acceptable.

Screening (see table IV) of MIL-PRF-19500	Measurements
	JANTX and JANTXV levels
9	Not applicable
11	I_{CEX1} and h_{FE2}
12	See 4.3.1
13	ΔI_{CEX1} = 100 percent of initial value or 100 μA dc whichever is greater; Δh_{FE2} = ±25 percent of initial value; subgroup 2 of table I

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows:

T_J = 187.5°C ±12.5°C; V_{CB} = 40 V dc.

NOTE: No heatsink or forced air cooling on the devices shall be permitted.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 and table I herein. End-point electrical measurements shall be in accordance with the applicable steps of table II herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IVb (JANTX and JANTXV) of MIL-PRF-19500 and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table II herein.

4.4.2.1 Group B inspection, table IVb of MIL-PRF-19500.

a. Subgroup 3: Steady-state operation life; method 1027; T_J = 187.5°C ±12.5°C; $V_{CE} \geq$ 24 V dc.

b Subgroup 5: Thermal resistance; method 3131; see 4.5.2.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table V of MIL-PRF-19500 and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table II herein.

4.4.3.1 Group C inspection, table V of MIL-PRF-19500.

a. Subgroup 2: Terminal strength (tension); method 2036; test condition A; weight = 10 lbs; t = 15s.

b. Subgroup 6: Steady-state operation life; method 1026; T_J = 187.5°C ±12.5°C; $V_{CB} \geq$ 24 V dc.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

4.5.2 Thermal resistance. Thermal resistance measurements shall be performed in accordance with MIL-STD-750. The maximum limit of $R_{\theta JC(max)}$ shall be 1.5°C/W. The following test conditions shall apply:

a. I_M: Measurement current ..... 10 mA.

b. V_{CE}: Measurements current (same as V_H) ..... 30 V.

c. I_H: Collector heating current ..... 0.33 A.

d. V_H: Collector-emitter heating voltage ..... 30 V.

e. t_H: Heating time ..... Steady-state (see MIL-STD-750, method 3131 for definition).

f. t_{MD}: Measurement delay time ..... 15 µs.

g. t_{SW}: Sampling window time ..... 10 µs maximum.

4.5.3 Coil selection for safe operating area (SOA) tests. In selecting coils for use in the clamped and unclamped inductive SOA tests, prime consideration should be given to the recommended commercially available coil. However, due to the extreme critical nature of the coil in these circuits and the wide tolerance of some commercially available coils (+100 percent, -50 percent), it shall be the semiconductor manufacturer's responsibility to prove upon request, compliance or equivalency of any coil used (commercial or in plant designed) to be within (+20 percent, -10 percent) of the specified inductance at the rated current and dc resistance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Breakdown voltage collector to emitter	3011	Bias condition D; I_C = 200 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$	70		V dc
Breakdown voltage collector to emitter	3011	Bias condition B; I_C = 200 mA dc; pulsed (see 4.5.1) R_{BE} = 100 ohms	$V_{(BR)CER}$	80		V dc
Breakdown voltage collector to emitter	3011	Bias condition D; I_C = 200 mA dc; pulsed (see 4.5.1) V_{BE} = -1.5 V dc	$V_{(BR)CEX}$	90		V dc
Collector to emitter cutoff current	3041	Bias condition D; V_{CE} = 60 V dc	I_{CEO}		1	mA dc
Collector to emitter cutoff current	3041	Bias condition A; V_{BE} = -1.5 V dc V_{CE} = 100 V dc	I_{CEX1}		1	mA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 7 V dc	I_{EBO}		1	mA dc
Forward-current transfer ratio	3076	V_{CE} = 4 V dc I_C = 0.5 A dc	h_{FE1}	40		
Forward-current transfer ratio	3076	V_{CE} = 4 V dc I_C = 4 A dc Pulsed (see 4.5.1)	h_{FE2}	20	60	
Forward-current transfer ratio	3076	V_{CE} = 4 V dc I_C = 10 A dc Pulsed (see 4.5.1)	h_{FE3}	5		
Collector to emitter voltage (saturated)	3071	I_C = 4 A dc I_B = 0.4 A dc Pulsed (see 4.5.1)	$V_{CE(sat)1}$		0.75	V dc
Base emitter voltage (saturated)	3066	Test condition B V_{CE} = 4 V dc I_C = 4 A dc Pulsed (see 4.5.1)	V_{BE}		1.4	V dc
Collector to emitter voltage (saturated)	3071	I_C = 10 A dc I_B = 3.3 A dc Pulsed (see 4.5.1)	$V_{CE(sat)2}$		2	V dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3						
High Temperature operation:		T_A = +150°C				
Collector to emitter cutoff current	3041	Bias condition A; V_{CE} = 100 V dc V_{BE} = -1.5 V dc	I_{CEX2}		10	mA dc
Low temperature operation:		T_A = -65°C				
Forward-current transfer ratio	3076	V_{CE} = 4 V dc I_C = 4 A dc Pulsed (see 4.5.1)	h_{FE4}	15		
Subgroup 4						
Magnitude of common emitter small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 4 V dc I_C = 4 A dc f = 100 kHz	$\lvert h_{fe} \rvert$	8	40	
Open circuit output capacitance	3236	V_{CB} = 10 V dc, I_C = 0 100 kHz ≤ f ≤ 1 MHz	C_{obo}		700	pF
Subgroup 5						
Pulse response	3251	Test condition A				
Turn-on time		V_{CC} = 30 V dc I_C = 4 A dc I_{B1} = 0.4 A dc See figure 2	t_{on}		6	µs
Turn-off time		V_{CC} = 30 V dc I_C = 4 A dc I_{B1} = -I_{B2} = 0.4 A dc See figure 2	t_{off}		12	µs
Subgroup 6						
Safe operating area (continuous dc)	3051	T_C = +25°C; 1 cycle t = 1 s; (see figure 3)				
Test 1		V_{CE} = 7.8 V dc I_C = 15 A dc				
Test 2		V_{CE} = 70 V dc I_C = 1.67 A dc				
Electrical measurements		See table II, steps 1, 2 and 3				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 6 - Continued						
Safe operating area (switching)	3053	Load condition C; (unclamped inductive load) (see figure 4) T_A = +25°C; duty cycle ≤ 10 percent, R ≤ 0.1 ohms				
Test 1		t_p = 5 ms (vary to obtain I_C); R_{BB1} = 2 ohms; V_{BB1} ≥ 10 V dc; R_{BB2} = 100 ohms; V_{CC} ≥ 10 V dc; V_{BB2} = 1.5 V dc; I_C = 15 A dc; the coil used shall provide a minimum inductance of 2 mH at 15 A dc with a maximum dc resistance of 0.1 ohms (for reference only: Signal Transformer Co. CH-50, or equivalent) (see 4.5.3)				
Test 2		t_p = 20 ms (vary to obtain I_C); R_{BB1} = 30 ohms; V_{BB1} ≥ 10 V dc; R_{BB2} = 100 ohms; V_{CC} ≥ 10 V dc; V_{BB2} = 1.5 V dc; I_C = 3.8 A dc; the coil used shall provide a minimum inductance of 40 mH at 3.8 A dc with a maximum dc resistance of 0.5 ohms (for reference only: Signal Transformer Co. CH-8, or equivalent) (see 4.5.3)				
Electrical measurements		See table II, steps 1, 2, and 3				
Subgroup 7						
Safe operating area (switching)	3053	T_A = +25°C; duty cycle ≤ 10 percent, t_p = 10ms (vary to obtain I_C); R_S ≤ 0.1 ohms; V_{CC} ≥ 10 V dc; I_C = 15 A dc; clamp voltages = 90 V dc (see figure 5)				
Electrical measurements		See table II, steps 1, 2 and 3				

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

TABLE II. Groups A, B, and C electrical measurements. 1/ 2/

Step	Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Collector to emitter cutoff current	3041	Bias condition A V_{BE} = -1.5 V dc V_{CE} = 100 V dc	I_{CEX1}		1	mA dc
2.	Emitter to base cutoff current	3061	Bias condition D V_{EB} = 7 V dc	I_{EBO}		1	mA dc
3.	Forward-current transfer ratio		V_{CE} = 4 V dc I_C = 4 A dc Pulsed (see 4.5.1)	h_{FE2}	20	60	
4.	Collector to emitter cutoff current	3041	Bias condition A V_{BE} = -1.5 V dc V_{CE} = 100 V dc	ΔI_{CEX1}	±100 percent of initial value or 100 μA dc, which ever is greater		
5.	Forward-current transfer ratio	3076	V_{CE} = 4 V dc I_C = 4 A dc Pulsed (see 4.5.1)	Δh_{FE2}	±25% change in initial recorded value		

1/ The electrical measurements for table IVb (JANTX and JANTXV) of MIL-PRF-19500 are as follows:

a. Subgroup 2, see table III herein, steps 1, 2, and 3.

b. Subgroup 3, see table III herein, steps 1, 2, 3, 4, and 5.

c. Subgroup 6, see table III herein, steps 1, 2, 3, 4, and 5.


2/ The electrical measurements for table V of MIL-PRF-19500 are as follows:

a. Subgroup 2, see table III herein, steps 1, 2, and 3.

b. Subgroup 3, see table III herein, steps 1, 2, and 3.

c. Subgroup 6, see table III herein, steps 1, 2, 3, 4, and 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

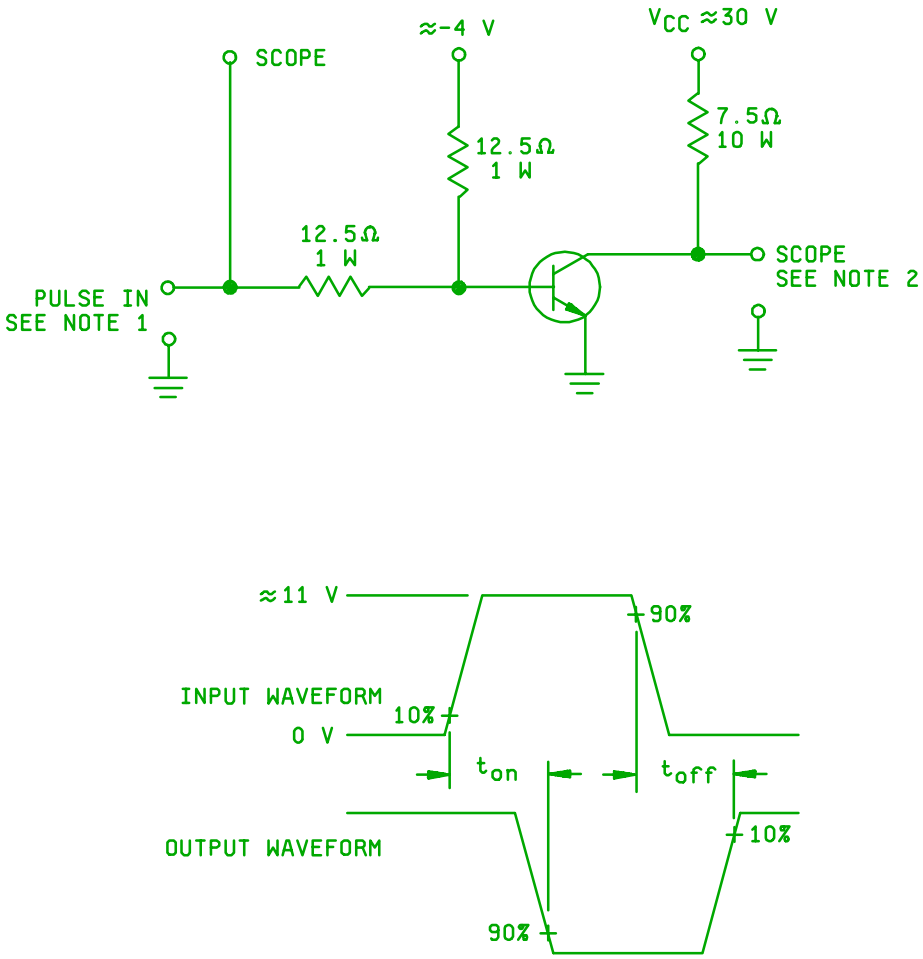

NOTES:

1. The rise time (t_r) and fall time (t_f) of applied pulse shall be each ≤ 20 ns; duty cycle ≤ 2 percent; generator source impedance shall be 50Ω; pulse width = 20 μs.
2. Output sampling oscilloscope: Z_{in} ≥ 100 kΩ; C_{in} ≤ 50 pF; rise time ≤ 2 ns.

FIGURE 2. Pulse response test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

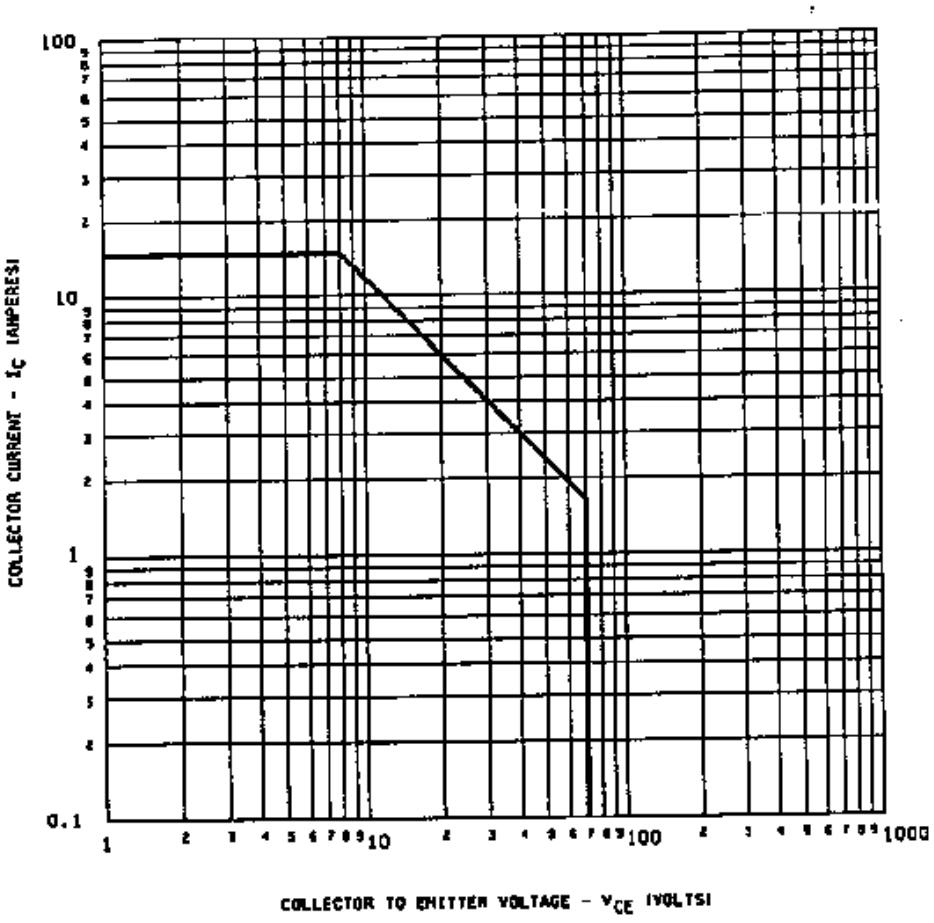


FIGURE 3. Maximum safe operating area graph (continuous dc).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.


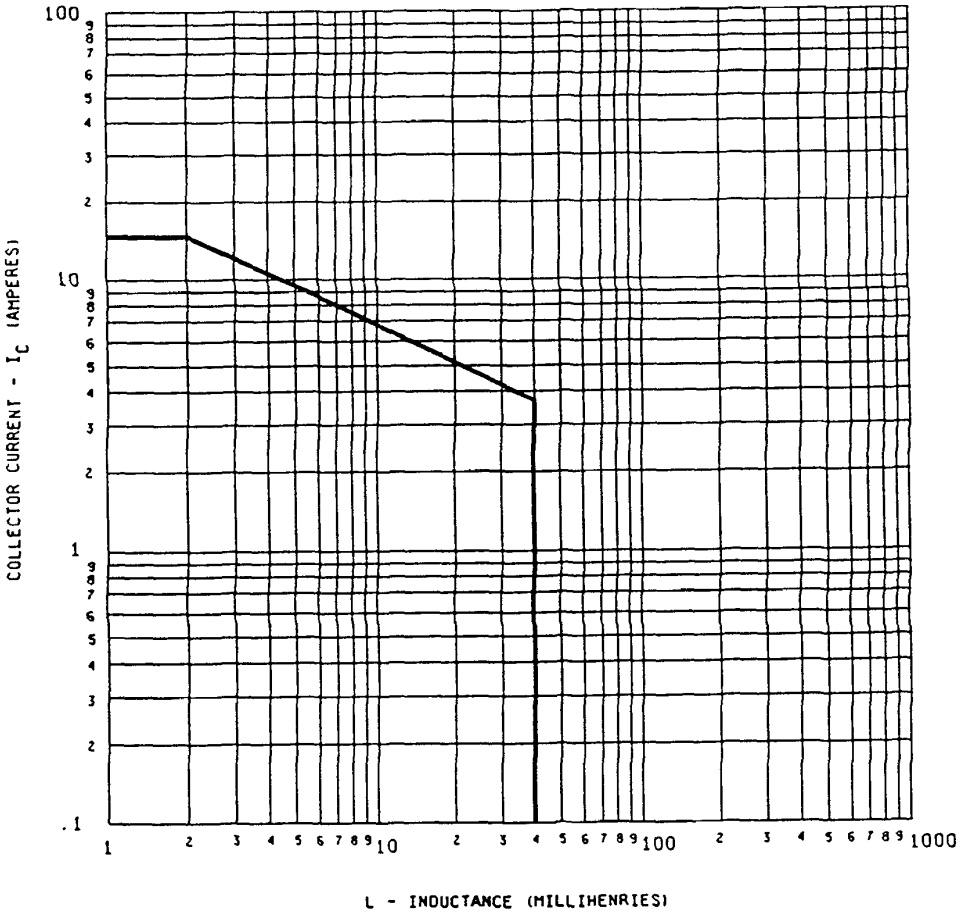


FIGURE 4. Safe operating area for switching between saturation and cutoff (unclamped inductive load).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

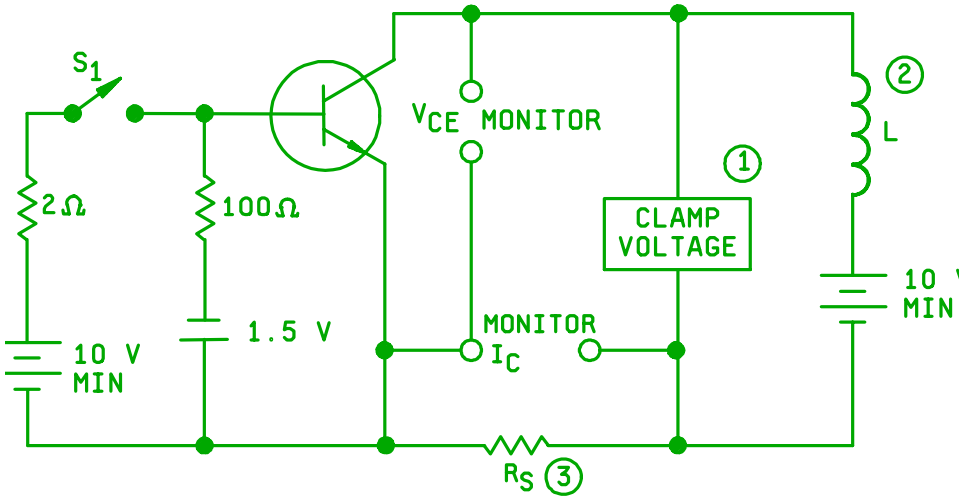

NOTES:

1. Either a clamping circuit or clamping diode may be used.
2. The coil used shall provide a minimum inductance of 5 mH at 15 A dc with a maximum dc resistance of 0.1 ohm. (For reference only: Signal Transformer Co., CH-20, or equivalent). (See 4.5.3).
3. $R_S \leq 0.1$ ohm, 12 W, 1 percent tolerance maximum (non-inductive).

Procedure:

1. With switch S1 closed, set the specified test conditions.
2. Open S1. Device fails if clamp voltage not reached and maintained until the current returns to zero.
3. Perform specified end point tests.

FIGURE 5. Clamped inductive sweep test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-19500.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation.

b. Lead finish as specified (see 3.3.1).

c. Type designation and quality assurance level.

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - AR, AV, MI, SM
Navy - AS, CG, MC
Air Force - 13, 19, 80, 85, 99

Preparing activity:
DLA - CC

(Project 5961-1479)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-19500/407C	**2. DOCUMENT DATE**

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, POWER TYPES 2N3055, JAN, JANTX AND JANTXV

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY				
a. Point of Contact Alan Barone	b. TELEPHONE Commercial 614-692-0510	DSN 850-0510	FAX 614-692-6939	EMAIL alan_barone@dscc.dla.mil
c. ADDRESS Defense Supply Center Columbus ATTN: DSCC-VAT Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 DSN 289-2340			

DD Form 1426, OCT 89 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:38Z
Check the source to verify that this is the current version before use.