
FED. SUP CLASS.
5307

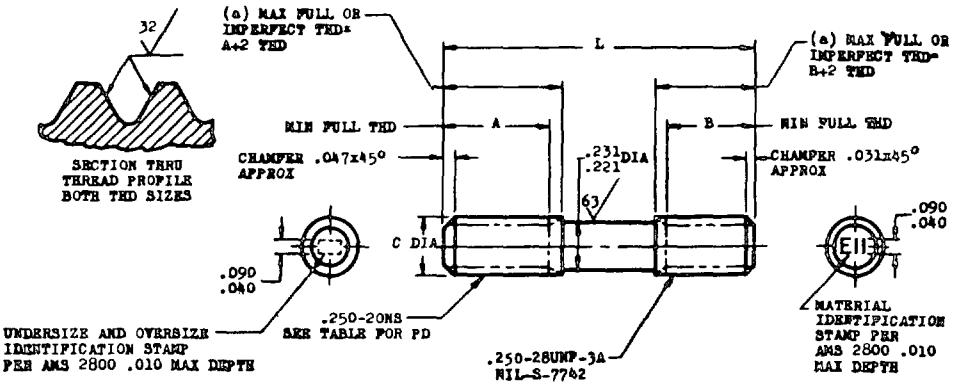

UNDERSIZE AND OVERSIZE IDENTIFICATION			-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C			.245 -.250	.245 -.250	.245 -.250	.245 -.250	.254 -.259	.254 -.259
PD BEFORE PLATING			.2183-.2193	.2213-.2223	.2243-.2253	.2273-.2283	.2303-.2313	.2333-.2343
PD AFTER PLATING			.2188-.2203	.2218-.2233	.2248-.2263	.2278-.2293	.2308-.2323	.2338-.2353
PD LEAD THREAD			.2125-.2145	.2155-.2175	.2185-.2205	.2215-.2235	.2245-.2265	.2275-.2295
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.062	.500	.438	AN125963	AN125964	AN125965	AN125966	AN125967	AN125968
1.125	.562	.438	AN125969	AN125970	AN125971	AN125972	AN125973	AN125974
1.188	.625	.438	AN125975	AN125976	AN125977	AN125978	AN125979	AN125980
1.250	.688	.438	AN125981	AN125982	AN125983	AN125984	AN125985	AN125986
1.250	.500	.656	AN126215	AN126216	AN126217	AN126218	AN126219	AN126220
1.312	.688	.500	AN125987	AN125988	AN125989	AN125990	AN125991	AN125992
1.375	.688	.562	AN125993	AN125994	AN125995	AN125996	AN125997	AN125998
1.375	.625	.656	AN126221	AN126222	AN126223	AN126224	AN126225	AN126226
1.375	.562	.688	AN126227	AN126228	AN126229	AN126230	AN126231	AN126232
1.438	.688	.562	AN125999	AN126000	AN126001	AN126002	AN126003	AN126004
1.500	.688	.688	AN126233	AN126234	AN126235	AN126236	AN126237	AN126238
1.500	.688	.562	AN126005	AN126006	AN126007	AN126008	AN126009	AN126010
1.562	.688	.562	AN126011	AN126012	AN126013	AN126014	AN126015	AN126016
1.625	.688	.562	AN126017	AN126018	AN126019	AN126020	AN126021	AN126022
1.688	.688	.562	AN126023	AN126024	AN126025	AN126026	AN126027	AN126028
1.750	.688	.562	AN126029	AN126030	AN126031	AN126032	AN126033	AN126034
1.812	.688	.562	AN126035	AN126036	AN126037	AN126038	AN126039	AN126040
1.875	.688	.562	AN126041	AN126042	AN126043	AN126044	AN126045	AN126046
1.938	.688	.562	AN126047	AN126048	AN126049	AN126050	AN126051	AN126052
2.000	.688	.562	AN126053	AN126054	AN126055	AN126056	AN126057	AN126058
2.062	.688	.562	AN126059	AN126060	AN126061	AN126062	AN126063	AN126064
2.125	.688	.562	AN126065	AN126066	AN126067	AN126068	AN126069	AN126070
2.188	.688	.562	AN126071	AN126072	AN126073	AN126074	AN126075	AN126076
2.250	.688	.562	AN126077	AN126078	AN126079	AN126080	AN126081	AN126082
2.375	.688	.562	AN126083	AN126084	AN126085	AN126086	AN126087	AN126088
2.500	.688	.562	AN126089	AN126090	AN126091	AN126092	AN126093	AN126094
2.625	.688	.562	AN126095	AN126096	AN126097	AN126098	AN126099	AN126100
2.750	.688	.562	AN126101	AN126102	AN126103	AN126104	AN126105	AN126106
2.875	.688	.562	AN126107	AN126108	AN126109	AN126110	AN126111	AN126112
3.000	.688	.562	AN126113	AN126114	AN126115	AN126116	AN126117	AN126118
3.125	.688	.562	AN126119	AN126120	AN126121	AN126122	AN126123	AN126124
3.250	.688	.562	AN126125	AN126126	AN126127	AN126128	AN126129	AN126130
3.375	.688	.562	AN126131	AN126132	AN126133	AN126134	AN126135	AN126136
3.500	.688	.562	AN126137	AN126138	AN126139	AN126140	AN126141	AN126142
3.625	.688	.562	AN126143	AN126144	AN126145	AN126146	AN126147	AN126148
3.750	.688	.562	AN126149	AN126150	AN126151	AN126152	AN126153	AN126154
3.875	.688	.562	AN126155	AN126156	AN126157	AN126158	AN126159	AN126160
4.000	.688	.562	AN126161	AN126162	AN126163	AN126164	AN126165	AN126166
4.125	.688	.562	AN126167	AN126168	AN126169	AN126170	AN126171	AN126172
4.250	.688	.562	AN126173	AN126174	AN126175	AN126176	AN126177	AN126178
4.375	.688	.562	AN126179	AN126180	AN126181	AN126182	AN126183	AN126184
4.500	.688	.562	AN126185	AN126186	AN126187	AN126188	AN126189	AN126190
4.625	.688	.562	AN126191	AN126192	AN126193	AN126194	AN126195	AN126196
4.750	.688	.562	AN126197	AN126198	AN126199	AN126200	AN126201	AN126202
4.875	.688	.562	AN126203	AN126204	AN126205	AN126206	AN126207	AN126208
5.000	.688	.562	AN126209	AN126210	AN126211	AN126212	AN126213	AN126214

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
(a) CROSS THREADING PERMISSABLE AT THREAD RUNOUTS ON SHORT STUDS. MATERIAL: STEEL AMS 6322.
(AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960.)
HARDNESS: ROCKWELL C26-32. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS291. MANUFACTURING SPECIFICATION AMS 7456. DO NOT USE UNASSIGNED PART NUMBERS.
(2) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010.
(b) INACTIVE FOR NEW DESIGN AFTER 31 MAY 1958
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 23 Jun 58 (2) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall be used for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

PA 11 CUST: AV, AS 11	AIR FORCE-NAVY AERONAUTICAL STANDARD STUD - STRAIGHT, .250-20 x .250-28	AN125951 THRU AN126274

*U.S. GOVERNMENT PRINTING OFFICE: 1967-251-815/3017

Project No. 5307-0342

☆U.S. GOVERNMENT PRINTING OFFICE: 1986 — 605-036/43942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.