
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

User activity

Review activity:
DLA - IS
NS

NOTE: This drawing was approved by user activities of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all superseded standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs not later than 6 months after the issue date of approval shown.

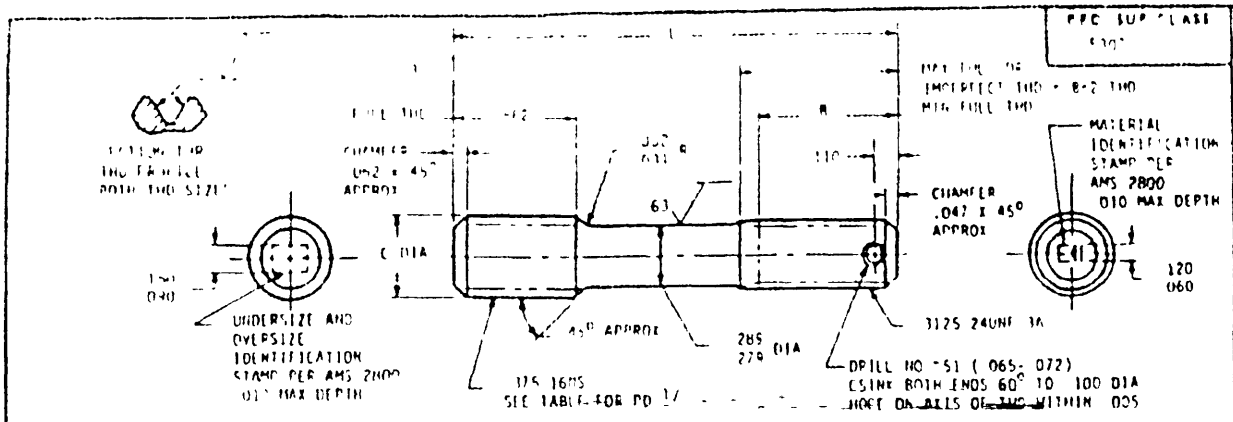

UNDERSIZE AND OVERSIZE IDENTIFICATION		- .003 (1)	STANDARD (0)	+ .003 (3)	+ .006 (6)	+ .009 (9)	+ .012 (12)
C 1/		.370 .375	.370- .375	.370- .375	.370- .375	.379 .384	.379- .384
PD BEFORE PLATING		.3357 .3367	.3387- .3397	.3417- .3427	.3447- .3457	.3477- .3487	.3507- .3517
PD AFTER PLATING		.3362 .3377	.3392 .3407	.3422- .3437	.3452 .3467	.3482 .3497	.3512- .3527
PD LEAD THREAD		.3294- .3314	.3324-.3344	.3354- .3374	.3384 .3404	.3414-.3434	.3444-.3464
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1 063	.500	AN153219	AN153220	AN153221	AN153222	AN153223	AN153224
1 250	.562	AN153225	AN153226	AN153227	AN153228	AN153229	AN153230
1 312	.625	AN153231	AN153232	AN153233	AN153234	AN153235	AN153236
1 375	.625	AN153237	AN153238	AN153239	AN153240	AN153241	AN153242
1 438	.625	AN153243	AN153244	AN153245	AN153246	AN153247	AN153248
1 500	.625	AN153249	AN153250	AN153251	AN153252	AN153253	AN153254
1 562	.625	AN153255	AN153256	AN153257	AN153258	AN153259	AN153260
1 625	.625	AN153261	AN153262	AN153263	AN153264	AN153265	AN153266
1 688	.625	AN153267	AN153268	AN153269	AN153270	AN153271	AN153272
1 750	.625	AN153273	AN153274	AN153275	AN153276	AN153277	AN153278
1 812	.625	AN153279	AN153280	AN153281	AN153282	AN153283	AN153284
1 875	.625	AN153285	AN153286	AN153287	AN153288	AN153289	AN153290
1 938	.625	AN153291	AN153292	AN153293	AN153294	AN163295	AN153296
2 000	.625	AN153297	AN153298	AN153299	AN153300	AN153301	AN153302
2 062	.625	AN153303	AN153304	AN153305	AN153306	AN153307	AN153308
2 125	.625	AN153309	AN153310	AN153311	AN153312	AN153313	AN153314
2 188	.625	AN153315	AN153316	AN153317	AN153318	AN153319	AN153320
2 250	.625	AN153321	AN153322	AN153323	AN153324	AN153325	AN153326
2 312	.625	AN153327	AN153328	AN153329	AN153330	AN153331	AN153332
2 438	.625	AN153333	AN153334	AN153335	AN153336	AN153337	AN153338
2 562	.625	AN153339	AN153340	AN153341	AN153342	AN153343	AN153344
2 688	.625	AN153345	AN153346	AN153347	AN153348	AN153349	AN153350
2 812	.625	AN153351	AN153352	AN153353	AN153354	AN153355	AN153356
2 938	.625	AN153357	AN153358	AN153359	AN153360	AN153361	AN153362
3 062	.625	AN153363	AN153364	AN153365	AN153366	AN153367	AN153368
3 188	.625	AN153369	AN153370	AN153371	AN153372	AN153373	AN153374
3 312	.625	AN153375	AN153376	AN153377	AN153378	AN153379	AN153380
3 438	.625	AN153381	AN153382	AN153383	AN153384	AN153385	AN153386
3 562	.625	AN153387	AN153388	AN153389	AN153390	AN153391	AN153392
3 688	.625	AN153393	AN153394	AN153395	AN153396	AN153397	AN153398
3 812	.625	AN153399	AN153400	AN153401	AN153402	AN153403	AN153404
3 938	.625	AN153405	AN153406	AN153407	AN153408	AN153409	AN153410
4 062	.625	AN153411	AN153412	AN153413	AN153414	AN153415	AN153416

1/ PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR

NOTES
1 MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957)
2 HARDNESS. ROCKWELL C26-32
3 FINISH: CADMIUM PLATE AMS 2400 DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN
4 SURFACE ROUGHNESS AS 107.
5 MANUFACTURING SPECIFICATION AMS 7456 PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640
6 BREAK SHARP EDGES .003- .015 UNLESS OTHERWISE SPECIFIED
7 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
8 TOLERANCES LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ±2°
DO NOT USE UNASSIGNED PART NUMBERS

(5) Reinstated as of 28 February 1993

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 15 MAY 50 REVISED (1) 25 MAR 55 (2) 26 OCT 72 (3) 14 OCT 81 (4) 9 OCT 87 (5) 28Feb93

P.A. 11 Other Govt AS FSC 5307-0613 PROCUREMENT SPECIFICATION (Yes)	AERONAUTICAL STANDARD STUD STEPPED DRILLED, 1.5 DIA ENGAGEMENT 3/8 - 24 - 1/2 - 24	AN153201 THRU AN153500 SHEET 1 OF 1

DISC Form 99
AER 76

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.