
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN168801 THRU AN169100

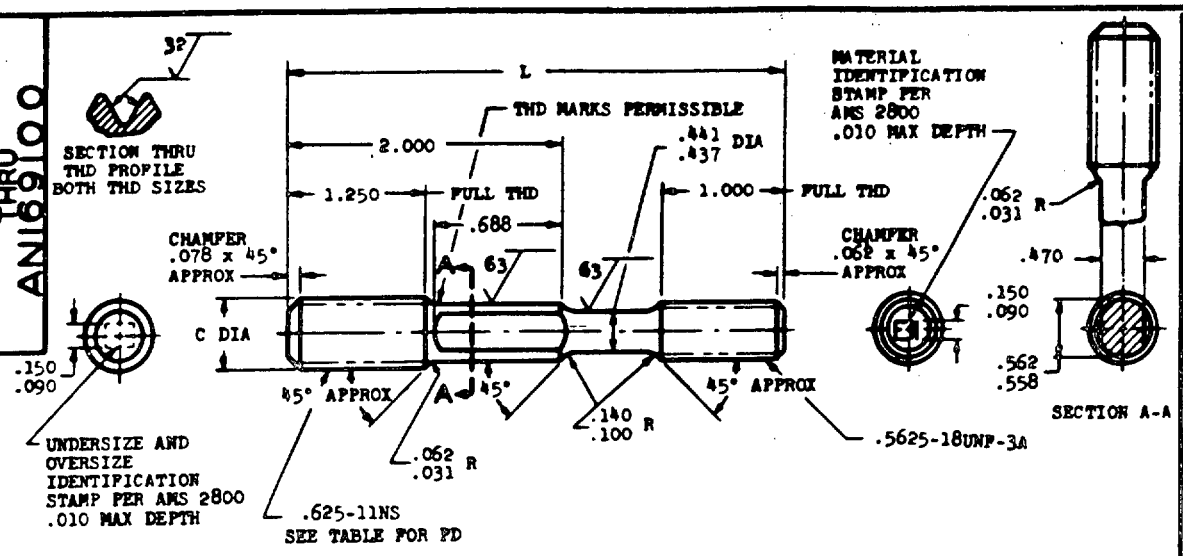

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.620- .325	.620- .625	.620- .625	.620- .625	.629- .634	.629- .634
PD BEFORE PLATING	.5682-.5692	.5712-.5722	.5742-.5752	.5772-.5782	.5802-.5812	.5832-.5842
PD AFTER PLATING	.5687-.5702	.5717-.5732	.5747-.5762	.5777-.5792	.5807-.5822	.5837-.5852
PD LEAD THREAD	.5610-.5530	.5340-.5660	.5670-.5690	.5700-.5720	.5730-.5750	.5760-.5780
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
3.250	AN168813	AN168814	AN168815	AN168816	AN168817	AN168818
3.375	AN168819	AN168820	AN168821	AN168822	AN168823	AN168824
3.500	AN168825	AN168826	AN168827	AN168828	AN168829	AN168830
3.625	AN168831	AN168832	AN168833	AN168834	AN168835	AN168836
3.750	AN168837	AN168838	AN168839	AN168840	AN168841	AN168842
3.875	AN168843	AN168844	AN168845	AN168846	AN168847	AN168848
4.000	AN168849	AN168850	AN168851	AN168852	AN168853	AN168854
4.125	AN168855	AN168856	AN168857	AN168858	AN168859	AN168860
4.250	AN168861	AN168862	AN168863	AN168864	AN168865	AN168866
4.375	AN168867	AN168868	AN168869	AN168870	AN168871	AN168872
4.500	AN168873	AN168874	AN168875	AN168876	AN168877	AN168878
4.625	AN168879	AN168880	AN168881	AN168882	AN168883	AN168884
4.750	AN168885	AN168886	AN168887	AN168888	AN168889	AN168890
4.875	AN168891	AN168892	AN168893	AN168894	AN168895	AN168896
5.000	AN168897	AN168898	AN168899	AN168900	AN168901	AN168902
5.125	AN168903	AN168904	AN168905	AN168906	AN168907	AN168908
5.250	AN168909	AN168910	AN168911	AN168912	AN168913	AN168914
5.375	AN168915	AN168916	AN168917	AN168918	AN168919	AN168920
5.500	AN168921	AN168922	AN168923	AN168924	AN168925	AN168926
5.625	AN168927	AN168928	AN168929	AN168930	AN168931	AN168932
5.750	AN168933	AN168934	AN168935	AN168936	AN168937	AN168938
5.875	AN168939	AN168940	AN168941	AN168942	AN168943	AN168944
6.000	AN168945	AN168946	AN168947	AN168948	AN168949	AN168950
6.125	AN168951	AN168952	AN168953	AN168954	AN168955	AN168956
6.250	AN168957	AN168958	AN168959	AN168960	AN168961	AN168962
6.375	AN168963	AN168964	AN168965	AN168966	AN168967	AN168968
6.500	AN168969	AN168970	AN168971	AN168972	AN168973	AN168974
6.625	AN168975	AN168976	AN168977	AN168978	AN168979	AN168980
6.750	AN168981	AN168982	AN168983	AN168984	AN168985	AN168986
6.875	AN168987	AN168988	AN168989	AN168990	AN168991	AN168992
7.000	AN168993	AN168994	AN168995	AN168996	AN168997	AN168998
7.125	AN168999	AN169000	AN169001	AN169002	AN169003	AN169004
7.250	AN169005	AN169006	AN169007	AN169008	AN169009	AN169010

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN168801 THRU AN169100
NONE	STUD-STEPPED, HECKED, WRENCH PAD, 2 DIA ENGAGEMENT, .625-11 x .5625-18	

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

E-25-121 PROJECT 5307-0426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.