
AN169401 THRU AN169700

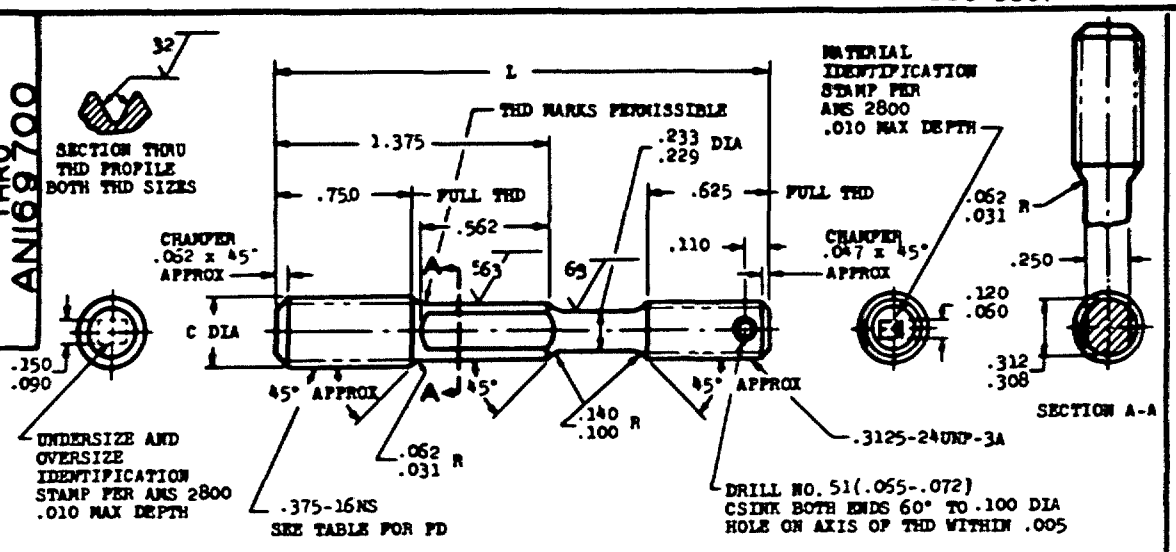

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.370- .375	.370- .375	.370- .375	.370- .375	.379- .384	.379- .384
FD BEFORE PLATING	.3357-.3357	.3387-.3397	.3417-.3427	.3447-.3457	.3477-.3487	.3507-.3517
FD AFTER PLATING	.3362-.3377	.3392-.3407	.3422-.3437	.3452-.3467	.3482-.3497	.3512-.3527
FD LEAD THREAD	.3294-.3314	.3324-.3344	.3354-.3374	.3384-.3404	.3414-.3434	.3444-.3464
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.250	AN169413	AN169414	AN169415	AN169416	AN169417	AN169418
2.312	AN169419	AN169420	AN159421	AN169422	AN169423	AN169424
2.375	AN169425	AN159426	AN169427	AN169428	AN169429	AN169430
2.438	AN169431	AN169432	AN169433	AN169434	AN169435	AN169436
2.500	AN169437	AN169438	AN169439	AN169440	AN169441	AN169442
2.625	AN169443	AN169444	AN169445	AN169446	AN169447	AN169448
2.750	AN169449	AN169450	AN169451	AN169452	AN169453	AN169454
2.875	AN169455	AN169456	AN169457	AN169458	AN169459	AN169460
3.000	AN169461	AN169462	AN169463	AN169464	AN169465	AN169466
3.125	AN169467	AN169468	AN169469	AN169470	AN169471	AN169472
3.250	AN169473	AN169474	AN169475	AN169476	AN169477	AN169478
3.375	AN169479	AN169480	AN169481	AN169482	AN169483	AN169484
3.500	AN169485	AN159486	AN169487	AN169488	AN169489	AN169490
3.525	AN169491	AN169492	AN169493	AN169494	AN169495	AN169496
3.750	AN169497	AN169498	AN169499	AN169500	AN169501	AN169502
3.875	AN169503	AN169504	AN169505	AN169506	AN169507	AN169508
4.000	AN169509	AN169510	AN169511	AN169512	AN169513	AN169514
4.125	AN169515	AN169516	AN169517	AN169518	AN169519	AN169520
4.250	AN169521	AN169522	AN169523	AN169524	AN169525	AN169526
4.375	AN169527	AN169528	AN169529	AN169530	AN169531	AN169532
4.500	AN169533	AN169534	AN169535	AN169536	AN169537	AN169538
4.525	AN169539	AN169540	AN169541	AN169542	AN169543	AN169544
4.750	AN159545	AN169546	AN169547	AN169548	AN169549	AN159550
4.875	AN169551	AN169552	AN169553	AN169554	AN169555	AN169556
5.000	AN159557	AN169558	AN169559	AN169560	AN169561	AN169562
5.125	AN169563	AN169564	AN169565	AN169566	AN169567	AN169568
5.250	AN159569	AN169570	AN169571	AN169572	AN169573	AN169574
5.375	AN169575	AN169576	AN169577	AN169578	AN169579	AN169580
5.500	AN169581	AN169582	AN169583	AN169584	AN169585	AN169586
5.525	AN169587	AN169588	AN169589	AN169590	AN169591	AN169592
5.750	AN159593	AN169594	AN169595	AN169596	AN169597	AN169598

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD. DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN169401 THRU AN169700
NONE	STUD-SHEPPED, DRILLED, BECKED, WRENCH PAD, 2 DIA ENGAGEMENT, .375-16 x .3125-24	

APPROVED 19 May 50 REVISED (1) 15 Mar 55 (2) 20 Oct 72 (3) 9 OCT 87

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

E-25-121 PROJECT 5307-0428

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.