Project No 5310-0501

FSC 5310

USER SYMBOLS
NAVY - AS
Air Force - 82

REVIEWER SYMBOLS
ARMY - WC
DSA - IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

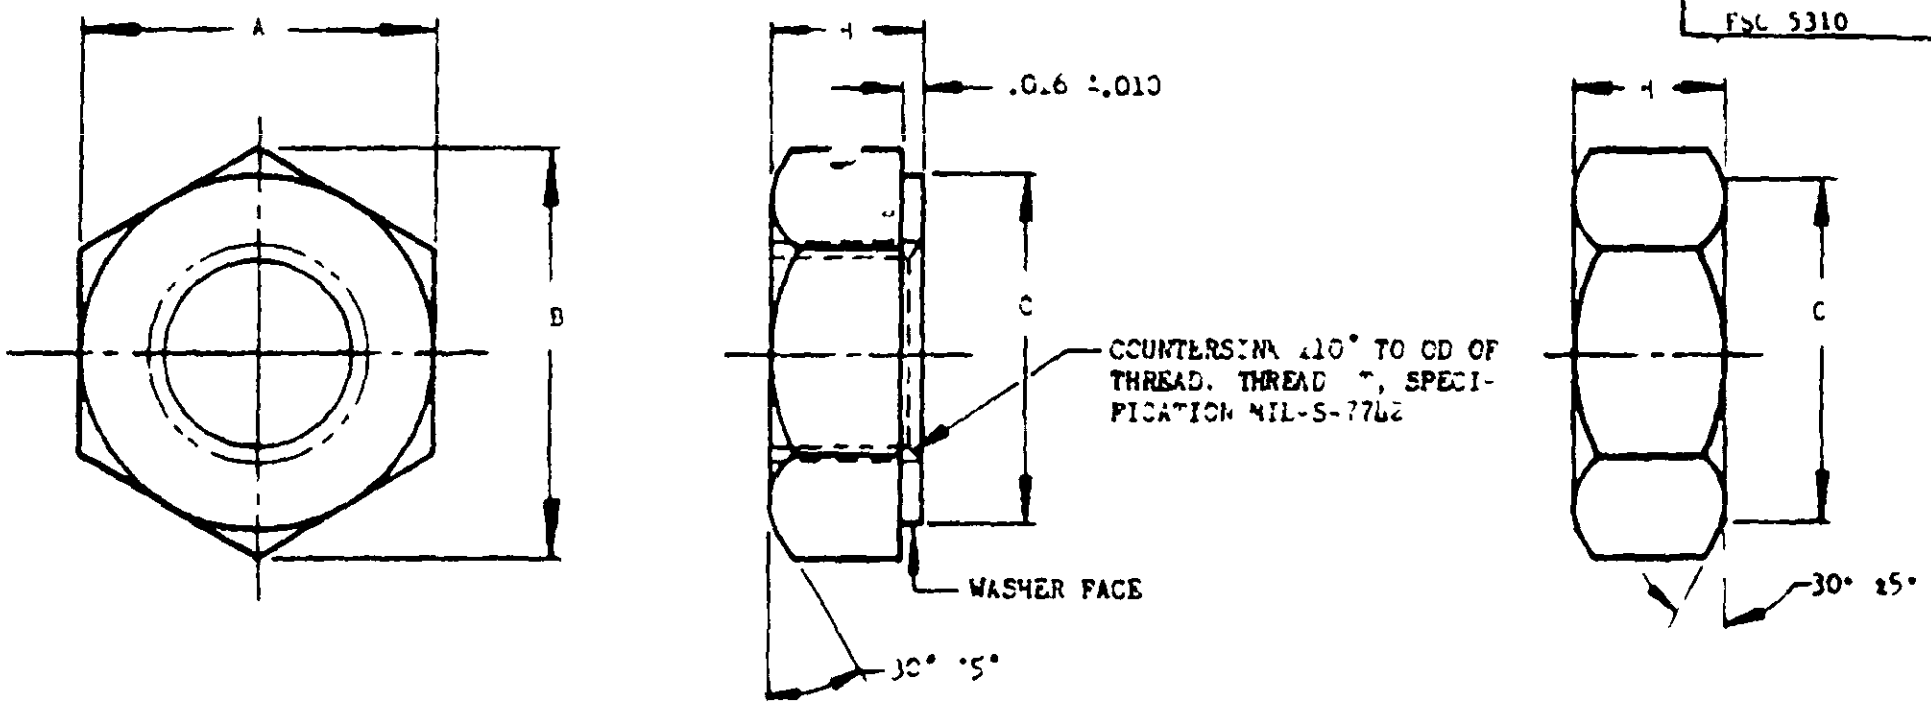
A
B
H
.016 ±.010
C
COUNTERSINK 110° TO OD OF THREAD. THREAD T, SPECIFICATION MIL-S-7742
WASHER FACE
30° ±5°
H
C
30° ±5°

OPTIONAL CHAMFER IN LIEU OF WASHER FACE

	AN PART NUMBERS				(a) THREAD T	(b) A		(c) B REF	C DIA		(d) H	
	ALLOY STEEL	CORROSION-RESISTANT STEEL	BRASS	(f) ALUMINUM ALLOY		MAX	MIN		MAX	MIN	MAX	MIN
	AN345-0	AN345C0	AN345B0		NO 0-80 UNF-2B	.156	.150	.180	156	.140	050	.043
(e)	~~AN345-1~~	~~AN345C1~~	~~AN345B1~~		~~NO. 1-72 UNF-2B~~	~~.156~~	~~.150~~	~~.180~~	~~.156~~	~~.140~~	~~.050~~	~~.043~~
	~~AN345-2~~	~~AN345C2~~	~~AN345B2~~		~~NO. 2-64 UNF-2B~~	~~.188~~	~~.180~~	~~.217~~	~~.188~~	~~.162~~	~~.066~~	~~.057~~
	~~AN345-3~~	~~AN345C3~~	~~AN345B3~~		~~NO. 3-56 UNF-2B~~	~~.188~~	~~.180~~	~~.217~~	~~.188~~	~~.169~~	~~.066~~	~~.057~~
	~~AN345-4~~	~~AN345C4~~	~~AN345B4~~		~~NO. 4-48 UNF-2B~~	~~.250~~	~~.241~~	~~.289~~	~~.250~~	~~.225~~	~~.098~~	~~.087~~
	~~AN345-5~~	~~AN345C5~~	~~AN345B5~~		~~NO. 5-44 UNF-2B~~	~~.313~~	~~.302~~	~~.362~~	~~.313~~	~~.282~~	~~.114~~	~~.102~~
	~~AN345-6~~	~~AN345C6~~	~~AN345B6~~		~~NO. 6-40 UNF-2B~~	~~.313~~	~~.302~~	~~.362~~	~~.313~~	~~.282~~	~~.114~~	~~.102~~
	~~AN345-8~~	~~AN345C8~~	~~AN345B8~~		~~NO. 8-36 UNF-2B~~	~~.344~~	~~.332~~	~~.398~~	~~.344~~	~~.310~~	~~.130~~	~~.117~~
	AN345-10	AN345C10	AN345B10	AN345DD10	NO. 10-32 UNF-2B	.375	.362	.433	.375	.336	.130	.117
	AN345-416	AN345C416	AN345B416	AN345DD416	1/4-28 UNF-2B	438	.423	506	.438	394	193	178
	AN345-516	AN345C516	AN345B516		5/16-24 UNF-2B	563	.545	650	.563	507	225	208
	AN345-616	AN345C616	AN345B616		3/8-24 UNF-2B	.625	.607	722	625	.563	257	239

(a) CLASS 2 THREADS MAY BE SUBSTITUTED FOR CLASS 2B THREADS UNTIL EXISTING STOCKS OF THE NUTS WITH CLASS 2 THREADS ARE EXHAUSTED

(b) FOR ALUMINUM ALLOY NUTS, TOLERANCES ON A MAY CONFORM TO APPLICABLE MATERIAL SPECIFICATIONS FOR BAR AND ROD.

(c) REFERENCE DIMENSIONS ARE FOR DESIGN PURPOSES ONLY AND ARE NOT AN INSPECTION REQUIREMENT

(d) THE H DIMENSION SHALL BE MEASURED AT A POINT APPROXIMATELY HALFWAY BETWEEN THE MINOR DIAMETER OF THE HOLE AND THE FLAT OF THE NUT.

(e) NUMBERS 1, 2, 3, 4, 5, 6, AND 8 SIZES ARE NOT RECOMMENDED FOR NEW DESIGN

(f) ALUMINUM ALLOY NUTS INACTIVE FOR DESIGN AFTER 19 JULY 1955.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337

MATERIAL STEEL, 50,000-PSI TENSILE STRENGTH, MINIMUM, COMMERCIAL GRADE
CORROSION-RESISTANT STEEL, SPECIFICATION AN-QQ-S-770, CONDITION QT, CLASS II (431) OR SPECIFICATION MIL-S-7720, COMPOSITION FM (303)
BRASS, COMMERCIAL GRADE.
(f) ALUMINUM ALLOY, SPECIFICATION QQ-A-268 OR QQ-A-355

HEAT TREAT: (f) ALUMINUM ALLOY, 62,000 PSI TENSILE STRENGTH, MINIMUM, SPECIFICATION MIL-H-6088

FINISH STEEL, CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS 3.
CORROSION-RESISTANT STEEL, PASSIVATE.
BRASS, NONE
(f) ALUMINUM ALLOY, ANODIZE, SPECIFICATION MIL-A-8625

NUTS SHALL BE FREE OF ALL LOOSE OR HANGING BURRS OR SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE

DIMENSIONS IN INCHES

IN CASE OF CONFLICT, THE REQUIREMENTS SPECIFIED HEREON SHALL TAKE PRECEDENCE OVER THE REQUIREMENTS SPECIFIED IN SPECIFICATION MIL-S-933

⑥ INACTIVE FOR DESIGN AFTER 31 MARCH 1970, USE MS35650
⑥ CANCELED AFTER 31 MARCH 1970, EXCEPT ALUMINUM ALLOY, AND DASH NOS 1,3, AND 5 IN ALL MATERIALS, SEE INTERCHANGEABILITY TABLE ON MS35650 FOR SUBSTITUTIVE PARTS

APPROVED 22 Jul 43 REVISED ① 12 Jan 44 ② 17 Apr 45 ③ 14 Jul 45 ④ 19 Jan 55 ⑤ 10 Jun 66 ⑥ 31 March 1970

PROCUREMENT SPECIFICATION
MIL-S-933

AIR FORCE-NAVY AERONAUTICAL STANDARD

NUT, PLAIN, HEXAGON, NON-STRUCTURAL, FINE THREAD

AN345

U. S. GOVERNMENT PRINTING OFFICE

SUPERSEDES FORMER AIR FORCE AND NAVY STANDARD DRAWINGS OF AN 345

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:15Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

INCH POUND
AN345
NOTICE 1
01 November 1989

MILITARY SPECIFICATION SHEET

NUT, PLAIN, HEXAGON, NON-STRUCTURAL, FINE THREAD

AN345 Rev6, dated 31 Mar 1970, remains inactive for new design, however, the document is valid for acquisition when needed.

Preparing activity
Navy-AS

AMSC N/A FSC 5310
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:15Z
Check the source to verify that this is the currentversion before use.