DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC N/A

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTES TO PRINTER: REDUCE BORDER FROM ORIGINAL 11-3/16-1/4 TO 6-27/32-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8-1/2 SHEET. PRINT BOTTOM BORDER-LINE 3/8 INCH FROM BOTTOM EDGE OF 8-1/2 SHEET. SIGNATURE FORM NOT TO BE PRINTED ON STANDARD DOOD SHEETS.

PROCUREMENT SPECIFICATION MIL-V-5529

(4) Cancelled ---. No Superseding Document.


AIR FORCE-NAVY AERONAUTICAL STANDARD

VALVE, 4-WAY ROTARY SELECTOR, 3,000 PSI, INTERFLOW

AN6294

SHEET 1 OF 2

4820-F039

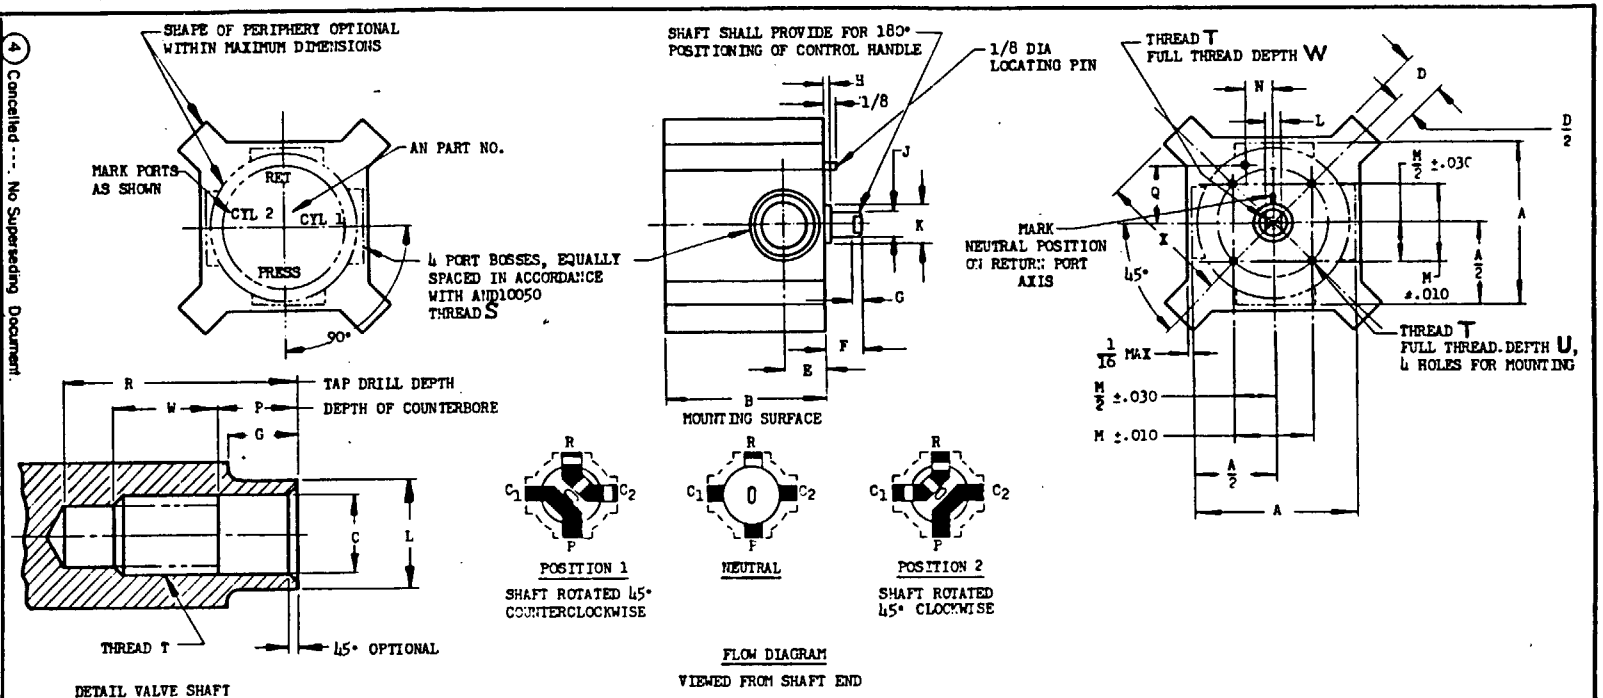

AN PART NUMBER	TUBING OD	RATED FLOW GPM	A +.00 -.25	B MAX	C +.003 -.000	D MAX	E +.00 -.08	F	G +.030 -.000	H MAX	J +.000 -.010 DIA	K MAX DIA	L +.000 -.003	M	N	P ±.005	Q	R ±.010	THREAD S	THREAD T	U MIN	W MIN	W+P REF	X MAX
AN6294-4	.250	1.2	2.12	2.33	.196	.69	.51	.625	.157	.218	.380	.50	.249	1.370	.44	.187	.81	.562	7/16-20 NF-3	NO. 10-32 NF-2	.25	.25	.437	1.66
AN6294-6	.375	3.5		2.50			.54												9/16-18 NF-3					
AN6294-8	.500	6	2.87	3.25	.257	1.13	.66	.750	.219	.312	.505	.750	.312	1.768	.56	.254	1.00	.781	3/4 -16 NF-3	1/4-28 NF-2	.31	.38	.634	1.94
AN6294-12	.750	16	4.12	4.25			.91												1-1/16-12 N -3		.38			2.59

THIS VALVE HAS INTERFLOW WHEN CHANGING SHAFT POSITION.

INTEGRAL STOPS MUST BE PROVIDED TO LIMIT SHAFT TRAVEL TO 45° ±5° ON EACH SIDE OF NEUTRAL.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO PLACE DECIMALS ±.03, THREE PLACE DECIMALS ±.010, ANGLES ±1/2°.

APPROVED 10 Mar 50 REVISED (1) 23 Apr 52 (2) 27 Nov 53 (3) 7 Dec 55 (4) 10 June 1988

DRAWN BY

TYPED BY

CHECKED BY

DATE

FSC 4820

Downloaded: 2026-10-27 The current version is the current version

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

PROCUREMENT SPECIFICATION
MIL-V-5529

AIR FORCE-NAVY AERONAUTICAL STANDARD

(1) VALVE - 4 WAY ROTARY SELECTOR, 3000 PSI, INTERFLOW

AN6294

SHEET 2 OF 2

AN PART NO.	OPERATING TORQUE AT 3000 PSI INCH POUNDS MAXIMUM	MAXIMUM TOTAL PRESSURE DROP AT RATED FLOW PSI P → C+C → R (a)
AN6294-4	20	25
AN6294-6	20	50
AN6294-8	35	50
AN6294-12	45	75

(a) MAXIMUM PRESSURE DROP AT RATED FLOW FOR P → C OR C → R SHALL NOT EXCEED 60% OF THE VALUE LISTED IN THIS TABLE FOR MAXIMUM TOTAL PRESSURE DROP

PROOF PRESSURE AND LEAKAGE TEST

SHAFT POSITION	PRESSURE AT P PSI	PRESSURE AT R PSI	BLOCKED PORTS	OPEN PORTS	REQUIREMENTS
NEUTRAL, POSITION 1 AND POSITION 2	4500	0	C_1 AND C_2	R	(c) NO EXTERNAL LEAKAGE OR DAMAGE. LEAKAGE AT R PERMISSIBLE
NEUTRAL, POSITION 1 AND POSITION 2	0	1500	P, C_1 AND C_2	NONE	NO EXTERNAL LEAKAGE OR DAMAGE
NEUTRAL, POSITION 1 AND POSITION 2	0	5	P, C_1 AND C_2	NONE	NO EXTERNAL LEAKAGE
NEUTRAL	3000	0	NONE	C_1, C_2 AND R	(b) NO EXTERNAL LEAKAGE. TOTAL MAXIMUM INTERNAL LEAKAGE 1 DROP PER MINUTE FOR SIZES -4 AND -6, 2 DROPS PER MINUTE FOR SIZE -8 AND 4 DROPS PER MINUTE FOR SIZE -12 IN ANY POSITION OF SHAFT WITHIN ±4° OF NEUTRAL.
POSITION 1 AND POSITION 2	3000	0	C_1 AND C_2	R	(b) NO EXTERNAL LEAKAGE. MAXIMUM INTERNAL LEAKAGE 1 DROP PER MINUTE FOR SIZES -4 AND -6, 2 DROPS PER MINUTE FOR SIZE -8 AND 4 DROPS PER MINUTE FOR SIZE -12 IN ANY POSITION OF SHAFT WITHIN 4° OF STOP

(b) THREE MINUTE SEATING PERIOD PERMISSIBLE BEFORE MEASURING LEAKAGE.

(c) HOLD PRESSURE FOR 1 MINUTE.

APPROVED 10 Mar 50 REVISED (4) For changes see page 1 10 JUN 1988

NOTES TO PRINTER: REDUCE BORDER FROM ORIGINAL 11-3/8x16-1/4 TO 6-7/8x9-4/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE PRINTED ON STANDARD BOOK SHEET.

DRAWN BY _____ DATE _____
TYPED BY _____
CHECKED BY _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.