This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

P.A. AIR FORCE-99
Other Cust AIR FORCE-99
NAVY-AS
ARMY-AV

PROCUREMENT SPECIFICATION
MIL-R-81729


SUPERSEDES: SUPERSEDES USAF DRAWING 44G2645I, USAF DRAWING 52F3721

AIR FORCE-NAVY AERONAUTICAL STANDARD

BELT ASSEMBLY-TROOP AND TURRET GUNNER'S SAFETY

AN6506

SHEET 1 OF 1

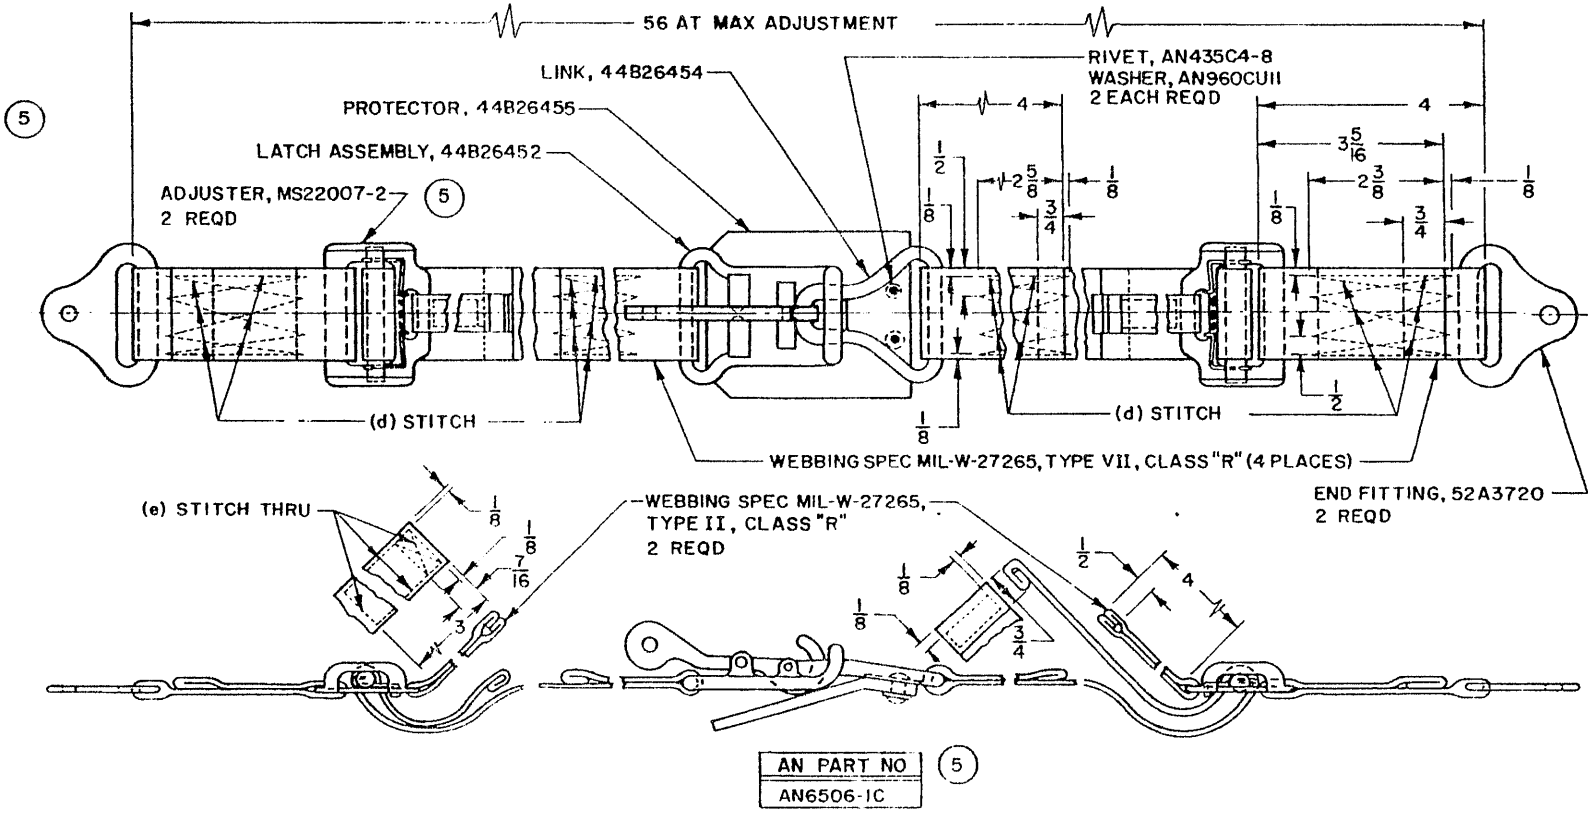

(a) PREVIOUS PART NUMBER AN6506-1 INACTIVE FOR DESIGN AFTER 23 SEPTEMBER 1949. AN6506-1A REPLACES AND IS INTERCHANGEABLE WITH AN6506-1.
(b) PREVIOUS PART NUMBER AN6506-1A INACTIVE FOR DESIGN AFTER 10 JULY 1950. AN6506-1B REPLACES AND IS INTERCHANGEABLE WITH AN6506-1A.
(c) PREVIOUS PART NUMBER AN6506-1B INACTIVE FOR DESIGN AFTER 10 JULY 54. AN6506-1C REPLACES AND IS INTERCHANGEABLE WITH AN6506-1B.
(d) STITCHING SHALL BE WITH NYLON THREAD, SPECIFICATION ~~[illegible]~~, V-T-295, TYPE I OR II, CLASS 1, SIZE #5.
(e) STITCHING SHALL BE WITH NYLON THREAD, SPECIFICATION ~~[illegible]~~, V-T-295, TYPE I OR II, CLASS 1, SIZE "E".
STITCHING INDICATED BY DOTTED LINES.
UNLESS OTHERWISE SPECIFIED, ALL STITCHING SHALL BE NOT LESS THAN 7 NOR MORE THAN 9 STITCHES PER INCH IN ACCORDANCE WITH SPECIFICATION FED-STD-751, TYPE 301.
ENDS OF ALL STITCHING SHALL BE BACK STITCHED NOT LESS THAN ONE-HALF INCH.
COLOR OF ALL THREAD SHALL MATCH THE NYLON WEBBING WHICH SHALL BE OLIVE DRAB COLOR NUMBER 34087 IN ACCORDANCE WITH FED-STD-595.
THE ENDS OF ALL WEBBING SHALL BE SEARED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/32.
FOR MANUFACTURING DETAILS OF PARTS IDENTIFIED, HEREON BY USAF DRAWING NUMBERS, SEE THE AN AERO STANDARD ISSUE OF THE RESPECTIVE USAF DRAWING.
FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

FED. SUP CLASS 1680

APPROVED 15 MAY 47 REVISED (1) 23 SEPT 49 (2) 10 JULY 50 (3) 10 JULY 54 (4) 2 JAN 69 (5) 2 DEC 76

Source: https://assist.dla.mil -- Downloaded: 20261O-26T14:23Z
Check the source to verify that this is the current version before use.