
FED. SUP. CLASS
4730

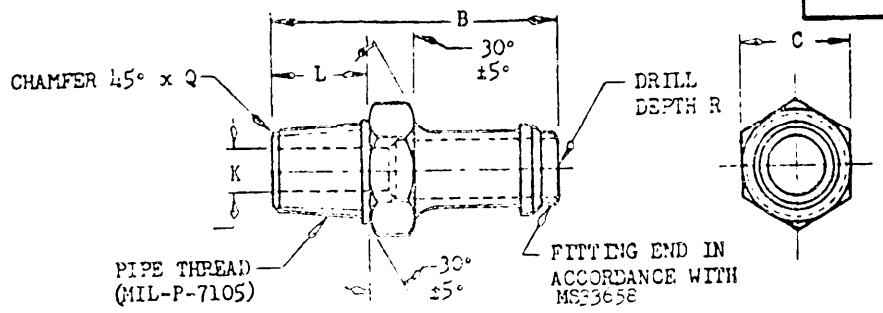

DASH NO.	HOSE ID	PIPE THD ANPT	B ±1/32	C		X ±.003 DIA	L	Q	R	WEIGHT MAX (LBS.) COPPER ALLOY	AL ALLOY	STEEL	TI ALLOY
4	1/4	1/8	2-5/64	.437	±.004		25/64	1/32		.039	.013		
6	3/8	1/4	2-11/32	.625	±.004		19/32	3/64		.069	.023		
8	1/2	3/8	2-3/8	.750	±.004		19/32	3/64		.099	.033		
9	5/8	3/8	2-3/8	.875	±.004	.463	37/64	3/64	1-5/8	.126	.042		
10	5/8	1/2	2-37/64	.937	±.004		47/64	1/16		.171	.057		
11	3/4	3/8	2-13/32	1.000	±.004	.403	19/32	3/64	1-5/8	.159	.053		
12	3/4	3/4	2-5/8	1.125	±.005		25/32	1/16		.258	.086		
13	1	3/8	2-5/8	1.250	±.005	.403	25/32	3/64	1-5/8	.258	.086		
16	1	3/4	2-5/8	1.250	±.005	(a) .717 (a) .7[illegible]	25/32	1/16	1-21/32	.270	.090		
17	1	1	2-27/32	1.375	±.005		31/32	3/64		.381	.127		
20	1-1/4	1-1/4	2-57/64	1.750	±.016		63/64	3/64		.681	.227		
21	1-1/4	1	2-7/8	1.500	±.005	.838	31/32	3/64	1-21/32	.471	.157		
24	1-1/2	1-1/2	2-15/16	2.000	±.015		1	3/64		.825	.275		
25	1-1/2	1-1/4	2-29/32	1.750	±.015	1.091	31/32	3/64	1-21/32	.705	.235		

(a) THESE DIMENSIONS ARE LIMITS AND SPECIFIED TOLERANCES DO NOT APPLY.
MATERIAL: COPPER ALLOY, ALUMINUM ALLOY; BARS. STEEL, TITANIUM ALLOY; BARS, SHAPES, OR FORGINGS. SEE PROCUREMENT SPECIFICATION.
FINISH: SEE PROCUREMENT SPECIFICATION.
NO CODE LETTER IN PART NUMBER FOR COPPER ALLOY.
(9) ADD D AFTER DASH NUMBER FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD S AFTER DASH NUMBER FOR STEEL.
ADD T AFTER DASH NUMBER FOR TITANIUM ALLOY.
(9) ADD W AFTER DASH NUMBER FOR 7075-T73 ALUMINUM ALLOY.
TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.
EXAMPLES OF PART NUMBERS: AN840-6 -- ADAPTER, 3/8 ID HOSE, COPPER ALLOY.
(9) AN840-6D -- ADAPTER, 3/8 ID HOSE, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN840-6S -- ADAPTER, 3/8 ID HOSE, STEEL.
AN840-6T -- ADAPTER, 3/8 ID HOSE, TITANIUM ALLOY.
(9) AN840-6W -- ADAPTER, 3/8 ID HOSE, 7075-T73 ALUMINUM ALLOY.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±1/2°.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

INACTIVE FOR DESIGN AFTER 8 APRIL 1953. NO SUPERSEDING AN STANDARD. SEE MIL-STD-962 FOR STATUS CRITERIA.

(9) REDRAWN

(9) denotes changes

APPROVED 2 FEB 41
REVISED (9) 20 MAR 79

User activities: Army - ME, AV; Navy - AS; Air Force - 99

Review activities: Army - ME, AV; Navy - AS; Air Force - 99; DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. Air Force--99
Other Cust

International interest

AIR FORCE - NAVY AERONAUTICAL STANDARD

ADAPTER, STRAIGHT, PIPE TO HOSE

AN 840

Procurement Specification
MIL-F-5509

SUPERSEDES: USAF DRAWING 39A2447

PAGE 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-0965

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.