
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy aeronautical standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of new contractual supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

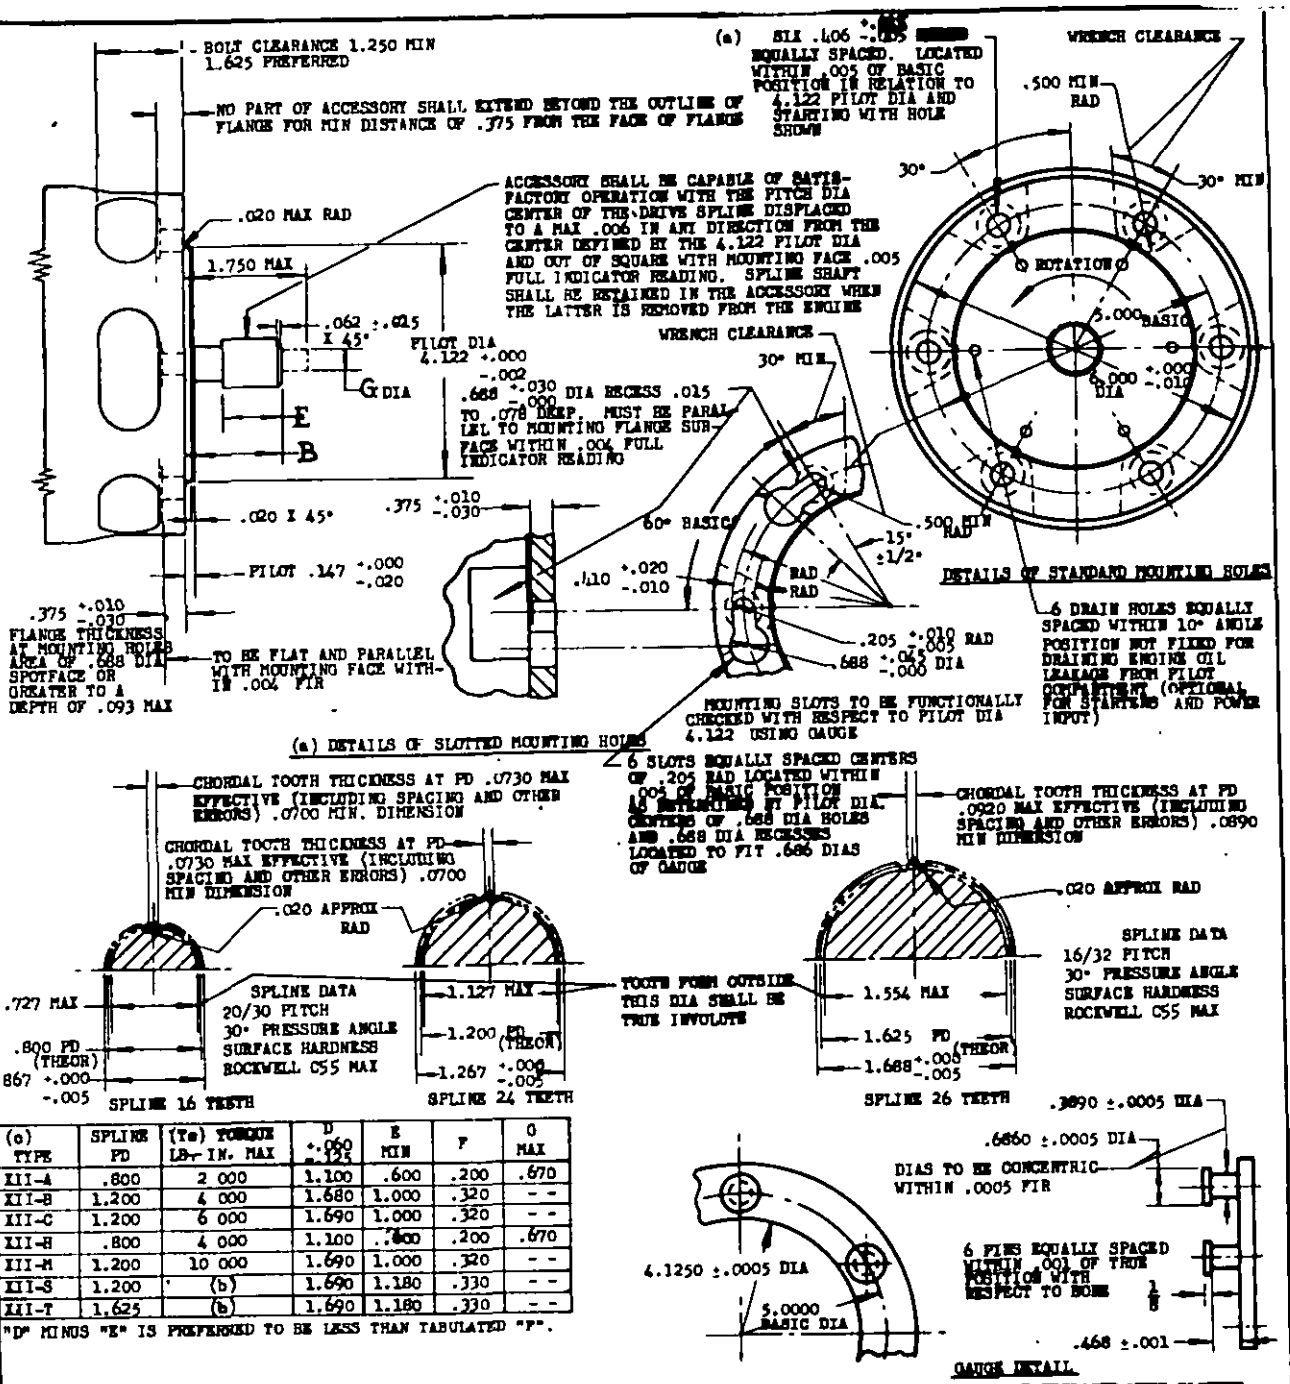


| (a) TYPE | SPLINE PD | (Ts) TORQUE LB-IN. MAX | D +.060 -.125 | E MIN | F | G MAX |
|---|---|---|---|---|---|---|
| XII-A | .800 | 2 000 | 1.100 | .600 | .200 | .670 |
| XII-B | 1.200 | 4 000 | 1.680 | 1.000 | .320 | - - |
| XII-C | 1.200 | 6 000 | 1.690 | 1.000 | .320 | - - |
| XII-H | .800 | 4 000 | 1.100 | .600 | .200 | .670 |
| XII-M | 1.200 | 10 000 | 1.690 | 1.000 | .320 | - - |
| XII-S | 1.200 | (b) | 1.690 | 1.180 | .330 | - - |
| XII-T | 1.625 | (b) | 1.690 | 1.180 | .330 | - - |

"D" MINUS "E" IS PREFERRED TO BE LESS THAN TABULATED "F".

(a) WHEN SPECIFIED IN THE ACCESSORY SPECIFICATION, THE SIX .406 DIA MOUNTING HOLES AND CLEARANCE SHALL BE REPLACED WITH SLOTTED MOUNTING HOLES. DIRECTION OF SLOTS TO BE SELECTED TO OPPOSE THE MAX TORQUE WITH THE .205 RADIUS.
(b) STARTERS SHALL PROVIDE A TORQUE LIMITING DEVICE AS SPECIFIED IN THE STARTER SPECIFICATION.
(c) ACCESSORY FLANGE TYPE NUMBERS APPLY TO ENGINE DRIVE TYPE NUMBERS AS INDICATED ON DRAWING AND10230.
ACCESSORY FLANGE OUTLINE AS DIMENSIONED IS A BASIC MAXIMUM AREA REQUIREMENT.
THE ACCESSORY SHALL OPERATE SATISFACTORILY WITH OIL LEAKAGE FROM THE ENGINE INTO THE PILOT COMPARTMENT NOT EXCEEDING 20C PER HOUR.
ROTATION: CLOCKWISE AS VIEWED FROM OPPOSITE THE DRIVE END.
STRENGTH: THE ACCESSORY SHALL PROVIDE A SHEAR SECTION THAT SHALL FAIL AT A TORQUE BELOW (Ts).
REMOVE ALL BURRS AND SHARP EDGES.
FOR DETAIL OF TYPE XII ENGINE DRIVE SEE AND20002.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.
THIS DRAWING AND THE APPLICABLE ACCESSORY SPECIFICATIONS, TOGETHER COMPLETELY DEFINE THE DESIGN REQUIREMENTS.
NOMINAL USE OF THIS FLANGE FOR STARTERS, GENERATORS, AND POWER INPUT.

(1) ENTIRE DRAWING REVISED.

APPROVED 1 Aug 49 REVISED (1) 4 Mar 53

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD


# AND10262

FLANGE, TYPE XII, ACCESSORY MOUNTING

SHEET 1 OF 2

NOT A PART NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.

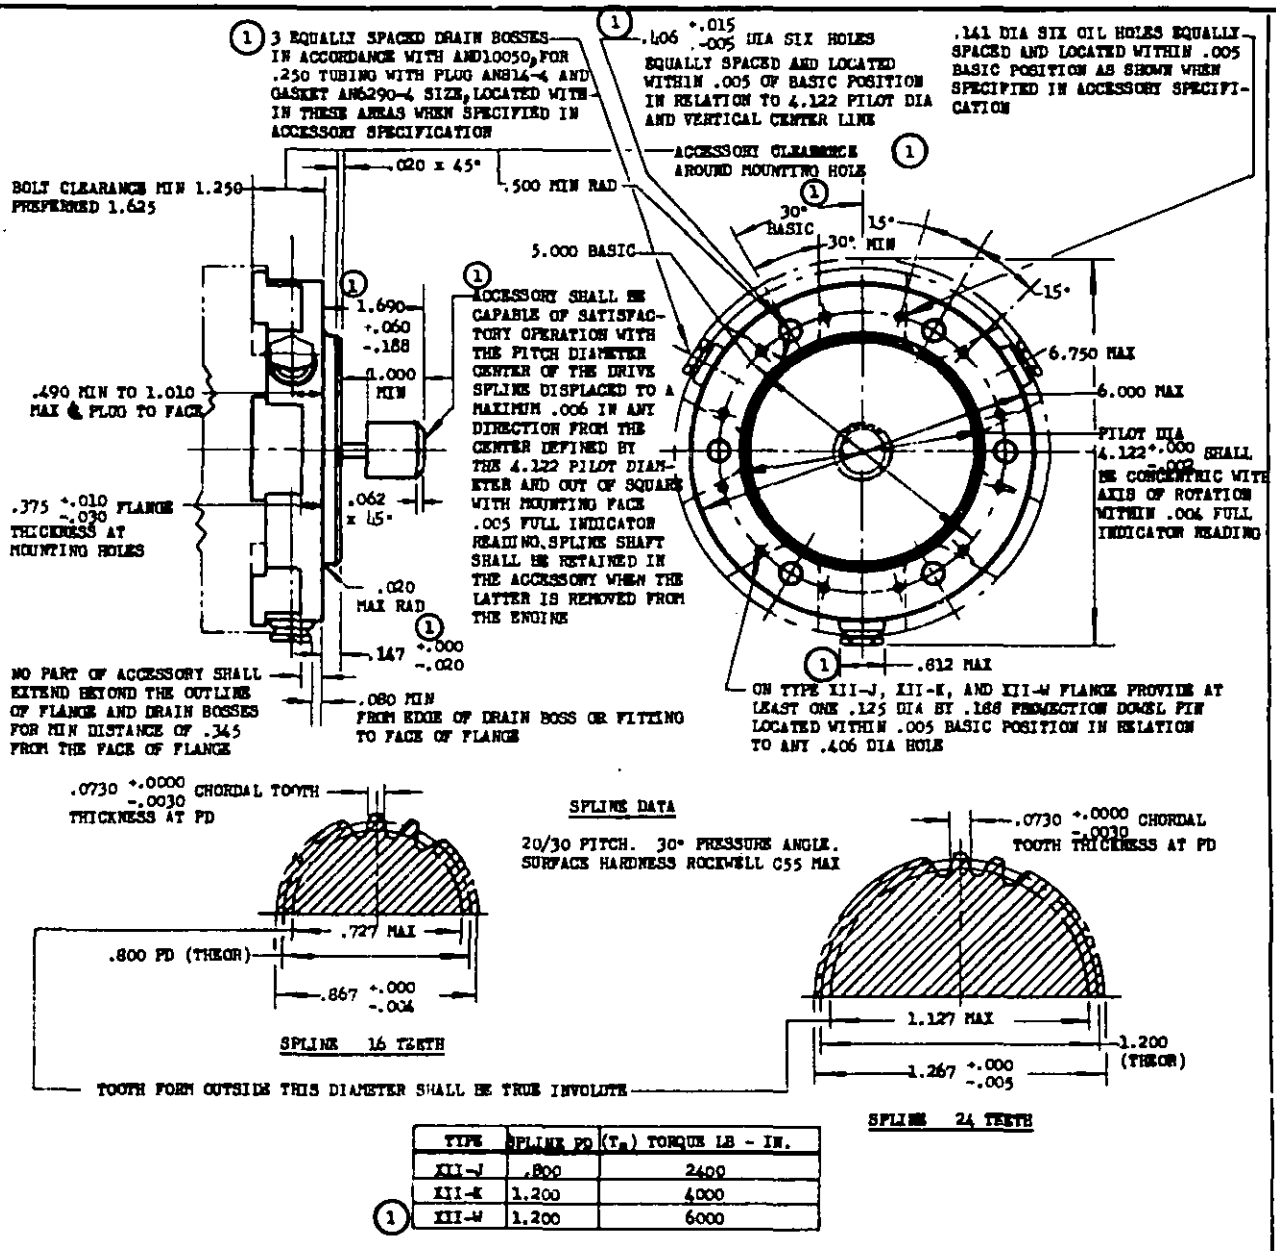


| TYPE | SPLINE PD | ($T_s$) TORQUE LB - IN. |
|---|---|---|
| XII-J | .800 | 2400 |
| XII-K | 1.200 | 4000 |
| 1 XII-W | 1.200 | 6000 |

FLANGE OUTLINE AS DIMENSIONED IS A BASIC MAXIMUM AREA REQUIREMENT.

THE ACCESSORY SHALL OPERATE SATISFACTORILY WITH OIL LEAKAGE FROM THE ENGINE INTO THE PILOT COMPARTMENT NOT EXCEEDING 2 CC PER HOUR. ACCESSORY CONTAINING DRIVE SHAFT SEALS TO PREVENT LEAKAGE OF FLUID FROM THE ACCESSORY SHALL BE PROVIDED WITH DRAIN BOSSES AS SHOWN CONNECTED TO THE PILOT COMPARTMENT BETWEEN THE ENGINE SEAL AND THE ACCESSORY SEAL.

1 WHEN THE ACCESSORY IS OPERATING AT A SPEED OF 1300 TO 4125 RPM THE ENGINE WILL FLOW A MINIMUM OF .25 GPH OF OIL TO ONE OIL HOLE AT A MINIMUM PRESSURE OF 5 PSI AND NOT EXCEEDING 70 PSI IF FLOW IS REDUCED BELOW .25 GPH TO .05 GPH.

1 SPEED: NORMAL RATED SPEED SHALL BE 3750 RPM.

ROTATION: CLOCKWISE AS VIEWED FROM OPPOSITE THE DRIVE END

STRENGTH: THE ACCESSORY SHALL PROVIDE A SHEAR SECTION THAT SHALL FAIL AT A TORQUE BELOW ($T_s$).

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

1 THIS DRAWING AND THE APPLICABLE ACCESSORY SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

FOR DETAIL OF TYPE XII ENGINE DRIVE SEE AND20002.

NORMAL USE OF THIS FLANGE IS FOR LOW SPEED FLUID POWER PUMPS.

APPROVED 1 Aug 49 REVISED 1 4 Mar 53



NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all subsidiary standard drawings for the same product and shall become effective for the procurement of superseded supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-29 14:29:27
Check the source to verify that this is the current version before use.