THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS DESIGN STANDARD AND THE ISSUE OF THE FOLLOWING DOCUMENT LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION NONE

THIS STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188




FIGURE 1




FIGURE 2

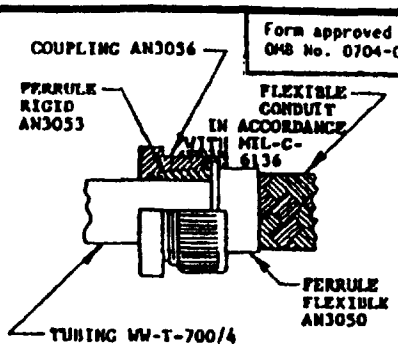


FIGURE 3




FIGURE 4




FIGURE 5




FIGURE 6




FIGURE 7




FIGURE 8




FIGURE 9




FIGURE 10

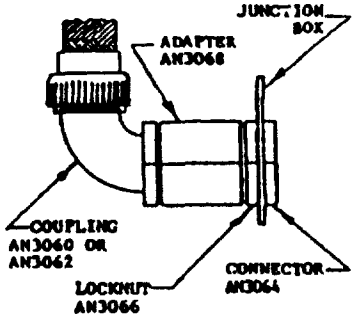


FIGURE 11

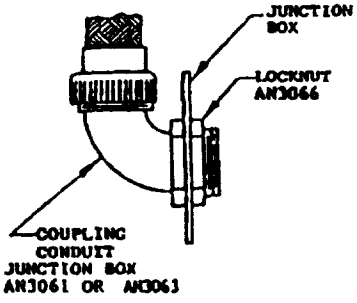


FIGURE 12

④ DENOTES CHANGES

DESIGN STANDARD

PREPARING ACTIVITY NAVY-AS

CUSTODIANS ARMY-ER NAVY-AS

AIR FORCE-85 DLA-

REVIEW

PROJECT NUMBER 5975-N45

AERONAUTICAL DESIGN STANDARD

TITLE

COUPLING INSTALLATIONS STANDARD CONDUIT, ELECTRICAL

AND10380 6 NOV 95 REV 4

SUPERSEDING AND10380 REV 3 12 MAR 90

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT

A Approved for public release; distribution is unlimited

DD FORM 6 / 2 MAY 88 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS DESIGN STANDARD AND THE ISSUE OF THE FOLLOWING DOCUMENT LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION NONE

THIS STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form approved
OMB No 0704-0188

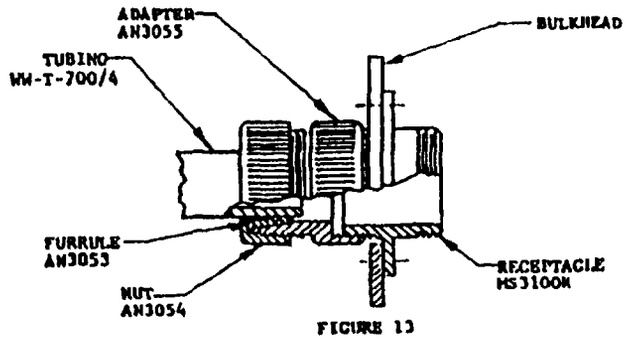


FIGURE 13

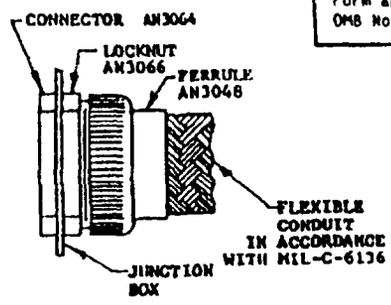


FIGURE 14

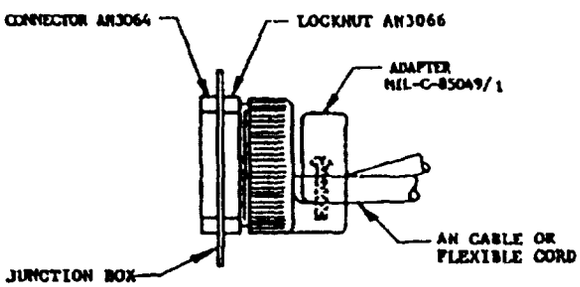


FIGURE 15

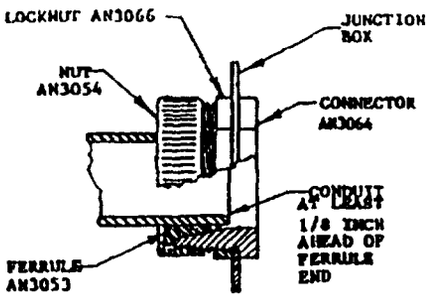


FIGURE 16

REQUIREMENTS:

1. FERRULES SHALL BE CRIMPED TO THE FLEXIBLE CONDUIT BY A SUITABLE PRESS AND MUST BE ABLE TO WITHSTAND A DIRECT PULL OF 50 LB WITHOUT SEPARATING FROM THE CONDUIT.
2. FLEXIBLE CONDUIT AND FERRULES OR RIGID CONDUIT AND FERRULES MAY BE CONNECTED INTERCHANGEABLY, SIZE FOR SIZE, TO ALL COUPLINGS WITH THE EXCEPTION OF THE STRAIGHT BOSS AND10051 TYPE II, WHICH IS ADAPTABLE TO FLEXIBLE CONDUIT ONLY.
3. (4) BEFORE ASSEMBLY IN A CONDUIT INSTALLATION, WIPE COUPLINGS WITH A DRY CLOTH OR SOFT PAPER TOWEL TO REMOVE EXCESS PETROLATUM, THEN DIP IN AN APPROPRIATE CLEANING SOLVENT, SEMI-AQUEOUS, OR AQUEOUS CLEANER ALL CLEANERS SHALL BE COMPATIBLE WITH THE COUPLINGS. ALL PARTS SHALL BE COMPLETELY DRY. PRIOR TO ASSEMBLY AND USE, TREAT ALL THREADED AREAS WITH ANTI-SEIZE COMPOUND CONSISTING OF 50% PETROLATUM AND 50% ZINC DUST BY WEIGHT.
4. CARE MUST BE TAKEN THAT NO SHARP EDGES ARE LEFT ON THE ENDS OF RIGID CONDUIT AND CONDUIT COUPLINGS WHICH MAY CHAFE THE INSULATION OF CABLE AFTER INSTALLATION. ALL SHARP EDGES SHALL BE REMOVED BY REAMING TO A MINIMUM OF 1/16 INCH RADIUS.
5. IN ALL INSTALLATIONS WHERE CONDUIT IS NOT USED, THE CABLE SHALL BE ANCHORED TO THE BOX CONNECTOR WITH MIL-C-85049/1 ADAPTER.

NOTES:

1. THIS IS A DESIGN STANDARD NOT TO USE AS A PART NUMBER.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN
4. CHANGED FSC CLASS FROM "4730" TO "5975".

(4) DENOTES CHANGES

DESIGN STANDARD

PREPARING ACTIVITY NAVY-AS
CUSTODIANS ARMY-ER NAVY-AS
AIR FORCE-85 DLA-
REVIEW
PROJECT NUMBER 5975-1145

AERONAUTICAL DESIGN STANDARD

TITLE
COUPLING INSTALLATIONS, STANDARD CONDUIT, ELECTRICAL

AND10380 6 NOV 95 REV 4

SUPERSEDING AND10380 REV 3 12 MAR 90

AMSC- N/A FSC 5975

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.