MIL-C-20267C(MC)
6 January 1983
SUPERSEDING
MIL-C-20267B(MC)
6 June 1966

MILITARY SPECIFICATION

CARRIER, CLUB, POLICEMAN'S: COTTON WEBBING, OLIVE DRAB (WITH DOUBLE HOOK)

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 SCOPE. This specification covers requirements for one type and size policeman's club carrier made of olive drab cotton webbing.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285	- Thread, Polyester
UU-P-268	- Paper, Kraft, Wrapping
DDD-L-20	- Label; For Clothing, Equipage, And Tentage (General Use)

MILITARY

MIL-W-530	- Webbing, Textile, Cotton, General Purpose, Natural Or In Colors

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters, U. S. Marine Corps, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 202640-19T07:29Z
Check the source to verify that this is the current version before use.

MIL-H-639	- Hooks (For Belts, Straps and Equipage Items)
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, And Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-129	- Marking For Shipment And Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Ths issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 1106 South Riverside Plaza, Chicago, Illinois 60606.)

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Application for copies of the manual should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, D. C. 20026.)

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:29Z
Check the source to verify that this is the current version before use.

Department of Defense (DoD) Standard Color Card of
Official Standardized Shades for Sewing Threads 1968

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article consisting of the number of finished club carriers specified by the procuring activity (see 6.2) shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Webbing, cotton. The webbing shall be 2 inches wide, dyed olive drab shade No. 7, water repellent and mildew-resistant treated, conforming to type III, class 4 of MIL-W-530.

3.3.2 Thread, polyester. The thread shall be size F, 4 ply conforming to type I, class 1, subclass A or type II, class 1, subclass A of V-T-285.

3.3.2.1 Color and colorfastness. The thread shall be dyed olive drab shade S-1 cable No. 66022. (See DoD Standard Color Card of Official Standardized Shades for Sewing Thread, 1968. The dyed thread shall show good fastness to chlorine bleaching, laundering and weathering when tested as specified in V-T-285.

3.3.3 Hook, double, brass, black chemical finish. The hook shall conform to type I, class 1 of MIL-H-639.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:29Z
Check the source to verify that this is the current version before use.

3.3.4 Label. Each club carrier shall have an identification label with the item nomenclature, contract number and stock number. The label shall conform to type IV, class 5 of DDD-L-20, and shall be located on the back of the club carrier. The item nomenclature shall be Carrier, Club, Policeman's: OD.

3.4 Design. The club carrier shall be the U.S. Marine Corps design shown in Figure 1. The club carrier shall have double hooks and webbing stitched to accommodate the club.

3.5 Construction. The construction shall conform in all respects to Figure 1 and as specified herein. The club carrier shall be manufactured in accordance with the requirements specified herein. The supplier is not required to follow the exact sequence of operations, but all operations specified shall be used to manufacture the club carrier.

3.5.1 Stitches, seams and stitchings. Stitches, seams and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.5.1.1 Backstitching. Thread breaks in stitching shall be backstitched not less than 1 inch at each break. Stitching shall be backstitched not less than 1/2 inch at the ends, except where ends are held down by other stitchings. Thread tension shall be maintained so that there will be no loose stitching and that the lock will be embedded in the center of the materials sewed. All thread ends shall be trimmed.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:29Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. Cut 2-inch webbing to proper lengths for component parts, one body part 9 ± 1/8 inches long and one carrier part 9-3/4 ± 1/8 inches long.					
2.	Fold and stitch body part. a. Fold one end of body part widthwise 3-3/8 ± 1/8 inches and insert the double hook in the fold, facing to the front. b. Stitch the two plies together as close as possible to the double hook in the fold, with three rows of stitches as close as possible but not on top of stitches.	301	OSf-3	6-8	F/4	F/4
3.	Fold and stitch carrier part. Fold carrier part widthwise in half and stitch the two plies together with three rows of stitches as close as possible but not on top of stitches 2-3/8 ± 1/8-1/16 inches from the folded end forming a loop.	301	OSf-3	6-8	F/4	F/4
4.	Assemble the carrier and body part. a. Turn up the long end of the body part and butt to short end. b. Position the carrier loop on the front of the body part with both ends spread open and the lower edge of the loop even with the lower edge of body part, and with the ends of loop inserted in the body part. c. Stitch the loop to the body part through all plies with two rows of stitches as close as possible to the loop. Continue to stitch around the edges, forming a box type stitch as shown in Figure 1.					

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:29Z
Check the source to verify that this is the currentversion before use.

3.6 Finished measurements. The finished club carrier shall conform to the measurements shown in Figure 1.

3.7 Workmanship. The finished club carrier shall conform to the quality of the product established by this specification. The occurrence of defects other than selected major defects shall not exceed the limits established by the applicable acceptable quality level (AQL).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated club carrier for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

4.5.2 End item sampling examination. As a final step in the contractor's production control plan, before formation of the lot, each carrier shall be examined on an inspection table. After formation of the lot, the club carrier shall be examined for the defects listed in 4.5.2.1 and 4.5.2.2. AQL's shall be as indicated in 4.5.2.3. The sample unit shall be one club carrier.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:29Z
Check the source to verify that this is the currentversion before use.

4.5.2.1 General Defects. - General Defects shall be classified as follows:

Examine	Defect	Classification		
		Major	Minor	
			A	B
Webbing	a. Holes, cuts or tears.	X		
	b. Other webbing defects, such as abrasion, slub, smash, broken end or pick:			
	-seriously affecting serviceability or appearance.	X		
	-affecting serviceability or appearance but not seriously.			X
	c. Edges frayed or scalloped; not firmly or tightly woven.	X		
	d. Broken or malformed; finish omitted; corroded areas; burrs or sharp edges which may cause injury in handling.	X		
Seams and stitching	Open seams:			
	- Less than 1/2 inch.		X	
	- 1/2 inch or more.	X		
NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double or triple stitched seams, a seam shall be considered open when one or more sides of a seam are open.				
Run-offs (see open seams)				
Seam and types	Wrong seam or stitch type.	X		
Stitch tension	Loose, resulting in a loosely exposed top or bobbin thread; tight, resulting in excessive tightness of webbing on seams.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:29Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
Stitches per inch	a. One to two stitches less than minimum specified.		X	
	b. Three or more stitches less than minumum specified.	X		
	c. One or more stitches in excess of maximum specified.		X	
NOTE: Variation in the number of stitches per inch, caused by the operator's speeding up the machine and pulling the fabric in order to sew over heavy seams or heavy places, shall be classified as follows: (a) Within the major defect classification - Minor defect (b) Within the minor defect classification - No defect				
Stitching margin; stitching gage	Not as specified, affecting serviceability or appearance.		X	
Stitching ends	Backstitched less than 1/2 inch.		X	
Thread breaks	Backstitched less than 1 inch.			X
NOTE: Thread breaks not backstitched shall be classified as open seams.				
Components and assembly	a. Any component part omitted or not as specified; any required operation omitted (unless otherwise indicated herein).	X		
	b. Any required row of stitching omitted: -seriously affecting serviceability.	X		
	-affecting serviceability but not seriously.			X

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:29Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	c. Boxstitching less than specified dimension by 1/8 or more.		X	
	d. Needle chews.	X		
	e. Mends or darns.	X		
Marking	Omitted, illegible, incorrect, misplaced or not as specified.		X	
Cleanness	a. Grease or oil stains, clearly noticeable.	X		
	b. Spots or dirt marks:			
	-seriously affecting appearance.	X		
	-affecting appearance but not seriously.		X	
	c. Thread ends not trimmed throughout.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:29Z
Check the source to verify that this is the current version before use.

4.5.2.2 Size measurements. Any measurement deviating from the normal dimensions and tolerances specified in Figure 1 shall be scored as a defect.

4.5.2.3 Inspection levels and AQL's. The inspection levels and AQL's, expressed in defects per hundred units (DHU), shall be as follows:

Examination	Inspection level	AQL
For defects applicable to 4.5.2.1, visual characteristics.	II	Major 2.5 Total 6.5
For defects applicable to 4.5.2.2, dimensional characteristics.	S-3	One 6.5 class

4.5.2.4 Examination of packaging. An examination shall be made to determine that packaging, packing, amd marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any nonconforming component; component missing, damaged, or otherwise defective, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Weight or content (exterior and interior)	Number per container is more or less than required; gross/net weight exceeds requirement.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:29Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Ten club carriers shall be neatly stacked in a bundle and securely tied across the width and length at the centers with strong twine or cotton tape.

5.1.2 Commercial. The club carriers shall be packaged in accordance with good commercial practice.

5.2 Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Twelve bundles of club carriers, packaged as specified in 5.1.1, and five loose carriers (125 club carriers total) shall be packed in a fiberboard shipping container with liner conforming to class weather-resistant, size No. 1A of MIL-B-17757. The contents of the container shall be covered on top and bottom with 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Shipping containers shall be assembled, closed and reinforced as specified in the appendix thereto.

5.2.1.2 Method 2. When specified (see 6.2), twelve level B shipping containers (1500 club carriers) shall be overpacked in a fiberboard shipping container conforming to class weather-resistant, size No. 4 of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix to the box specification.

5.2.2 Level B. Club carriers shall be packed as specified in 5.2.1.1 except that the shipping container shall conform to class-domestic, size No. 1A of MIL-B-17757. The container and liner shall be fabricated from grade 275.

5.2.3 Commercial. Club carriers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification and U. S. Postal Service Manual or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the shipping containers shall be marked in accordance with requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The club carrier is intended to be worn on the M-1936 olive drab web pistol belt to accommodate the military policeman's M-1944 black club.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:29Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) Whether first article is required (see 3.2).
(c) Number of carriers in first article (see 3.2).
(d) Selection of applicable level of packaging and packing (see 5.1 and 5.2).
(e) When level A, method 2, packing is required (see 5.2.1.2).

6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on DD Form 1423 included in the contract.

6.3 Sample and shade sample. For information regarding the availability of standard sample club carriers and standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 Figures. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

6.5 Marginal notations. Astericks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing Activity
Navy-MC
Project No. 8465-N833

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:29Z
Check the source to verify that this is the currentversion before use.

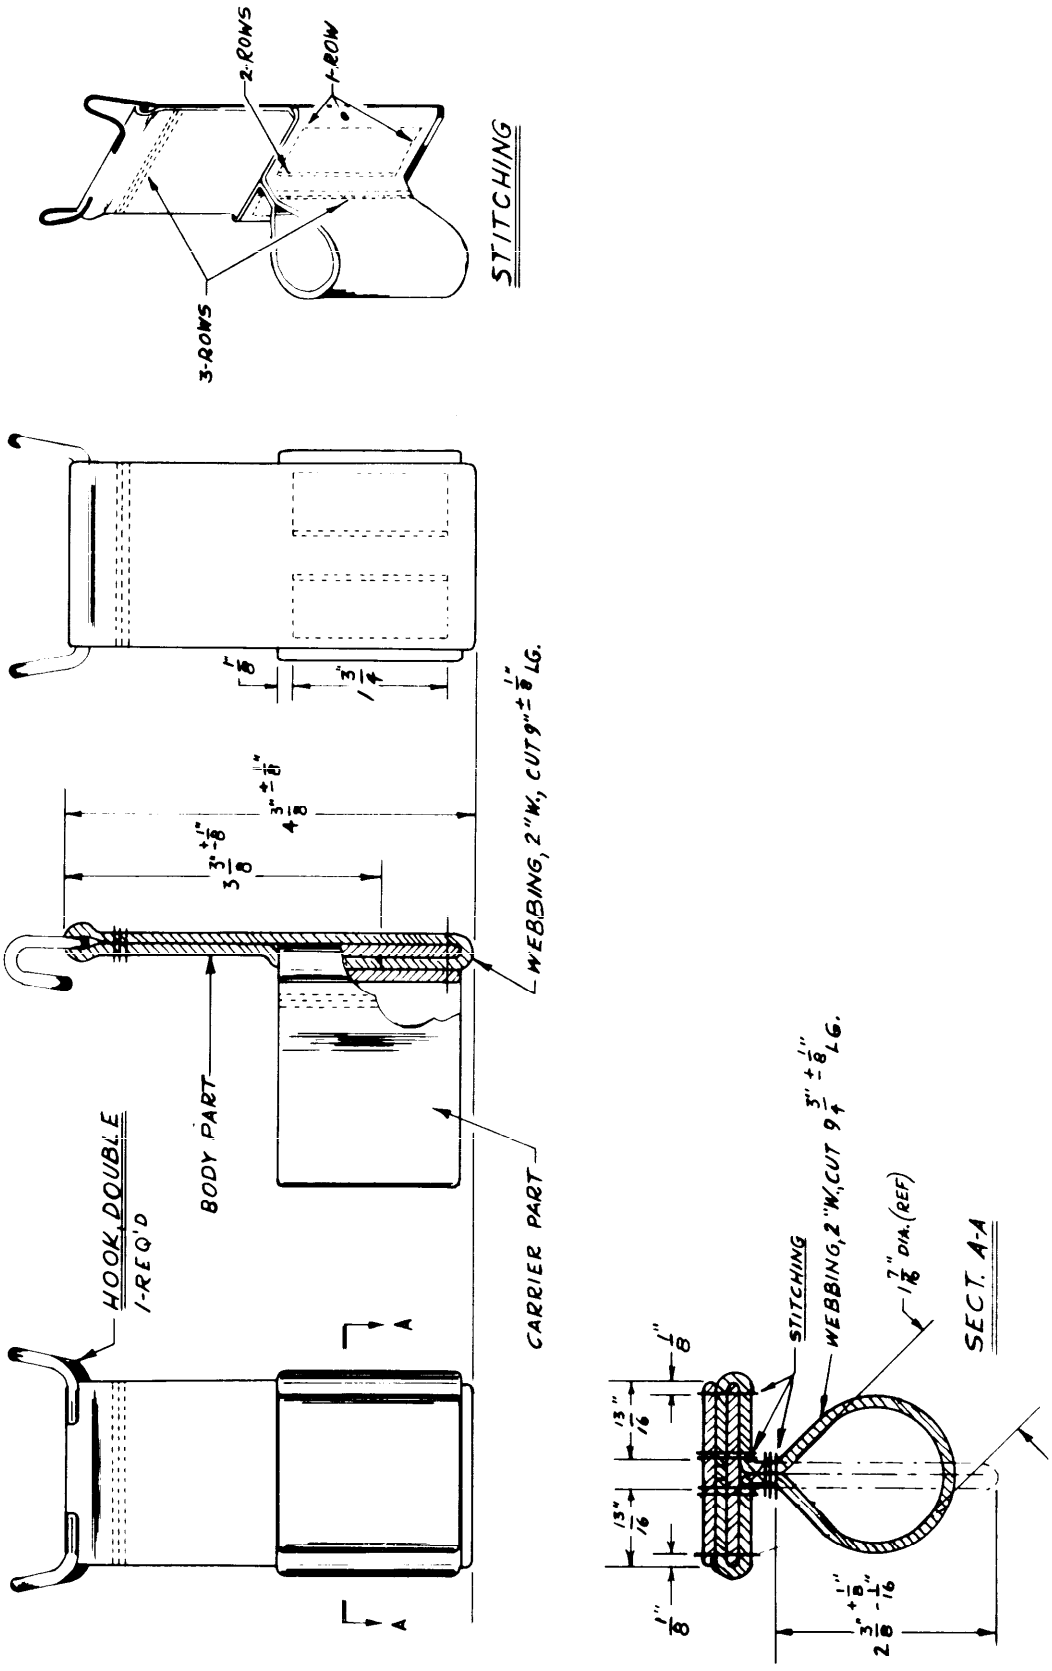


FIGURE 1. CARRIER, CLUB, POLICEMAN'S, COTTON WEBBING (OD)

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE	
MIL-C-20267C(MC)	CARRIER, CLUB, POLICEMAN'S: COTTON WEBBING, OLIVE DRAB, (WITH DOUBLE HOOK)

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-LF-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:29Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
HEADQUARTERS, U. S. MARINE CORPS
WASHINGTON, D.C. 20380

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD-317

U.S.MAIL

Commandant of the Marine Corps
Headquarters, U.S. Marine Corps
Code LMA-1
Washington, D.C. 20380

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:29Z
Check the source to verify that this is the current version before use.