
User activities: Army - ME, AM, AP
Navy - MC
Air Force -

Review activities: Army - MI, AT
Navy - AS
Air Force - 11, 99
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

FED. SUP CLASS
5935

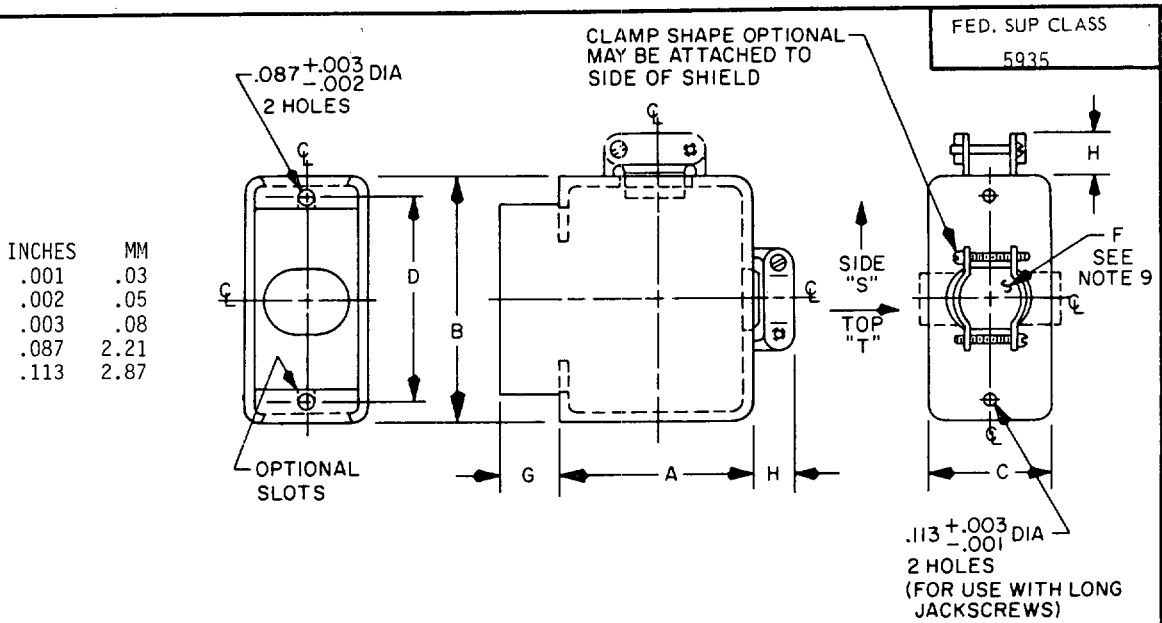

INCHES	MM
.001	.03
.002	.05
.003	.08
.087	2.21
.113	2.87

	MS 1/ PART NO.	CONN. SIZE	A MAX MIN	B	C	D ±.015 (.38)	F MIN CABLE OPENING	G ±.05 (1.3)	H MAX
(A)	MS14071-1T	4	.760 (19.30) .620 (15.75)	.780 (19.81)	.268 (6.81)	.562 (14.27)	.027 (.69)	.20 (5.1)	.300 (7.62)
(A)	-2T	7	.760 (19.30) .620 (15.75)	.780 (19.81)	.268 (6.81)	.562 (14.27)	.027 (.69)	.20 (5.1)	.300 (7.62)
	-3T -3S	14	.760 (19.30) .620 (15.75)	.875 (22.22)	.348 (8.84) .334(8.48) ±.030 (.76)	.625 (15.88)	.07 (1.8) .037 (.94)	.20 (5.1)	.350 (8.89)
	-4T or -4S	20	.760 (19.30) .620 (15.75)	1.064 (27.03)	.348 (8.84)	.814 (20.68)	.081 (2.06)	.215 (5.46)	.350 (8.89)
	-5T or -5S	26	.760 (19.30) .620 (15.75)	1.250 (31.75)	.348 (8.84)	1.000 (25.40)	.089 (2.26)	.20 (5.1)	.400 (10.16)
(A)	-6T or -6S	34	.760 (19.30) .620 (15.75)	1.250 (31.75)	.452 (11.48)	1.032 (26.21)	.11 (2.8)	.20 (5.1)	.400 (10.16)
	-7T or -7S	44	1.20 (30.5) MAX	1.50 (38.1)	.452 (11.48)	1.281 (32.54)	.16 (4.1)	.215 (5.46)	.500 (12.70)
	-8T or -8S	50	1.52 (38.1) MAX	1.625 (41.28)	.452 (11.48)	1.408 (35.76)	.17 (4.3)	.215 (5.46)	.500 (12.70)

1/ For shield with top cable opening suffix part No. with 'T'. For shield with side cable opening suffix part No. with 'S'.

(A) DESIGN STANDARD FOR USE WITH MIL-C-28748 CONNECTORS

APPROVED 3 APR 78
REVISED (A) 1 MAY 1986

P.A Navy - EC Other Cust AF - 85 Army - CR(A)	International interest	TITLE (A) SHIELD, ELECTRICAL CONNECTOR FOR 7, 9, 14, 20, 26, 34, 44 and 50 CONTACT CONNECTORS	MILITARY STANDARD MS14071
Procurement Specification MIL-C-28748		SUPERSEDES:	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
AMSC N/A

5935-3535

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
5935

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm).
3. Metric equivalents are given for general information only.
4. Metric equivalents are in parentheses.
5. Material: Aluminum alloy, per specification QQ-A250/8, temper H32, .032 (.81 mm) thick.
6. Finish: Anodize per specification MIL-A-8625, type I or type II.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Edges of cable entry hole to be rounded to prevent insulation chafing.
10. Shield supplied on connector which also has protective shell must be without aprons.

User activities: Army - ME, AM, WC
Navy - MC
Air Force -

Review activities: Army - MI, AT
Navy - AS
Air Force - 11, 80
DLA - ES

APPROVED 3 APR 78

REVISED A FOR CHANGES SEE PAGES 1 & 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

DESIGN STANDARD FOR USE WITH MIL-C-28748 CONNECTORS

P.A Navy - EC Other Cust AF - 85 Army - CR (A)	International interest	TITLE (A) SHIELD, ELECTRICAL CONNECTOR FOR 7, 9, 14, 20, 26, 34, 44 and 50 CONTACT CONNECTORS	MILITARY STANDARD MS14071
Procurement Specification MIL-C-28748		SUPERSEDES:	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.