military standard has been approved by the Department of Defense and is mandatory for ...y all Departments and Agencies of the Department of Defense. Selection for all new ...eering and design applications and for repetitive use shall be made from this document.

Review... ...ser information is current as of the date of this document. For future coordination of ...ges to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
AF (a) 14, 19+11, 17, 85 Army (a) MO+ EL, MI, MU Navy (a) MC, CG+SH, AS, OS


P A NAVY-SH | International Interest
Other Cust ARMY-EL AF-11
Procurement Specification MIL-C-22992
SUPERSEDES

(B) ENTIRE STANDARD REVISED (Project 5935-1355-13)

TITLE CONNECTOR, RECEPTACLE, DUMMY STOWAGE

MILITARY STANDARD
MS18062
SHEET 1 OF 2

FED SUP CLASS 5935

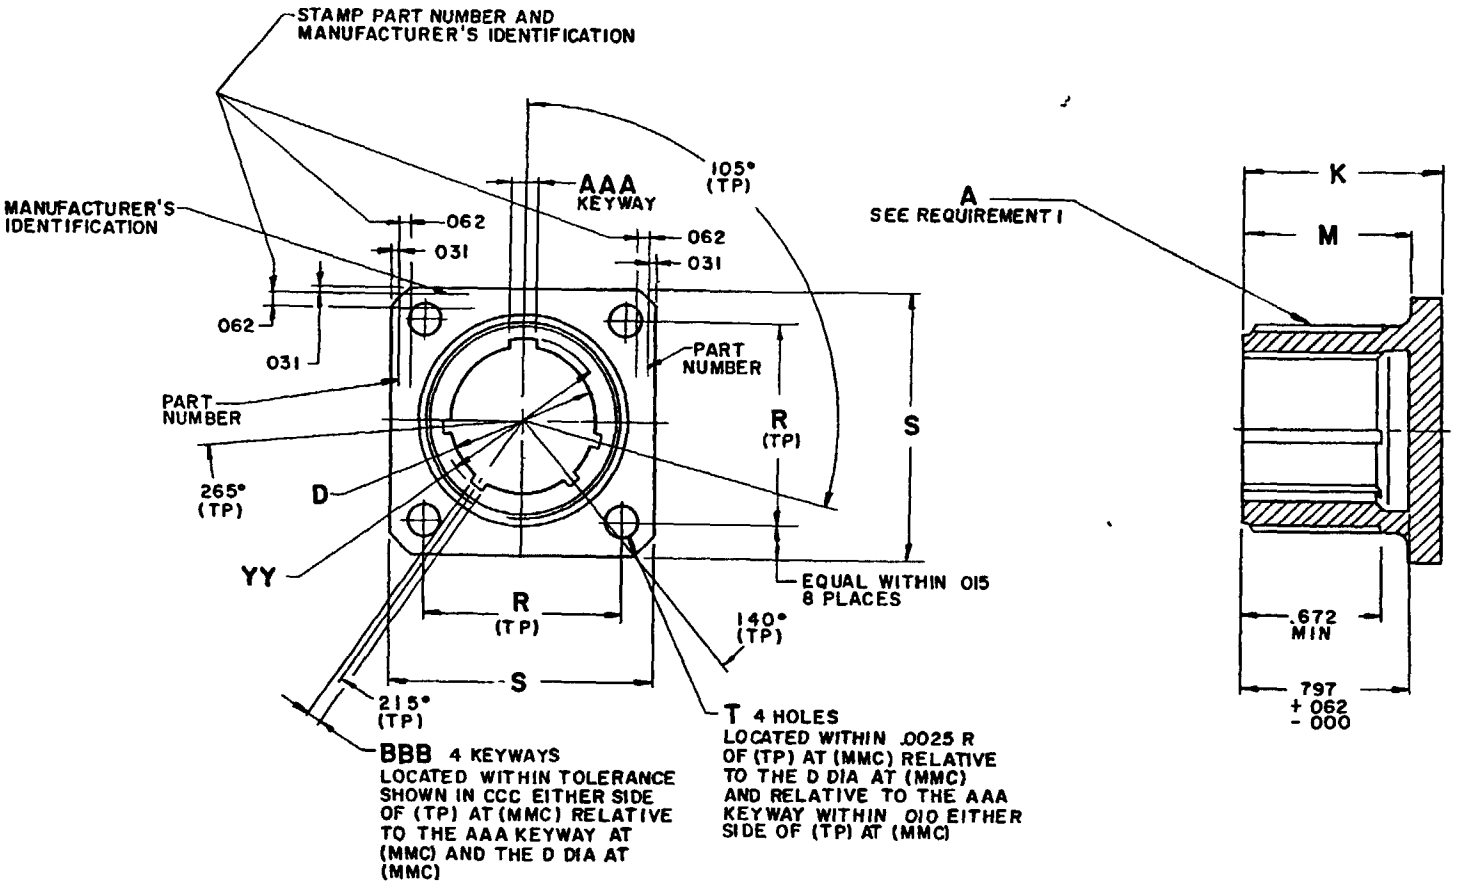

APPROVED 1 JULY 1963 REVISED (A) 1 MAY 1964 (B) 1 JUNE 1966

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.


Military standard has been approved by the Department of Defense and is mandatory for y all Departments and Agencies of the Department of Defense. Selection for all new eering and design applications and for repetitive use shall be made from this document.

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
Navy
AF
Army

FED SUP CLASS
5935

SIZE	A THREAD (PLATED) CLASS 2A	D DIA +.005 -.010	K ±.021 -.010	M +.010 -.000	R (TP)	S +.021 -.020	T DIA ±.005	YY DIA +.010 -.006	AAA	BBB	CCC
12	.8750-0 IP-0 2L-DS	.567	.938	.797	.906	1.188	.150	.647	.126 +.007 -.001	.063 +.007 -.001	.0035
14	1.0000-0 IP-0 2L-DS	.692	.938	↑	.969	1.281	.150	.772	.126 +.007 -.001	.063 +.007 -.001	.0035
16	1.1250-0 IP-0 2L-DS	.817	.938	↓	1.062	1.375	.150	.897	.182 +.010 -.001	.108 +.010 -.001	.0070
18	1.2500-0.IP-0 2L-DS	.942	.953	↑	1.156	1.500	.177	1.022	↑	↑	↑
20	1.3750-0 IP-0 2L-DS	1.068	.953	↓	1.250	1.625	↑	1.148	↓	↓	↓
22	1.5000-0 IP-0 2L-DS	1.192	.953	.797	1.375	1.750	↓	1.272	.182 +.010 -.001	.108 +.010 -.001	↓
24	1.7500-0.IP-0 2L-DS	1.317	1.047	.859	1.562	2.000	↑	1.473	.260 +.010 -.001	.155 +.010 -.001	↑
28	2.0000-0.IP-0.2L-DS	1.536	1.047	.859	1.750	2.250	.177	1.692	↑	↑	↓
32	2.2500-0 IP-0 2L-DS	1.786	1.110	.922	1.938	2.500	.209	1.942	↓	↓	↑
36	2.5000-0.IP-0 2L-DS	2.005	1.110	.922	2.188	2.750	.209	2.161	↑	↑	↓
40	2.7500-0.IP-0 2L-DS	2.255	1.110	.922	2.375	3.000	.209	2.411	.260 +.010 -.001	.155 +.010 -.001	.0070

REQUIREMENTS:
1. Mates with plug shown on standard MS17344.
2. Shell finish shall be designated by the letter C (conductive) or N (non-conductive).
3. The part number shall include finish and size as shown in the example below.



NOTES:
1. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
2. Referenced documents shall be of the issue in effect on date of invitations for bid.
3. All dimensions are in inches. Unless otherwise specified, tolerance is ±.016.

APPROVED 1 JULY 1963 REVISED (B) ENTIRE STANDARD REVISED

P A NAVY-SH Other Cust ARMY-EL AF-11	International Interest	TITLE CONNECTOR, RECEPTACLE DUMMY STOWAGE	MILITARY STANDARD MS18062
Procurement Specification MIL-C-22992		SUPERSEDES:	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.