
This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army AV, ME
Navy MC, SH
Air Force

Reviewer activities: Army EL, MU
Navy AS, SH
Air Force 11, 80
DSA-GS

FED. SUP CLASS
6240

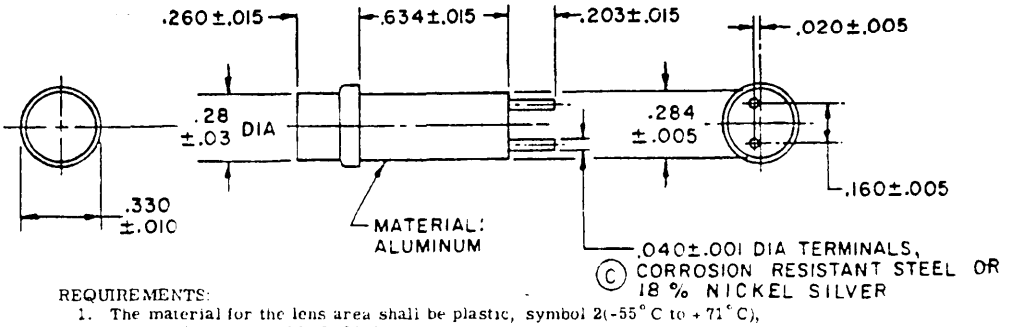

REQUIREMENTS:

1. The material for the lens area shall be plastic, symbol 2(-55° C to +71° C), in accordance with MIL-L-3661.
2. The lens face shall be suitable to accept legends.
3. Marking - Marking shall be in accordance with MIL-L-3661 and as follows:

Example: MS18235-1RT-6.3V

- Color
- Transmittance
- Design Volts

Color, transmittance and design volts may be marked on the lamp cartridges at the option of the manufacturer. The complete part number shall be marked on the unit package.

4. The lamp cartridges shall be capable of mating with indicator-light housings, styles LH 87 of MIL-L-3661/45 and LH 90/1 and LH 90/2 of MIL-L-3661/48.
5. Aluminum shall be finished as specified in MIL-L-3661.
6. Lens color shall be as specified in MIL-L-3661.

MS part number	Design volts	Design current (amps)	Candle power (lamp)	Lens color	Lens transmittance	Lamps industry number
MS18235-1RT	6.3	.20	.40	Red	Translucent	2181
MS18235-1GT	6.3	.20	.40	Green	Translucent	2181
MS18235-1YT	6.3	.20	.40	Yellow	Translucent	2181
MS18235-1BT	6.3	.20	.40	Blue	Translucent	2181
MS18235-1WT	6.3	.20	.40	White	Translucent	2181
MS18235-1CN	6.3	.20	.40	Colorless	Nondiffusing	2181
MS18235-2RT	14	.08	.30	Red	Translucent	2182
MS18235-2GT	14	.08	.30	Green	Translucent	2182
MS18235-2YT	14	.08	.30	Yellow	Translucent	2182
MS18235-2BT	14	.08	.30	Blue	Translucent	2182
MS18235-2WT	14	.08	.30	White	Translucent	2182
MS18235-2CN	14	.08	.30	Colorless	Nondiffusing	2182
MS18235-3RT	28	.04	.30± 25%	Red	Translucent	2187
MS18235-3GT	28	.04	.30± 25%	Green	Translucent	2187
MS18235-3YT	28	.04	.30± 25%	Yellow	Translucent	2187
MS18235-3BT	28	.04	.30± 25%	Blue	Translucent	2187
MS18235-3WT	28	.04	.30± 25%	White	Translucent	2187
MS18235-3CN	28	.04	.30± 25%	Colorless	Nondiffusing	2187

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Referenced documents shall be of the issue in effect on date of invitation for bid.
4. For design feature purposes, this standard takes precedence over documents referenced herein.
5. Hot stamped or engraved lamp cartridges shall not be used. Lamp failure requires replacement of the lamp with another which has identical marking. As a result, spares must be kept on hand to reduce replacement procurement time. Lenses LC 31 or LC 32, in accordance with MIL-L-3661 31 or MIL-L-3661/32, shall be used when legends are required. A colorless face lamp, in accordance with MS 18235 - 1CN, 2CN, or 3CN, shall be used for this type of application.

INCHES	MM	INCHES	MM
.001	.03	.160	4.06
.003	.13	.203	5.16
.010	.25	.260	6.60
.015	.38	.28	7.11
.020	.51	.284	7.21
.03	.76	.330	8.38
.040	1.02	.634	16.10

© DENOTES CHANGE

REVISED (A) 14 APRIL 1969 (B) 4 June 1971 (C) 13 January 1976

APPROVED 27

P.A. EC	International interest	TITLE Lamp, cartridge, short cylindrical, plug-in, incandescent, plastic (flat lens type)	MILITARY STANDARD
Other Cust EL 82			MS 18235
Procurement Specification		SUPERSEDES:	SHEET 1 OF 1

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

6240- 0303

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:17Z
Check the source to verify that this is the current version before use.