DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection by all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

REVIEWER SYMBOLS: ARMY - AV, NAVY - EC, USAF - 82

USER SYMBOLS:

FED. SUP CLASS
6240

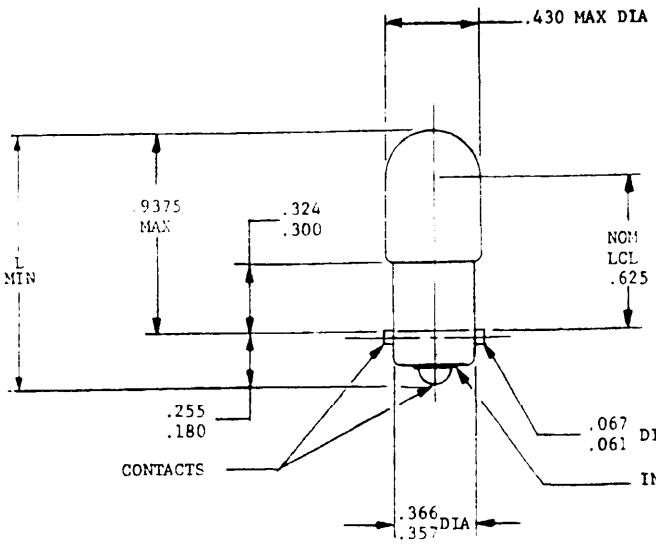

INCH	mm
.025	0.64
.033	0.84
.061	1.53
.067	1.70
.180	4.57
.255	6.48
.300	7.62
.324	8.24
.357	9.07
.366	9.30
.430	10.92
.625	15.88
.9375	23.80
1.088	27.63

(F)

DASH NO AND TRADE NO	TYPE PER MIL-L-6363	L MIN (SEE NOTE 3)	DESIGN POTENTIAL (VOLTS)	DESIGN CURRENT (AMPERES)	COLOR OF BULB	LIGHT OUTPUT (SPHERICAL) CANDLEPOWER	AVERAGE LIFE AT DESIGN VOLTS (HOURS)	SUPERSEDES MS15571	SUPERSEDES AN3121
-313	I	---	28	.17	CLEAR	3.36 ± 35%	500	-4	-313
-313R	I	---			RED	0.4 APPROX			-313R
-313S	I	1.088			CLEAR	3.36 ± 35%			
-316	I	---	6	.70	CLEAR	3.5 ± 25%			
-316R	I	---			RED	0.4 APPROX			
-316S	I	1.088			CLEAR	3.5 ± 25%			
-1819	I	---	28	.04	CLEAR	0.36 ± 35%	1000	-6	-1819
-1819R	I	---			RED	0.04 APPROX			
(F) -1819S	I	1.088			CLEAR	0.36 ± 35%			
-1829	I	---		.07	CLEAR	1.1 APPROX			
-1873	I	---	28	.20	CLEAR	3.0 ± 25%	2500		

REQUIREMENTS:
1. THE ENVELOPE NEED NOT HAVE THE SHAPE SHOWN, BUT THE ENVELOPE, INCLUDING ANY COATING THEREON, SHALL BE CONTAINED WITHIN THE OUTLINE SHOWN.
2. THE DASH NUMBER OF THE LAMP, AND THE MANUFACTURER'S TRADEMARK OR AN ABBREVIATION OF THE MANUFACTURER'S NAME, SHALL BE MARKED ON THE BASE OF EACH LAMP.
3. REQUIREMENTS HEREON SHALL BE MET WITH THE DESIGN VOLTAGE LISTED ABOVE, EITHER DC OR 400 ± 20 HERTZ, APPLIED TO THE CONTACTS OF THE LAMP.
4. LIGHT EMITTED BY RED LAMPS SHALL CONFORM TO MIL-C-25050 FOR AVIATION RED EXCEPT THAT IT SHALL NOT BE PALER OR YELLOWER THAN NBS NO. 3215 FILTER. THE COLOR MAY BE ATTAINED BY EITHER COLORED GLASS OR A COATING ON THE GLASS.

NOTES:
1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS (TO THE NEAREST .01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25 ... mm.
3. 313S, 316S AND 1819S LAMPS ARE INTENDED FOR SPECIAL APPLICATION IN MS25331 PRESS-TO-TEST INDICATOR LIGHT ASSEMBLIES WHICH REQUIRE MINIMUM LAMP LENGTH SHOWN FOR PROPER OPERATION.

*CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (ASCC 12/2 AND STANAG 3544). WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

FOR DESIGN PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(F) DENOTES CHANGES

APPROVED 27 Mar 57 — REVISED (A) 10 Apr 59 (B) 30 Apr 63 (C) 13 Jun 69 (D) 17 Sep 71 (E) 31 Aug 84 (F) 23 Aug 1985

P.A. NAVY — AS Other Cust ARMY - ME USAF - 99	TITLE: LAMPS, INCANDESCENT, CENTER CONTACT, MINIATURE BAYONET BASE (T-3-1/4 BULB)	MILITARY STANDARD MS25231
PROCUREMENT SPECIFICATION: MIL-L-6363	SUPERSEDES: AN3121, MS15571 (IN PART)	SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. — PLATE NO. 85086

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.