

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

REVIEWER: AIR FORCE - 82


FED SUP CLASS
6150

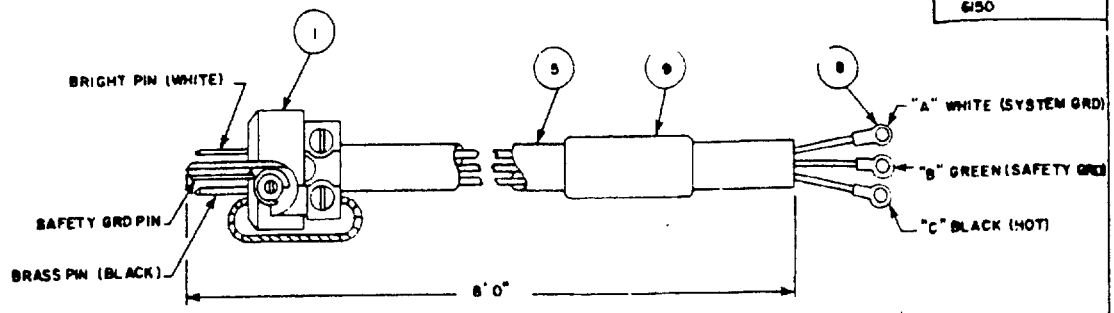



MS27603-1, 60 Hz, 115 V, 1ϕ

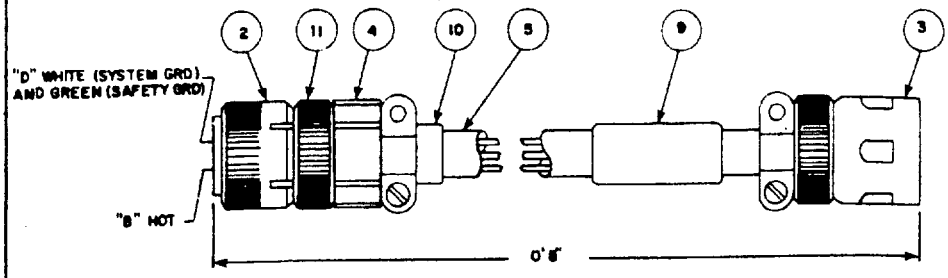


MS27603-2, ADAPTER, 400 Hz, 115 V, 1ϕ

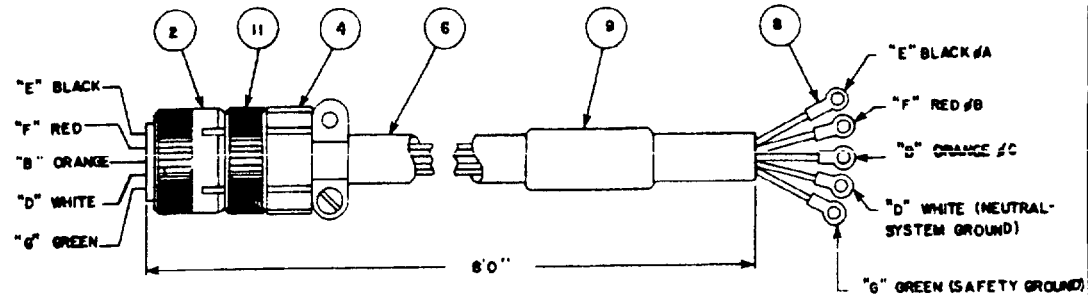


MS27603-3, 400 Hz, 115/200 V, 3ϕ

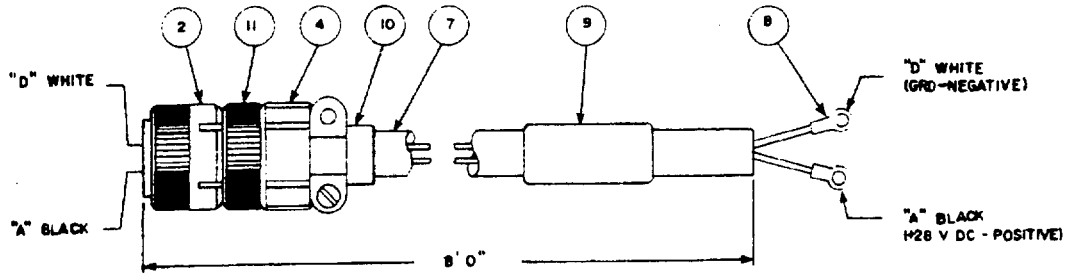


MS27603-4, 28 V DC

PART (11)-BOX CONNECTOR (ADAPTER): UNNECESSARY DUE TO UP-DATED CONNECTOR PARTS.

INACTIVE FOR NEW DESIGN. FOR NEW DESIGN USE MIL-T-28800. (B) CANCELLED AS OF 12 NOV 87

APPROVED 13 JUL 1970 REVISED (A) 23 August 1983 (B) 12NOV87

| | | |
|---|---|---|
| P.A AIR FORCE - 11<br>Other Cust | CABLE ASSEMBLIES, POWER, ELECTRONIC TEST EQUIPMENT, 10 AMPS MAX. | MILITARY STANDARD<br>MS 27603 (USAF) |
| PROCUREMENT SPECIFICATION<br>MIL-T-21200 | SUPERSEDING<br>MS21993 (ASG) FOR AIR FORCE USE | SHEET 1 OF 2 |

DD FORM 672-1

Project 6150-F211

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6150

| ITEM | DESCRIPTION | PART | SPECIFICATION |
|---|---|---|---|
| 1 | CONNECTOR, PLUG (PIVOTED GROUNDING BLADE), POLARIZED | 7545315 | MIL-C-3767 |
| 2 | CONNECTOR, PLUG | MS3456L18-9P | MIL-C-5015 |
| 3 | CONNECTOR, THREE WIRE CORD | WC596/14-2 | W-C-596 |
| 4 | CLAMP, CABLE, ELECTRICAL CONNECTOR | MS3417-18N | |
| 5 | CABLE, PORTABLE POWER | CO-03MGF(3/14) 0430 | MIL-C-3432 |
| 6 | CABLE, PORTABLE POWER | CO-05MGF(5/14) MIL-C-3432-0610 | MIL-C-3432 |
| 7 | CABLE, PORTABLE POWER | CO-02MGF(2/14) 0400 | MIL-C-3432 |
| 8 | TERMINAL | MS25036-108 | MIL-T-7928 |
| 9 | CABLE MARKING IDENTIFICATION | | SEE NOTE 10 |
| 10 | BUSHING | MS3420-10 | |

NOTES:

1. CABLE ASSEMBLIES ARE PRIMARILY FOR USE IN CONNECTING ELECTRONIC TEST EQUIPMENT TO THE AIRCRAFT POWER RECEPTACLE WIRED IN ACCORDANCE WITH MS24435.
2. MS27603-2 IS AN ADAPTER CABLE USED WITH MS27603-1 CABLE FOR 400 Hz, SINGLE PHASE POWER.
3. TEST EQUIPMENT DESIGNED FOR 60 Hz, SINGLE PHASE POWER ONLY SHALL BE PROVIDED WITH MS27603-1 CABLE.
4. TEST EQUIPMENT DESIGNED FOR 60 AND 400 Hz, SINGLE PHASE POWER SHALL BE PROVIDED WITH A MS27603-2 ADAPTER AND A MS27603-1 CABLE.
5. TEST EQUIPMENT DESIGNED FOR USE WITH 400 Hz, THREE PHASE POWER ONLY SHALL BE PROVIDED WITH MS27603-3 CABLE.
6. TEST EQUIPMENT DESIGNED FOR USE WITH 28 V, D-C POWER SHALL BE PROVIDED WITH MS27603-4 CABLE.
7. TEST EQUIPMENT DESIGNED FOR USE WITH 400 Hz, SINGLE PHASE POWER ONLY SHALL BE PROVIDED WITH MS27603-1 CABLE MODIFIED AS FOLLOWS:

   SUBSTITUTE ITEMS 2, 4, AND 11, IN LIEU OF 1.
8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS SPECIFIED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS.
10. CABLE MARKING IDENTIFICATION SHALL BE MOLDED OR STAMPED ON A SLEEVE TYPE MARKER WHICH SHALL BE PERMANENTLY ATTACHED TO THE CABLE.

REVIEWER:
AIR FORCE - 82

APPROVED 13 JULY 1970 REVISED (A) 23 August 1983

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to apply this standard where suitable.

| | | |
|---|---|---|
| P.A. AIR FORCE - 11<br>Other Cust | TITLE<br>CABLE ASSEMBLIES, POWER, ELECTRONIC TEST EQUIPMENT, 10 AMPS MAX. | MILITARY STANDARD<br>MS27603(USAF) |
| PROCUREMENT SPECIFICATION<br>MIL-T-21200 | SUPERSEDES:<br>MS21993 (ASG) FOR AIR FORCE USE | SHEET 2 OF |

DD FORM 672-1 (Limited coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.