
FED. SUP CLASS
1560

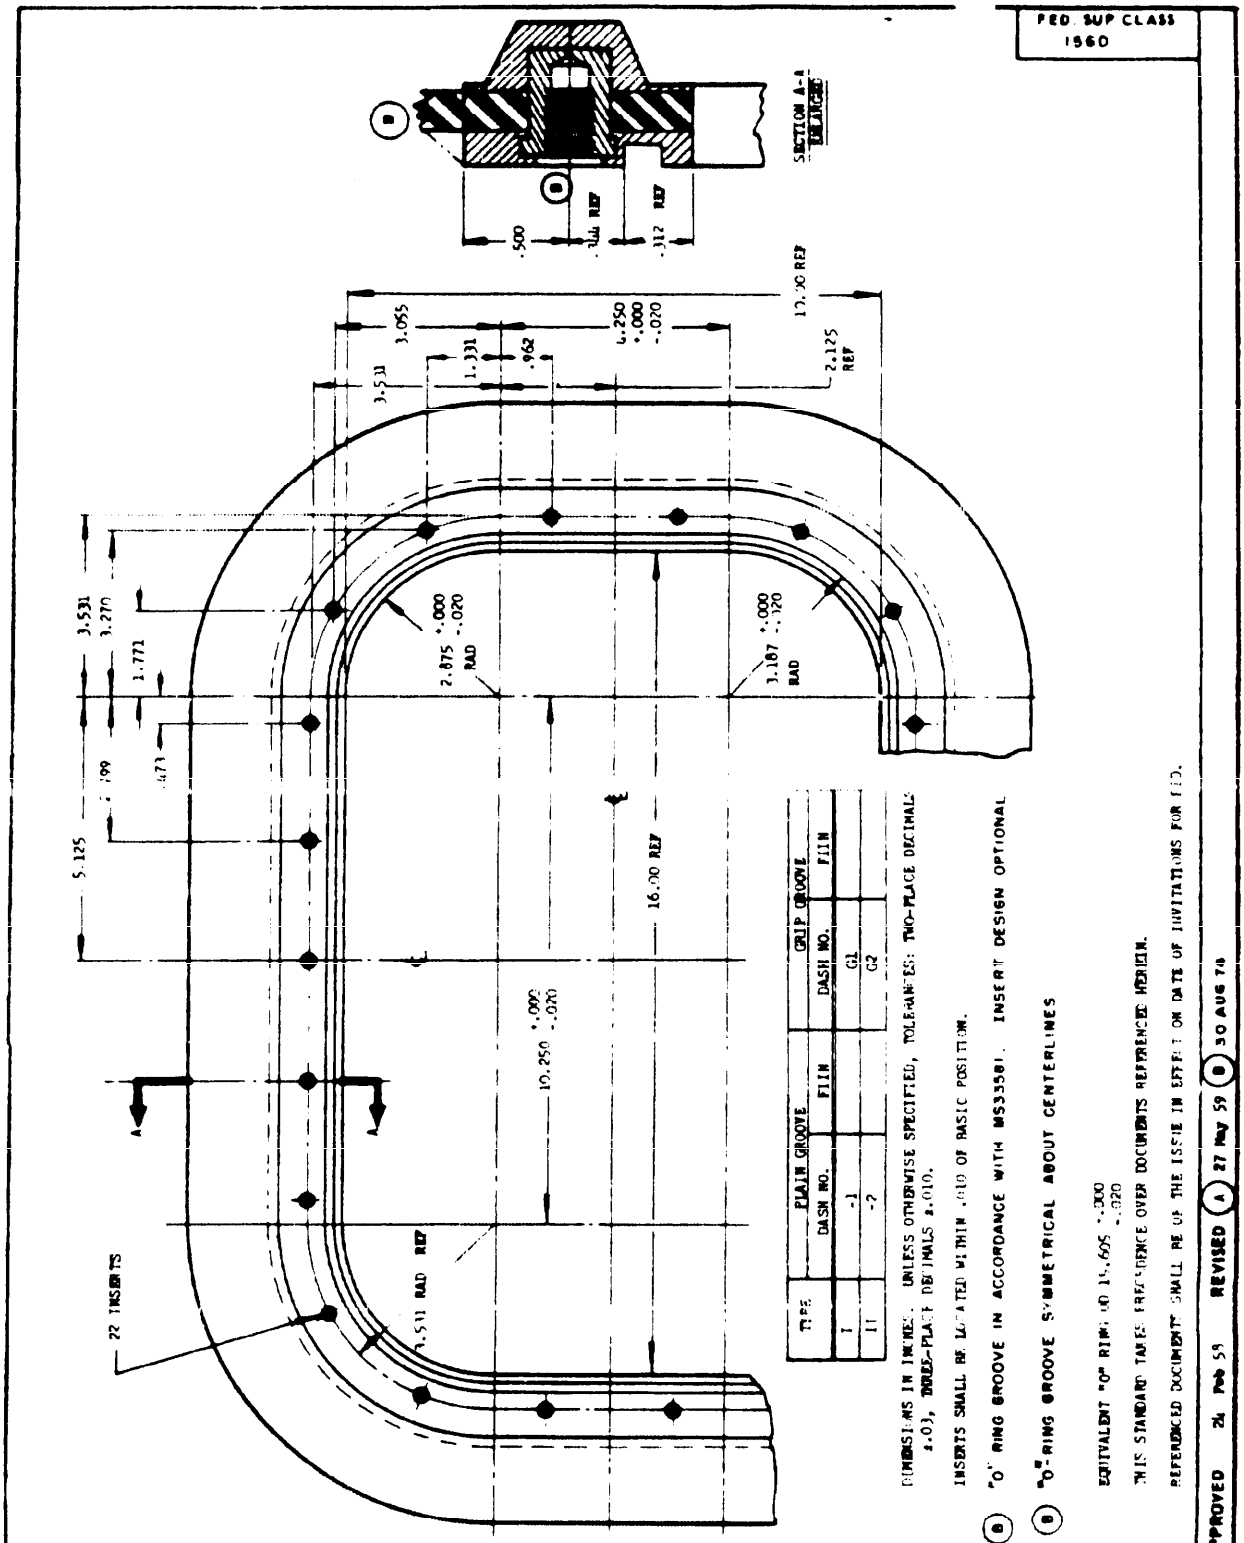

TYPE	PLAIN GROOVE DASH NO.	PLAIN GROOVE FIN	GRIP GROOVE DASH NO.	GRIP GROOVE FIN
I	-1		G1	
II	-2		G2	

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.03, THREE-PLACE DECIMALS ±.010.

INSERTS SHALL BE LOCATED WITHIN .010 OF BASIC POSITION.

(B) "O" RING GROOVE IN ACCORDANCE WITH MS33581. INSERT DESIGN OPTIONAL

(B) "O"-RING GROOVE SYMMETRICAL ABOUT CENTERLINES

EQUIVALENT "O" RING ID 14.695 +.000 -.020

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENT SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 24 Feb 59 REVISED (A) 27 May 59 (B) 30 AUG 76

This military standard is approved by the Department of Defense and is mandatory for all activities. Selection for all new engineering and design applications and for repairing you should be made from this document.

REVIEWER:
AIR FORCE - 80, 82

P.A. AIR FORCE - 11
Other Coast Army -
Navy - AS

TITLE
(B) FITTING, ATTACHMENT, MOLDED TANK, FLUSH, "O" RING, RECTANGULAR, 10 x 16

MILITARY STANDARD
MS29563

PROCUREMENT SPECIFICATION
MIL-F-6396

SUPERSEDES

SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:03Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.