INCH - POUND


MS 35438B
15 December 1989
SUPERSEDING
MS 35438A
23 July 1956

# MILITARY SPECIFICATION SHEET


## TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING INSULATION GRIP, ONE HOLE, FLAG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-T-15659.

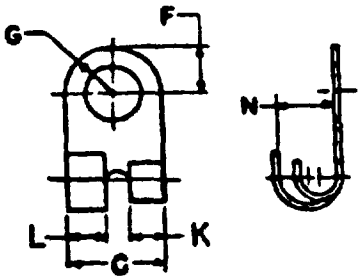

RIGHT HAND

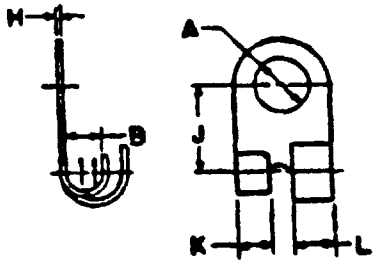

LEFT HAND

REQUIREMENTS:

(B) 1. MATERIAL: Electrolytic Copper Sheet in accordance with AMS 4500.

(B) 2. FINISH: Electrpdeposoted tin over entire surface in accordance with MIL-T-15659. Minimum thickness 0.0005. Remove all Burrs.

3. DIMENSIONS AND TOLERANCE: Dimensions are in inches. Unless otherwise specified, tolerance is ± .015.

4. The MS part number consists of the MS number plus the dash number.

5. In the event of a conflict between the text of this Military Specification Sheet and the references cited herein, the text of this Military Specification Sheet shall take precedence.

6. Referenced Government and (non-government) documents of the issue listed in the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this Militry Specification Sheet to the extent specified herein.

(B) Denotes Change



AMSC/NA FSC 5940
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.

Table I. Dimensional Data

| RIGHT HAND DASH NO | LEFT HAND DASH NO | WIRE SIZE AWG NOM | STUD SIZE | A HOLE ∅ MIN | A HOLE ∅ MAX | B | C | F | G RAD | H ±.003 | J | K | L | N |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 29 | 16 | 6 | .141 | .153 | 1/16 | 5/16 | 9/64 | 11/64 | .032 | 11/32 | 1/8 | 1/8 | 7/64 |
| 2 | 30 | 16 | 8 | .167 | .179 | 1/16 | 3/8 | 3/16 | 7/32 | .032 | 13/64 | 1/8 | 5/32 | 7/64 |
| 3 | 31 | 14-16 | 8 | .167 | .179 | 1/16 | 5/16 | 5/32 | 3/16 | .022 | 11/32 | 1/8 | 1/8 | 1/8 |
| 4 | 32 | 14-16 | 10 | .193 | .205 | 1/16 | 5/16 | 5/32 | 3/16 | .022 | 11/32 | 1/8 | 1/8 | 1/8 |
| 5 | 33 | 14-16 | 10 | .193 | .205 | 5/64 | 3/8 | 3/16 | 3/16 | .032 | 13/32 | 1/8 | 3/16 | 5/32 |
| 6 | 34 | 14-16 | 1/4 | .258 | .285 | 5/64 | 3/8 | 3/16 | 3/8 | .032 | 13/32 | 1/8 | 3/16 | 5/32 |
| 7 | 35 | 14-16 | 5/16 | .320 | .347 | 5/64 | 5/8 | 5/16 | 3/8 | .040 | 1/2 | 1/4 | 9/32 | 5/32 |
| 8 | 36 | 14-16 | 3/8 | .383 | .410 | 5/64 | 5/8 | 5/16 | 3/8 | .040 | 1/2 | 1/4 | 9/32 | 5/32 |
| 9 | 37 | 12-14 | 8 | .167 | .179 | 3/32 | 3/8 | 3/16 | 7/32 | .032 | 9/32 | 1/8 | 5/32 | 11/64 |
| 10 | 38 | 12-14 | 10 | .193 | .205 | 3/32 | 3/8 | 3/16 | 7/32 | .032 | 9/32 | 1/8 | 5/32 | 11/64 |
| 11 | 39 | 10-12 | 10 | .193 | .205 | 1/8 | 3/8 | 3/16 | 7/32 | .040 | 11/32 | 1/8 | 5/32 | 7/32 |
| 12 | 40 | 10-12 | 10 | .193 | .205 | 1/8 | 5/8 | 5/16 | 5/8 | .040 | 9/16 | 1/4 | 9/32 | 7/32 |
| 13 | 41 | 10-12 | 1/4 | .256 | .285 | 1/8 | 5/8 | 5/16 | 5/8 | .040 | 9/16 | 1/4 | 9/32 | 7/32 |
| 14 | 42 | 10-12 | 5/16 | .320 | .347 | 1/8 | 5/8 | 5/16 | 5/8 | .040 | 9/16 | 1/4 | 9/32 | 7/32 |
| 15 | 43 | 8 | 10 | .193 | .205 | 11/64 | 3/8 | 3/16 | 3/8 | .040 | 3/8 | 1/8 | 5/32 | 1/4 |
| 16 | 44 | 8 | 3/8 | .383 | .410 | 5/32 | 3/4 | 3/8 | 7/16 | .045 | 11/16 | 5/16 | 11/32 | 5/16 |
| 17 | 45 | 8 | 1/2 | .510 | .537 | 5/32 | 3/4 | 3/8 | 7/16 | .045 | 11/16 | 5/16 | 11/32 | 5/16 |
| 18 | 46 | 6-8 | 10 | .193 | .205 | 7/32 | 5/8 | 5/16 | 3/8 | .045 | 9/16 | 1/4 | 9/32 | 9/32 |
| 19 | 47 | 6-8 | 12 | .221 | .236 | 7/32 | 5/8 | 5/16 | 3/8 | .045 | 9/16 | 1/4 | 9/32 | 9/32 |
| 20 | 48 | 6-8 | 1/4 | .256 | .285 | 7/32 | 5/8 | 5/16 | 3/8 | .045 | 9/16 | 1/4 | 9/32 | 9/32 |
| 21 | 49 | 6-8 | 5/16 | .320 | .347 | 7/32 | 5/8 | 5/16 | 3/8 | .045 | 9/16 | 1/4 | 9/32 | 9/32 |
| 22 | 50 | 6-8 | 5/16 | .320 | .347 | 7/32 | 3/4 | 3/8 | 3/4 | .045 | 23/32 | 5/16 | 11/32 | 5/16 |
| 23 | 51 | 6-8 | 3/8 | .383 | .410 | 7/32 | 3/4 | 3/8 | 3/4 | .045 | 23/32 | 5/16 | 11/32 | 5/16 |
| 24 | 52 | 2 | 1/4 | .256 | .285 | 5/32 | 5/8 | 1/4 | 5/8 | .057 | 3/4 | 1/4 | 9/32 | 17/64 |
| 25 | 53 | 2 | 3/8 | .383 | .410 | 5/32 | 5/8 | 5/16 | 5/8 | .057 | 11/16 | 1/4 | 9/32 | 17/64 |
| 26 | 54 | 2 | 5/16 | .320 | .347 | 5/32 | 5/8 | 5/16 | 5/8 | .057 | 11/16 | 1/4 | 9/32 | 17/64 |
| 27 | 55 | 2 | 1/2 | .510 | .537 | 5/32 | 7/8 | 7/16 | 7/8 | .057 | 13/16 | 21/64 | 25/64 | 17/64 |
| 28 | 56 | 1 | 3/8 | .383 | .410 | 3/16 | 7/8 | 7/16 | 7/16 | .091 | 13/16 | 21/64 | 25/64 | 19/64 |

Custodian:
ARMY - AR
NAVY - SH
AIR FORCE - 85
Review Activities:
ARMY -AV, MI
AIR FORCE - 11, 99
DLA - DGSC
User Activities:
NAVY - AS, MC

Preparing Activity:
ARMY - AR
Project Number 5940-1052



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.