
FED. SUP CLASS
3830

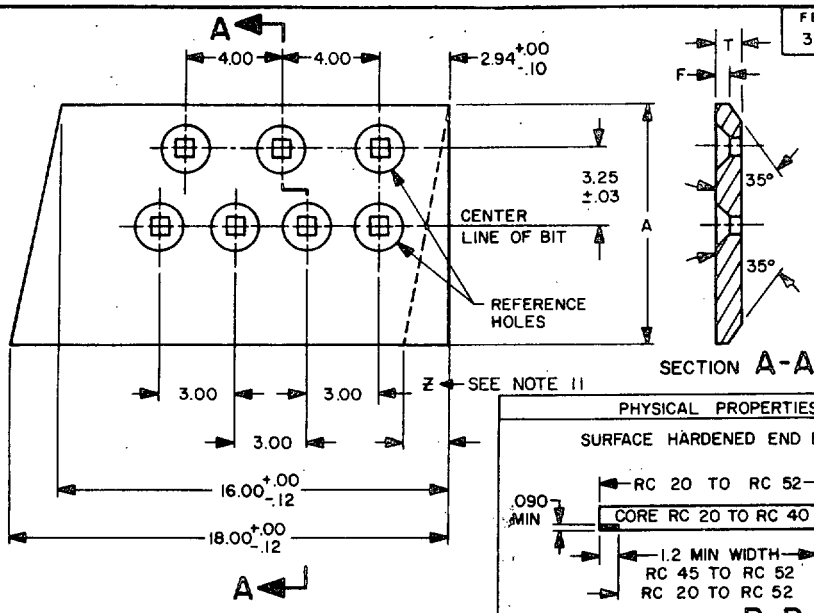


RIGHT OR LEFT HAND
RIGHT HAND SHOWN


SECTION A-A

PHYSICAL PROPERTIES

SURFACE HARDENED END BITS

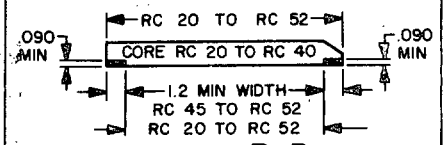

SECTION B-B

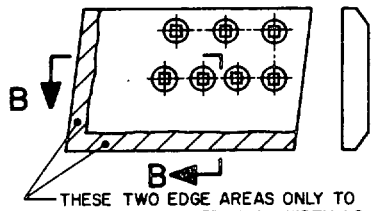

THESE TWO EDGE AREAS ONLY TO BE SURFACE HARDENED. MIN WIDTH 1.2 INCH – MIN DEPTH .090 INCH.

CAST AND THROUGH HARDENED END BITS
SURFACE HARDNESS – RC 45 TO RC 52
CORE HARDNESS – RC 45 TO RC 52
MIN IMPACT VALUE – 15 FT-LBS CHARPY "V" NOTCH AT 65°F TO 85°F

DIMENSIONS AND TOLERANCES						
CAST EDGES			OTHERS			
A	T	F	A	T	F	Z
10.00	1.000		10.00	1.000		1.90
+.06	+.093	MAX. .60	+.06	+.093	MAX. .60	
-.18	-.025	MIN. .156	-.18	-.025	MIN. .156	

PART NUMBERS MS 39104-1R, MS 39104-3R
MS 39104-1L, MS 39104-3L

NOTES:

1. BOLTS FOR PART NUMBER MS 39104-1 AND -3 SHALL BE .875 INCH IN DIAMETER AND CONFORM TO SAE STANDARD COVERING BOLTS FOR USE WITH DOZER CUTTING EDGES (J740a).
2. HOLES FOR PART NUMBER MS 39104-1 AND -3 SHALL BE FOR A 1.875 INCH DIAMETER BOLT WITH A NUMBER 3 PLOW BOLT HEAD IN ACCORDANCE WITH CROSS SECTION DRAWINGS 2 OR 3 OF SAE STANDARD FOR COUNTERSUNK SQUARE HOLES FOR CUTTING EDGES AND END BITS (J740a).
3. EACH BOLT HOLE SHALL BE LOCATED WITHIN ±1/32 INCH OF TRUE POSITION USING THE CENTER OF THE REFERENCE HOLE AS A DATUM POINT.
4. CENTERS OF BOLT HOLES SHALL BE IN LINE WITHIN ±1/32 OF ESTABLISHED CENTERLINE.
5. THE ABOVE DRAWINGS ARE NOT TO SCALE.
6. UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) ENTIRE STANDARD REVISED: NOTES IN SHEETS 1 AND 2 COMBINED; NOTES 1, 2, 9 AND 10 REVISED; NOTES RENUMBERED.

APPROVED 12 FEB 1960 REVISED (C) 5 MAY 1970

User activities: YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. ME Other Cust: AIR FORCE – 84	TITLE: END BITS, DOZER MOLDBOARD	MILITARY STANDARD MS 39104
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
3830

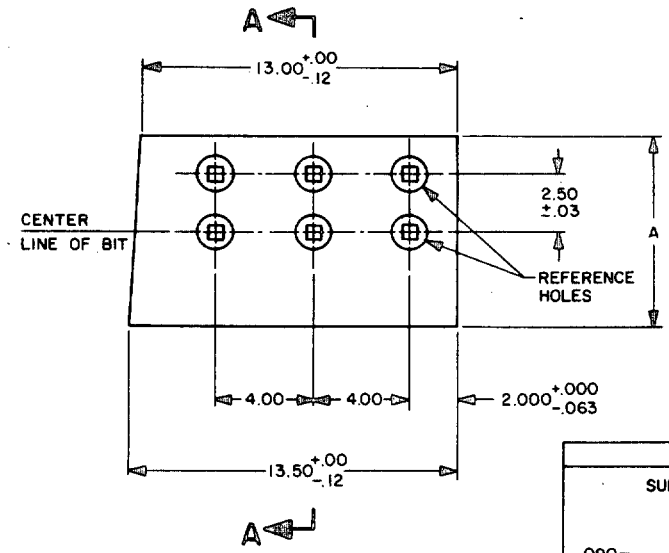

RIGHT OR LEFT HAND
RIGHT HAND SHOWN




SECTION A-A


DIMENSIONS AND TOLERANCES					
CAST EDGES			OTHERS		
A	T	F	A	T	F
8.00	.625		8.00	.625	
+.06	+.093	MAX. .375	+.06	+.093	MAX. .375
−.18	−.025	MIN. .156	−.18	−.025	MIN. .156

PHYSICAL PROPERTIES

SURFACE HARDENED END BITS

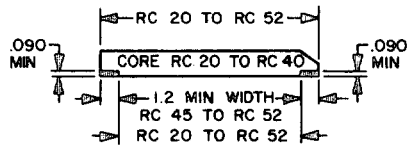

SECTION B-B

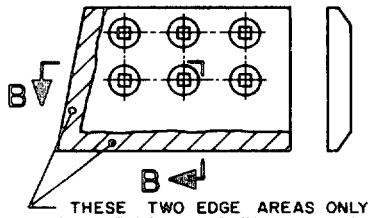

THESE TWO EDGE AREAS ONLY TO BE SURFACE HARDENED. MIN WIDTH 1.2 INCH—MIN DEPTH .090 INCH.

CAST AND THROUGH HARDENED END BITS:
SURFACE HARDNESS – RC 45 TO RC 52
CORE HARDNESS – RC 45 TO RC 52
MIN IMPACT VALUE – 15 FT-LBS CHARPY "V" NOTCH AT 65°F TO 85°F

PART NUMBERS MS 39104-2R
MS 39104-2L

NOTES: CONTINUED

9. BOLTS FOR PART NUMBER MS 39104-2 SHALL BE .750 INCH IN DIAMETER AND CONFORM TO SAE STANDARD COVERING BOLTS FOR USE WITH DOZER CUTTING EDGES (J740a).

10. HOLES FOR PART NUMBER MS 39104-2 SHALL BE FOR A .750 INCH DIAMETER BOLT WITH A NUMBER 3 PLOW BOLT HEAD IN ACCORDANCE WITH CROSS SECTION DRAWINGS 2 OR 3 OF SAE STANDARD FOR COUNTERSUNK SQUARE HOLES FOR CUTTING EDGES AND END BITS (J740a).

11. Z DIMENSION IS APPLICABLE FOR MS 39104 -3R AND MS 39104-3L WHEN USED WITH SEMI-U-DOZER.

APPROVED 12 FEB 1960 REVISED © For changes, See Sheet 1

User activities: YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ME Other Cust AIR FORCE – 84	TITLE END BITS, DOZER MOLDBOARD	MILITARY STANDARD MS 39104
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF

DD FORM 1 SEP 67 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.