DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

REVIEWER ACTIVITIES:
ARMY-AT, AV, ME, MI
DLA-IS

USER ACTIVITIES:
ARMY-CR, GL

FED SUP CLASS
5305

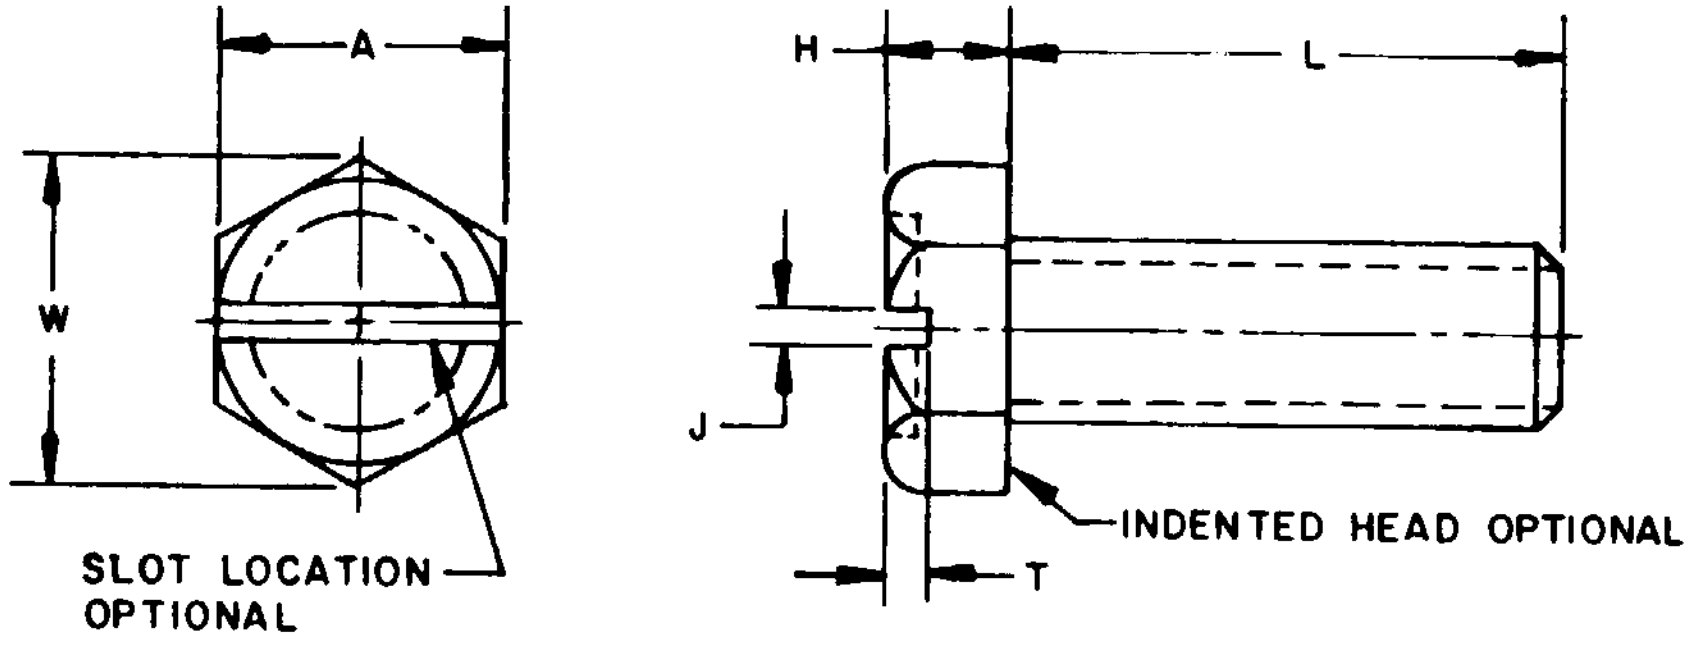

TABLE I. DASH NUMBERS AND DIMENSIONS

NOMINAL SIZE		NO.4 .112		NO.6 .138		NO.8 .164		NO.10 .190		1/4 .250		5/16 .312		3/8 .375	
THREADS PER INCH		48	40	40	32	36	32	32	24	28	20	24	18	24	16
A WIDTH ACROSS FLATS	MAX MIN	.187 .181		.250 .244		.250 .244		.312 .305		.375 .367		.500 .489		.562 .551	
W WIDTH ACROSS CORNERS	MIN	.202		.272		.272		.340		.409		.545		.614	
H HEAD HEIGHT	MAX MIN	.060 .049		.093 .080		.110 .096		.120 .105		.190 .172		.230 .208		.295 .270	
J SLOT WIDTH	MAX MIN	.039 .031		.048 .039		.054 .045		.060 .050		.075 .064		.084 .072		.094 .081	
T SLOT DEPTH	MAX MIN	.036 .025		.046 .033		.066 .052		.072 .057		.101 .083		.122 .100		.156 .131	

L LENGTH	TOLERANCE	DASH NUMBERS																											
		UNF-2A		UNC-2A		UNF-2A		UNC-2A		UNF-2A		UNC-2A		UNF-2A		UNC-2A		UNF-2A		UNC-2A		UNF-2A		UNC-2A		UNF-2A		UNC-2A	
		CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES	CARBON STEEL	CRES
.25	+.00 -.03	1	1C	11	11C	21	21C	31	31C																				
.31		2	2C	12	12C	22	22C	32	32C																				
.38		3	3C	13	13C	23	23C	33	33C	43	43C	53	53C																
.50		4	4C	14	14C	24	24C	34	34C	44	44C	54	54C	64	64C	74	74C												
.62		5	5C	15	15C	25	25C	35	35C	45	45C	55	55C	65	65C	75	75C	85	85C	95	95C								
.75		6	6C	16	16C	26	26C	36	36C	46	46C	56	56C	66	66C	76	76C	86	86C	96	96C	106	106C	116	116C	126	126C	136	136C
.88						27	27C	37	37C	47	47C	57	57C	67	67C	77	77C	87	87C	97	97C	107	107C	117	117C	127	127C	137	137C
1.00										48	48C	58	58C	68	68C	78	78C	88	88C	98	98C	108	108C	118	118C	128	128C	138	138C
1.25	+.00 -.06													69	69C	79	79C	89	89C	99	99C	109	109C	119	119C	129	129C	139	139C
1.50														70	70C	80	80C	90	90C	100	100C	110	110C	120	120C	130	130C	140	140C
1.75																		91	91C	101	101C	111	111C	121	121C	131	131C	141	141C
2.00																		92	92C	102	102C	112	112C	122	122C	132	132C	142	142C

Ⓐ ENTIRE STANDARD REVISED

APPROVED **18 SEP 68** REVISED Ⓐ **15 OCT 87**

P.A. **ARMY-AR**
Other Cust
NAVY-SH
AIRFORCE-99

INTERNATIONAL INTEREST

TITLE
SCREW, MACHINE-STEEL, HEXAGON HEAD, SLOTTED, UNF-2A AND UNC-2A

MILITARY STANDARD

MS51849

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES:

PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:10Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

REQUIREMENTS:

1. MATERIAL: CARBON STEEL, GRADE 1013 (UNS G10130) TO GRADE 1022 (UNS G10220) AND CORROSION-RESISTANT STEEL, 300 SERIES IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

2. CLEANED, DESCALED AND PASSIVATED: CORROSION-RESISTANT STEEL SCREWS SHALL BE CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH ASTM A380.

3. PROTECTIVE COATING AND SURFACE TREATMENT: CARBON STEEL SCREWS SHALL BE CADMIUM PLATED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

4. MAGNETIC PERMEABILITY: CORROSION-RESISTANT STEEL SCREWS SHALL MEET THE MAGNETIC PERMEABILITY REQUIREMENTS OF THE PROCUREMENT SPECIFICATION.

5. THREADS: THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.

6. THREAD LENGTH: SCREWS SHALL HAVE FULL FORM THREADS EXTENDING TO WITHIN TWO THREADS OF THE BEARING SURFACE OF THE HEAD.

7. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS51849-31C

DASH NUMBER

BASIC MS NUMBER

MS51849-31C INDICATES - SCREW, MACHINE-STEEL, HEXAGON HEAD, SLOTTED, .138-32UNC-2A NOMINAL SIZE, .25 NOMINAL LENGTH, CORROSION-RESISTANT STEEL.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
ARMY-CR,GL

REVIEWER ACTIVITIES:
ARMY-AT,AV,ME,MI
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 18 SEP 68 REVISED Ⓐ FOR CHANGES SEE PAGE 1 AND 2

P.A. ARMY-AR Other Cust NAVY-SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE-STEEL, HEXAGON HEAD, SLOTTED, UNF-2A AND UNC-2A	MILITARY STANDARD MS51849
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:10Z
Check the source to verify that this is the current version before use.