



FED. SUP CLASS
2320

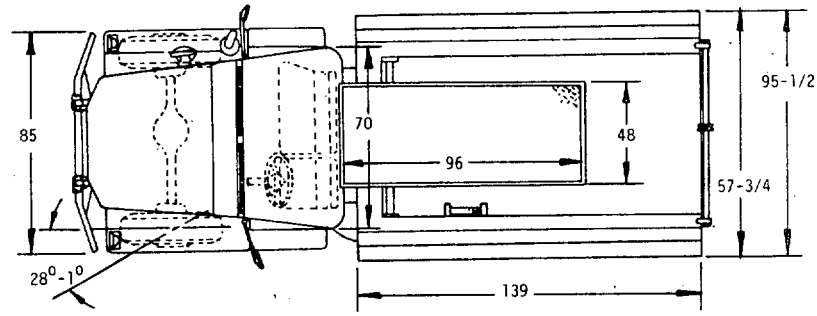

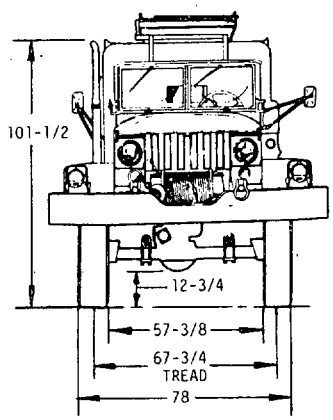

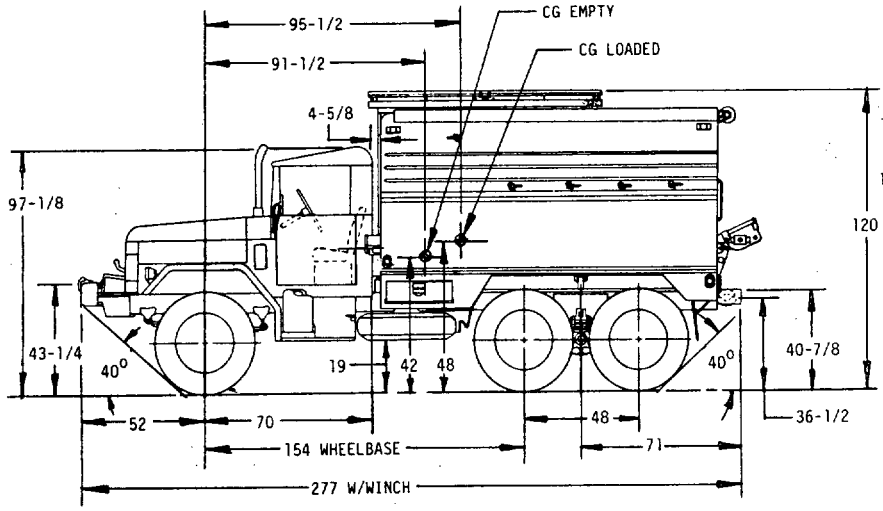

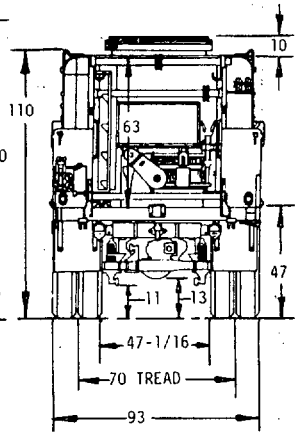

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52172	8736781	WITH WINCH

APPROVED 14 JUN 85 REVISED

P.A. ARMY-AT
Other Cust

TITLE
TRUCK TELEPHONE MAINTENANCE
2-1/2 TON 6x6 M763 W/W

MILITARY STANDARD
MS52172(AT)

PROCUREMENT SPECIFICATION
MIL-T-46780

SUPERSEDES:

SHEET 1 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

CURB WEIGHT, FULLY EQUIPPED LESS PAYLOAD AND CREW:	W/W	
FRONT AXLE	7,420	LBS
REAR BOGIE	10,900	LBS
TOTAL	18,320	LBS
PAYLOAD, LOADED:	1,500	LBS
GROSS WEIGHT, FULLY EQUIPPED PLUS PAYLOAD, LESS CREW:		
FRONT AXLE	7,900	LBS
REAR BOGIE	16,420	LBS
TOTAL	24,320	LBS
(ADD 800 LBS FOR 4 MAN CREW WITH EQUIPMENT)		
TOWED LOAD ALLOWANCE, LOADED:	5,000	LBS

SHIPPING DIMENSIONS:		
CU FT	1,837	
SQ.FT	184	
LENGTH	277	IN
WIDTH:	95-1/2	IN
HEIGHT:		
OVERALL HEIGHT	120	IN
LOWEST OPERABLE	120	IN

CENTER OF GRAVITY (AT CURB WEIGHT):	W/W	
ABOVE GROUND	42	IN
REAR OF CENTER LINE OF FRONT AXLE	91-1/2	IN
CENTER OF GRAVITY LOCATION:		
ABOVE GROUND	48	IN
REAR OF CENTERLINE OF FRONT AXLE	95-1/2	IN

NOTE: VARIES WITH LOAD AND POSITION PLACED ON TRUCK

PERFORMANCE:

AT GROSS WEIGHT W/O TOWED LOAD:	
MAXIMUM SPEED	56 MPH
MAXIMUM GRADE	60%
CRUISING RANGE (W/DIESEL FUEL)	240 MILES
AT GROSS WEIGHT W/TOWED LOAD:	
MAXIMUM SPEED	45 MPH
MAXIMUM GRADE	45%
CRUISING RANGE (W/DIESEL FUEL)	210 MILES
TELEPHONE MAINTENANCE BODY:	11623400
EQUIPPED WITH REAR WINCH	11623130
DERRICK ASSY	11623467
CABINETS, TUNNELS AND TRAYS FOR STORAGE OF EQUIPMENT	

KIT PROVISIONS:

"A" FRAME (FRONT	8390117
AIR BRAKE	10937003
ELECTRIC BRAKE	10937002
FORDING	10937874-1
PERSONNEL HEATER (HOT WATER) (ABOVE 25°)	10937799
WINDSHIELD WASHER	10896804
WINTERIZATION (ARCTIC 65°)	10896388
HARDTOP CLOSURE	70853350
PERSONNEL HEATER (FUEL BURNING)	10896381
ALCOHOL EVAPORATOR	10937856
RADIATOR COVER	7386178
SLAVE CABLE	10896518
THERMAL BARRIER	10896519
POWER PLANT HEATER (COOLANT)	10896394

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 14 JUN 85 REVISED

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52172	8736781	WITH WINCH

P.A. ARMY-AT Other Cust	TITLE TRUCK TELEPHONE MAINTENANCE 2-1/2 TON 6x6 M763 W/W	MILITARY STANDARD MS52172(AT)
PROCUREMENT SPECIFICATION MIL-T-46780	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1, SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.