

FED. SUP CLASS
2320

USER ACTIVITIES:

REVIEWER ACTIVITIES:

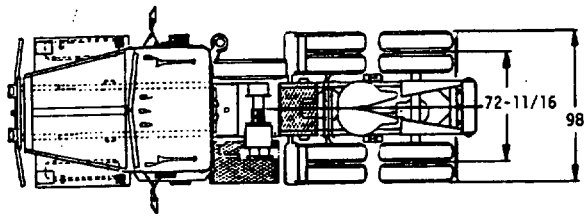

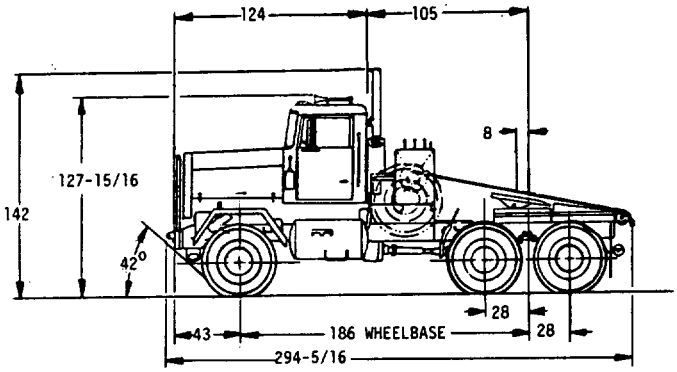

APPROVED 3 JUL 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRACTOR, TRUCK: 20 TON, 6×6, M916.	MILITARY STANDARD MS52197(AT)
PROCUREMENT SPECIFICATION MIL-T-PD-9156	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CURB WEIGHT: 24,971 LBS

AXLE LOADS: (WITH 40,000 LBS 5TH WHEEL LOAD)
- FRONT AXLE 14,425 LBS
- REAR BOGIE 50,896 LBS

GROSS VEHICLE WEIGHT: 65,321 LBS

GROSS AXLE WEIGHT RATING:
- FRONT AXLE 14,860 LBS
- REAR BOGIE 52,160 LBS

GROSS VEHICLE WEIGHT RATING: 66,000 LBS

TOWED LOAD:(M-870 TRAILER-40,000 LBS K P) 60,000 LBS

GROSS COMBINATION: WEIGHT RATING 126,000 LBS

ENGINE: DIESEL 6 CYL 4 CYCLE
- DISPLACEMENT 855 CU IN
- COMPRESSION RATIO 13.5:1
- HORSEPOWER-GROSS 400 @2100 RPM
- TORQUE-GROSS- 1150 FT LBS @1500 RPM
- LUBE CAPACITY 46 QTS
- COOLANT CAPACITY 17-1/4 GAL
- FUEL CAPACITY (118 TANK) USABLE 112 GAL
- GOVERNED SPEED 2100 RPM

TRANSMISSION:
- FORWARD-GEARS 16
- REVERSE-GEARS 2
- RATIOS; 1ST 14.77; 2ND 12.21; 3RD 10.07; 4TH 8.33; 5TH 6.89; 6TH 5.70; 7TH 4.70; 8TH 3.89; 9TH 3.14; 10TH 2.60; 11TH 2.14; 12TH 1.77; 13TH 1.47; 14TH 1.21; 15TH 1.00; 16TH .83; REVERSE 14.77; REVERSE 8.33.
- SHIFT REMOTE AIR CONTROL POWERED SHIFT
- LUBE CAPACITY 6 GAL

TRANSFER CASE:
- RATIO 1:1
- TORQUE CAPACITY 15,155 FT LBS
- LOCK-UP FRONT AXLE AIR OPERATED
- LUBE CAPACITY 5 QTS

AXLES:
- RATIO 6.17:1
- RATED CAPACITY 20,000 LBS
- STEEL ANGLE 28 DEGREES

REAR BOGIE
- RATIO 6.17:1
- RATED CAPACITY (TANDEM) 58,000 LBS
- INTER-AXLE DIFFERENTIAL BEVEL GEAR
- LOCK UP AIR OPERATED
- AXLE DIFFERENTIAL BEVEL GEAR
- LUBE CAPACITY FORWARD 34 PTS
- REVERSE 28 PTS

TIRES:
- SIZE 11 X 24
- TYPE BIAS PLY-ON/OFF HIGHWAY
- LOAD RANGE/PLY RATING G/14
- STATIC LOADED RADIUS 22-1/2
- RATED CAPACITY SINGLE/DUAL 7,430/6,520 LBS

STEERING:
- TYPE INTEGRAL POWER
- RATIO 23.4:1
- PISTON DIAMETER 2.80
- WHEEL DIAMETER 20
- PUMP GEAR DRIVEN

BRAKES:
- SERVICE AIR ACTUATED
- FRONT AXLE 16" ACTUATOR WEDGE CAM
- DIA X WIDTH 17 X 6
- REAR BOGIE 30"ACTUATOR "S" CAM
- DIA X WIDTH 16-1/2 X 7
- PARKING
- TYPE SPRING CHAMBER
- LOCATION REAR TANDEMS
- ACTUATION AIR EXHAUST

ELECTRICAL SYSTEM:
- TYPE BASIC 12 VOLT
- BATTERIES QTY 4 12 VOLT
- ALTERNATOR, AMPS 85/15
- STARTER 24 VOLT

FRAME:
- TYPE
- STEEL HEAT TREATED BOLTED 110,000 PSI
- CHANNEL SECTION 10-5/8 X 3-1/4 X 3/8
- AUXILIARY SECTION (WRAPPER) 11-1/2 X 3-5/8 X 3/8
- SECTION MODULUS 38.04 IN^3
- OVERALL WIDTH 34 IN

FIFTH WHEEL:
- TYPE 36 DIA-SINGLE OSCILLATING
- RATED CAPACITY 70,000 VERT 200,000 DRAWBAR
- KING PIN SIZE 3-1/2
- PITCH FWD/AFT 15/10 DEGREES

PINTLE:
- RATED CAPACITY 30 TON

ADDITIONAL DATA:
- CAB TYPE 2 PASSENGER ALL STEEL W/BUTTERFLY HOOD
- FLOOD LIGHTS REMOVABLE BACK OF CAB (2)
- TIE DOWNS TOW & LIFT EYES LOCATIONS (13)
- ARTIC KIT (OPTIONAL) STOLPER IND
- TOOL BOX IN CAB UNDER PASS SEAT
- AIR HORNS TOP OF CAB
- WINCH BEHIND CAB
- TYPE HYDRAULIC PLANETARY
- CAPACITY 45,000 LBS

PERFORMANCE:
- MAXIMUM SPEED 59 MPH
- SPEED ON 2.93% GRADE 25 MPH
- MAXIMUM GRADEABILITY 33.8%
- MINIMUM SUSTAINED SPEED 2.23 MPH
- MAXIMUM DRAWBAR PULL 38,607 LBS

WHEELS:
- SIZE DIA X RIM WIDTH 11 QTS 24 X 8
- NUMBER OF STUDS BOLT CIRCLE 10, 11-1/4
- STUD SIZE 1-1/8
- OFFSET/DUAL SPACING 6-7/8/13-3/4
- RATED CAPACITY 7,430 LBS

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 3 JUL 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: TRACTOR, TRUCK: 20 TON, 6x6, M916.	MILITARY STANDARD MS52197(AT)
PROCUREMENT SPECIFICATION MIL-T-PD-9156	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1985 — 505-038/23998

Source: https://assist.dla.mil - Downloaded: A2Z Inc. NOT FOR RESALE
Check the source to verify that this is the current version before use.