



FED. SUP CLASS
2540

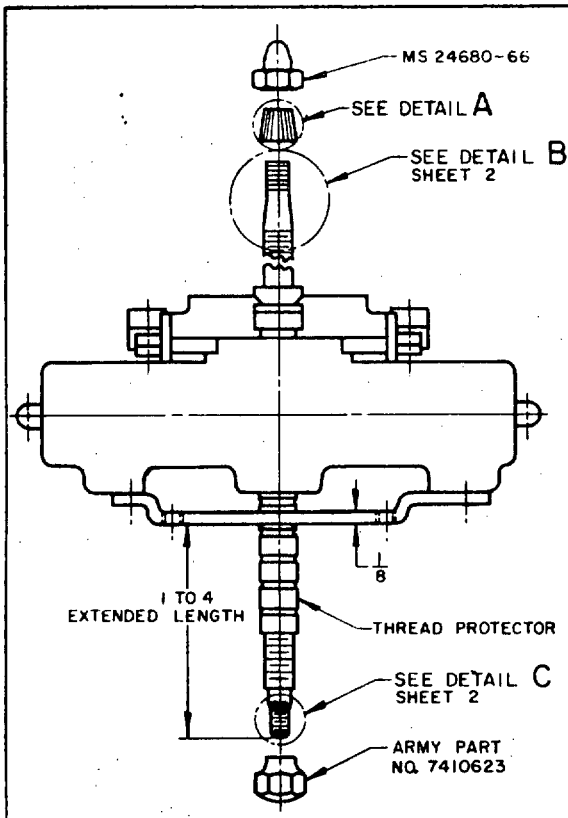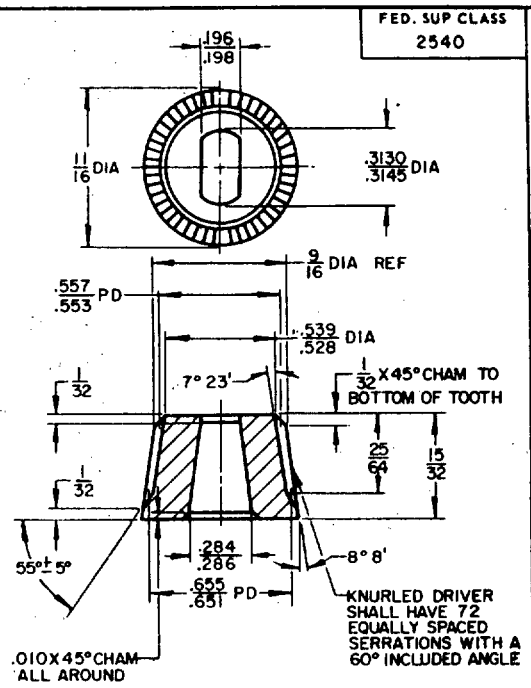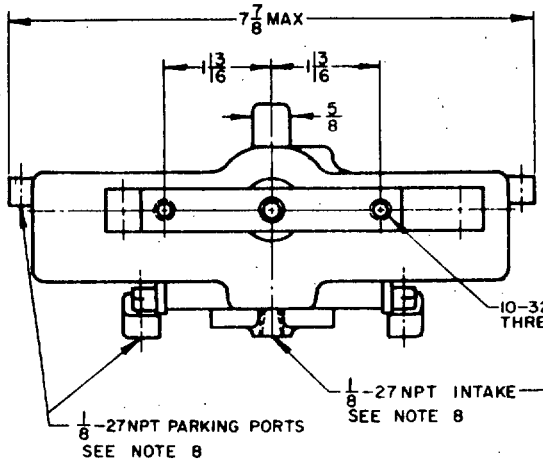


DETAIL A

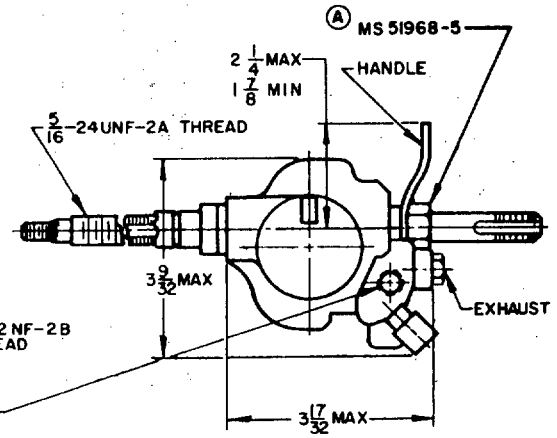


(A) FOR CHANGES SEE SHEETS 1 AND 2

| MS PART NO. | FORMER ARMY PART NO. |
|---|---|
| MS 53017-1 | 8379907 |

| | | |
|---|---|---|
| P.A. ARMY-AT<br>Other Cust<br>AF-84 | TITLE<br>MOTOR, WINDSHIELD WIPER, PNEUMATIC, UNIVERSAL | MILITARY STANDARD<br>MS 53017 |
| PROCUREMENT SPECIFICATION<br>MIL-M-12185 | SUPERSEDES: | SHEET 1 OF 2 |

USER ACTIVITY: ARMY- ME

APPROVED 3 JULY 1962 REVISED (A) 9 JULY 1968


This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

DD FORM 1 SEP 67 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2540

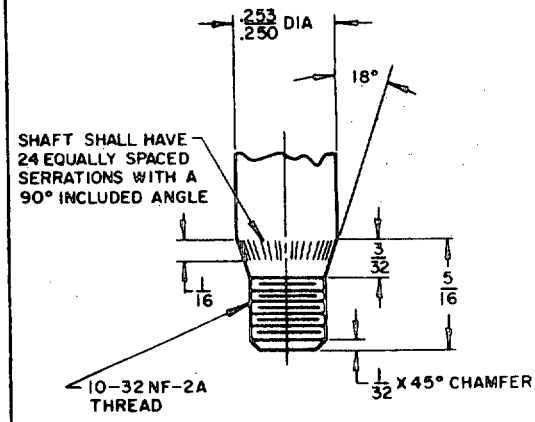


DETAIL C

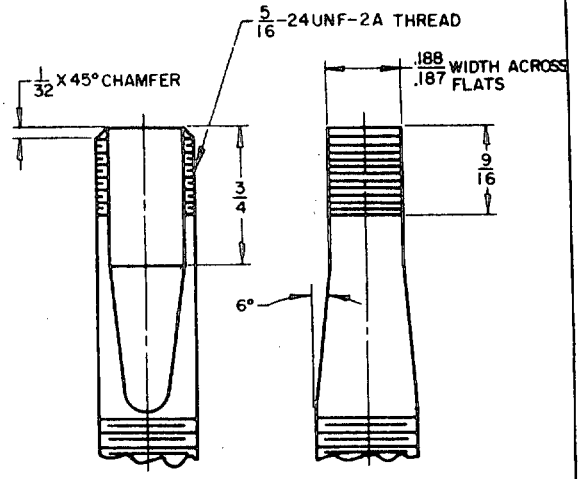


DETAIL B

Ⓐ

NOTES:

1. TYPE II, CLASS 1, OF PROCUREMENT SPECIFICATION.
2. MATERIAL: KNURLED DRIVER (DETAIL "A") - SINTERED IRON, TYPE II, COMPOSITION A , MIL-B-5687. CADMIUM PLATE, TYPE II, CLASS 3, QQ-P-416.
3. BEFORE PLATING, KNURLED DRIVER (DETAIL "A" ) SHALL RESIST 1700 LBS. COMPRESSION WITHOUT BREAKING WHILE MOUNTED ON MOTOR DRIVE SHAFT.
4. DRIVE SHAFT LENGTH SHALL BE ADJUSTABLE WITHIN A MINIMUM RANGE OF 1 TO 4 INCHES.
5. SHAFT THREAD PROTECTOR SHALL BE INDENTED IN INCREMENTS OF 1/2 INCH AND OF SUCH MATERIAL AS TO ALLOW CUTTING AT INDENTATIONS TO OBTAIN REQUIRED LENGTH AT ASSEMBLY. WHEN NECESSARY, PROTECTOR SHALL BE CUT AT THE UNTHREADED END.
6. CLEANING ARC SHALL BE AJUSTABLE WITHIN A MINIMUM RANGE OF 40 TO 140 DEGREES.
7. PARKING, INLET, AND EXHAUST PORTS SHALL BE IDENTIFIED BY STAMPING, CASTING, OR MOLDING.
8. LOCATION OF PARKING, INTAKE, AND EXHAUST PORTS OPTIONAL; HOWEVER, PORTS SHALL PROVIDE OPTIMUM ACCESS FOR CONNECTION WHEN MOTOR IS IN POSITION.
9. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES HANDBOOK H28.
10. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 ON FRACTIONS, ±.005 ON DECIMALS, ±1° ON ANGULAR DIMENSIONS.
11. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
12. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
13. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
14. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

APPROVED 3 JULY 1962 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| | | |
|---|---|---|
| P.A. ARMY-AT<br>Other Cust<br>AF- 84 | TITLE<br>MOTOR, WINDSHIELD WIPER, PNEUMATIC, UNIVERSAL | MILITARY STANDARD<br>MS 53017 |
| PROCUREMENT SPECIFICATION<br>MIL-M-12185 | SUPERSEDES: | SHEET 2 |

DD FORM SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-510/A-685

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.