

FED. SUP CLASS
1670

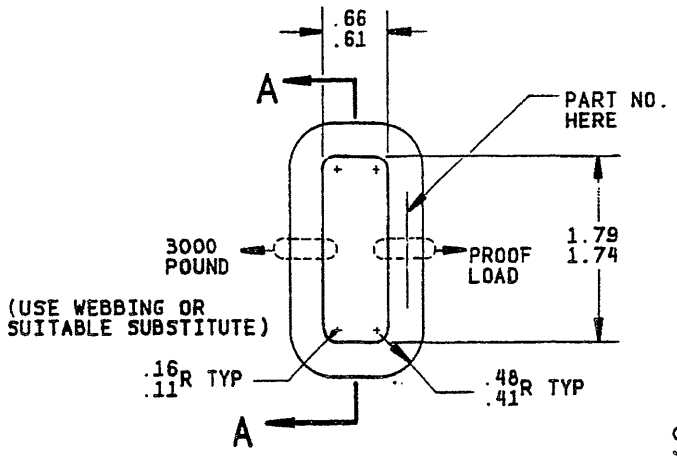

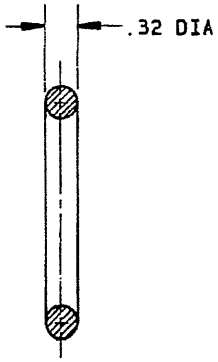

SECTION A-A

DASH NO.
-1
-2

NOTES:

MATERIAL: STEEL, MIL-S-5626 OR MIL-S-6049.

METHOD OF FORMING: HOT FORGE.

HEAT TREATMENT: 170,000 TO 190,000 LBS/SQ IN. TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-6875.

SURFACE ROUGHNESS: SHALL BE $\sqrt{125}$ MAX. IN ACCORDANCE WITH ANSI B46.1.

FINISH: -1 --- CADMIUM PLATE, QQ-P-416, CLASS 1, TYPE I. (AS AN ALTERNATE, THE COATING FOR THE -2 FINISH MAY BE USED.)
-2 --- COATING, IMMERSION ZINC FLAKE/CHROMATE DISPERSION PER MIL-C-87115, CLASS 3.

DIMENSIONS IN INCHES: EXCEPT AS OTHERWISE SPECIFIED HEREIN, TOLERANCES ± .03.

LINK SHALL BE SUBJECTED TO THE PROOF LOAD SPECIFIED HEREON, AS INDICATED BY THE ARROWS, IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 70108-1.

© REDRAWN, REVISED FINISH, ADDED SHEET 2.

APPROVED REVISED © 30 APRIL 1986

P. A. ARMY-GL Other Cust NAVY-AS USAF-99	INTERNATIONAL INTEREST	TITLE LINK, PARACHUTE CONNECTOR	MILITARY STANDARD MS 70108
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: AN 6562		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NO. 1670-0714

USER ACTIVITIES: ARMY-AV

REVIEWER ACTIVITIES: NAVY-MC USAF-82

AMSC N/A


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES: ARMY-AV
REVIEWER ACTIVITIES: NAVY-MC USAF-82
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
1670

END ITEM EXAMINATION
DIMENSION - FUNCTION TEST

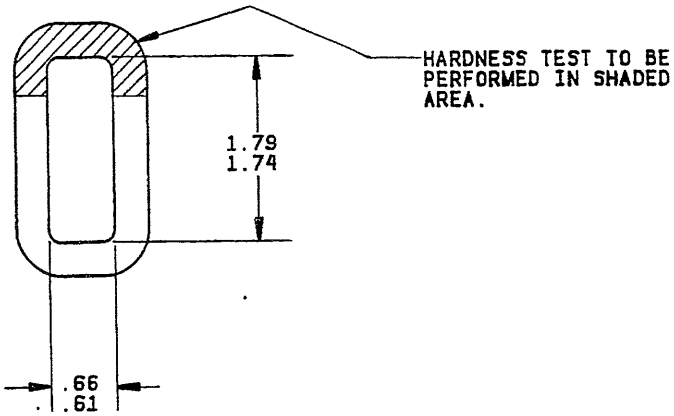

NOTES:

CRITICAL DIMENSIONS: AS SHOWN.

CRITICAL FUNCTION TEST: NONE.

© THIS SHEET ADDED.

REVISED © 30 APRIL 1986

APPROVED

P. A. ARMY-GL Other Cust NAVY-AS USAF-99	INTERNATIONAL INTEREST	TITLE LINK, PARACHUTE CONNECTOR	MILITARY STANDARD MS 70108
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: AN 6562		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.