INCH-POUND
MS75009J
w/ AMENDMENT 2
8 February 2007
SUPERSEDING
MS75009J
w/ AMENDMENT 1
21 April 2006

DETAIL SPECIFICATION SHEET

BRACKET ASSEMBLY, RESISTOR (POWER TYPE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issues of MIL-PRF-26, and MIL-R-19365.

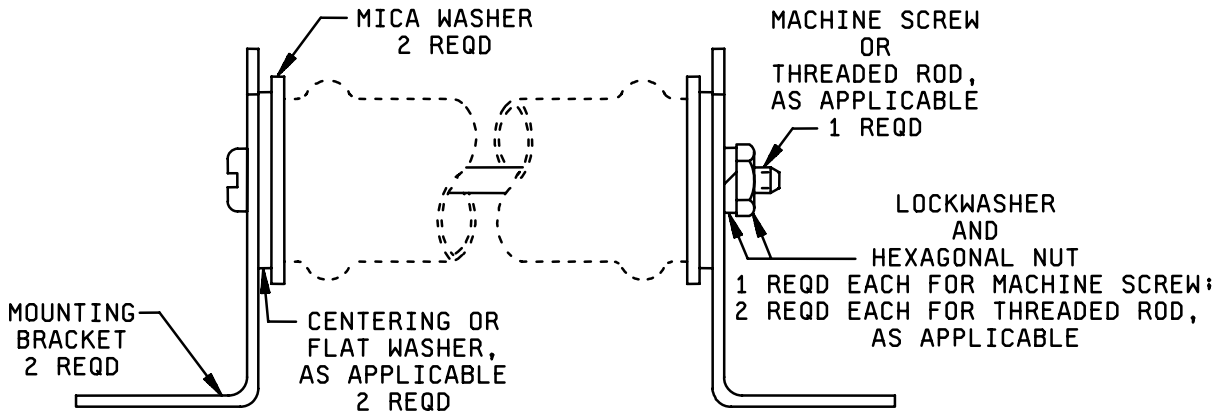


FIGURE 1. Bracket assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.

Assembly dash no. 1/	Resistor style		Dash number or MS part or identifying number (PIN)						
	Spec MIL-PRF-26	Spec MIL-R-19365	Mica washer	Centering washer	Flat washer		Mounting bracket	Pan head machine screw 2/	
					Part No. 3/	Dash No.		Part No.	Dash No.
-29	RW29	RX29	-1		MS27183	-7	-7	MS35206 4/	-255
-30	RW30		-2		MS27183	-7	-7	MS35206 4/	-252
-31	RW31		-2		MS27183	-7	-7	MS35206 4/	-254
-32	RW32	RX32	-2		MS27183	-7	-7	MS35206 4/	-256
-33	RW33	RX33	-2		MS27183	-7	-7	MS75009	-18
-34	RW34		-3	-5			-8	MS75009	-18
-35	RW35	RX35	-3	-5			-8	MS75009	-19
-36	RW36	RX36	-4	-6			-9	MS75009	-19
-37	RW37	RX37	-4	-6			-9	MS75009	-20
-38	RW38	RX38	-4	-6			-9	MS75009	-21
-39	RW39		-4	-6			-9	MS75009	-23
-47	RW47	RX47	-4	-6			-9	MS75009	-22


Assembly dash no. 1/	Resistor style		Dash number or MS part or identifying number (PIN)						
	Spec MIL-PRF-26	Spec MIL-R-19365	Threaded rod 2/		Hexagonal nut		Lock washer 5/		
							Corrosion resisting steel		Phosphor bronze
			Part No.	Dash No.	Part No. 6/	Dash No.	Part No. 7/	Dash No.	
-29	RW29	RX29			MS35649	-282	MS35338	-80	-16
-30	RW30				MS35649	-282	MS35338	-80	-16
-31	RW31				MS35649	-282	MS35338	-80	-16
-32	RW32	RX32			MS35649	-282	MS35338	-80	-16
-33	RW33	RX33	MS75009	-10	MS35649	-282	MS35338	-80	-16
-34	RW34		MS75009	-10	MS35649	-282	MS35338	-138 or -157	-17
-35	RW35	RX35	MS75009	-11	MS35650	-302	MS35338	-138 or -157	-17
-36	RW36	RX36	MS75009	-11	MS35650	-302	MS35338	-138 or -157	-17
-37	RW37	RX37	MS75009	-12	MS35650	-302	MS35338	-138 or -157	-17
-38	RW38	RX38	MS75009	-13	MS35650	-302	MS35338	-138 or -157	-17
-39	RW39		MS75009	-15	MS35650	-302	MS35338	-138 or -157	-17
-47	RW47	RX47	MS75009	-14	MS35650	-302	MS35338	-138 or -157	-17

1/ The dash number added to the military-specification number constitutes the MS PIN of the assembly. The dash number is derived from the style number of the resistor; for example, MS75009-29 is derived from RW29 and RX29.
2/ Use of either pan head machine screw or threaded rod optional, where applicable.
3/ Specification number is MS27183.
4/ Specification number is NASM35206.
5/ Use of either corrosion-resisting-steel or phosphor-bronze lock washer(s) is optional.
6/ Specification numbers are NASM35649 or NASM35650.
7/ Specification number is NASM35338.

NOTES:
1. Referenced documents shall be of the issue in effect on date of invitations for bid.
2. For design feature purposes, this specification sheet takes precedence over acquisition documents referenced herein.

FIGURE 1. Bracket assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.

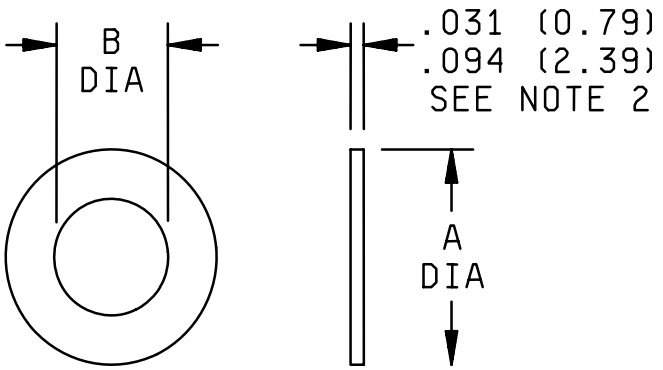

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.015	.38	.094	2.39	.469	11.91	.688	17.48	1.000	25.40
.031	.79	.195	4.95	.500	12.70	.750	19.05	1.375	34.93


Dash No. 1/	Mica washer dimension	
	A +.015 -.000	B +.015 -.000
-1	.469	.195
-2	.750	.195
-3	1.000	.500
-4	1.375	.688

1/ The dash number added to the military specification number constitutes the MS PIN; for example: MS75009-1.

NOTES
1. Dimensions are in inches. The washer may consist of several sheets to obtain minimum thickness.
2. Metric equivalents are given for general information only.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. For design feature purposes, this specification sheet takes precedence over acquisition documents referenced herein.

FIGURE 2. Mica washer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.

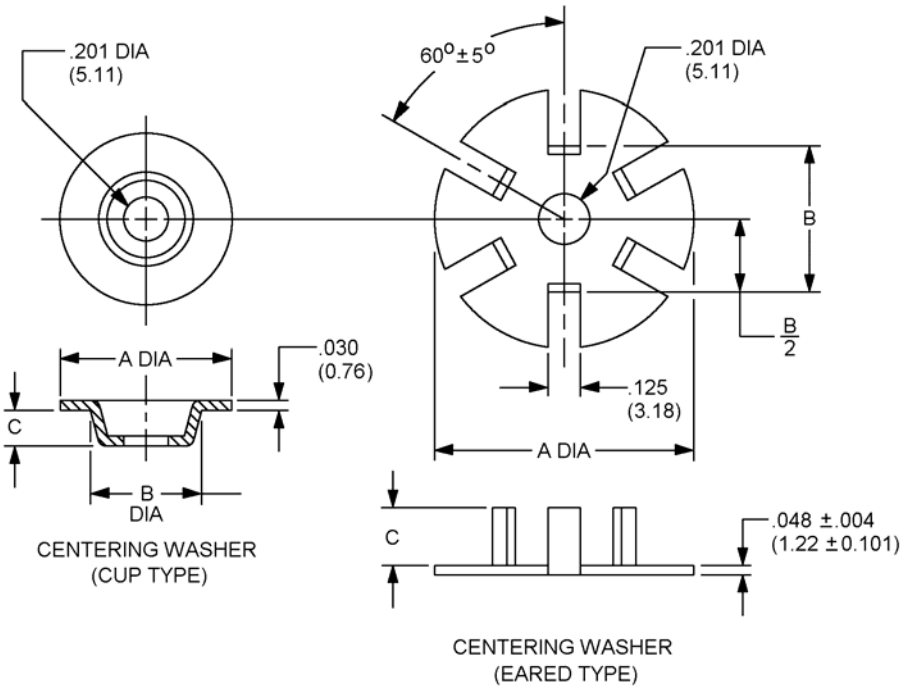

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.010	0.25	.045	1.14	.156	3.96	.463	11.76	.750	19.06
.031	0.79	125	3.18	.250	6.35	.684	17.37	1.125	25.58

Dash no. 1/	Type	Centering washer dimension		
		A	B	C
-5	Cup	.750	.463 +.005 -.000	.156
-6	Eared	1.125	.684	.250 ±.032


1/ The dash number added to the MS military specification number constitutes the MS part number; for example: MS75009-1.

NOTE:

1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerance is ±0.010 (0.25 mm) on decimals.
3. Centering washer shall be steel conforming to QQ-S-698, ASTM-A109/A109M, ASTM A1008/A1008M, or SAE-AMS5040, respectively.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.
5. For design feature purposes, this specification sheet takes precedence over acquisition documents referenced herein.

FIGURE 3. Centering washer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.

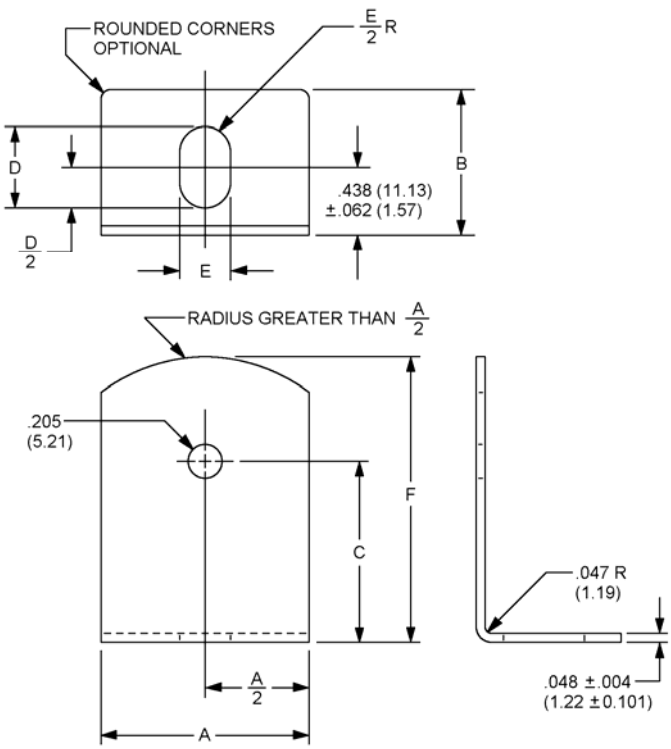

Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm
.031	0.79	.281	7.14	.562	14.27	1.000	25.40	1.500	38.10
.062	1.57	.438	11.13	.750	19.05	1.25	31.75	1.750	44.43
.219	5.56	.500	12.70	.875	22.23	1.375	34.93	2.125	53.98

Dash no. 1/	Mounting bracket dimensions					
	A ±.062	B ±.062	C ±.062	D ±.062	E ±.031	F ±.062
-7	.500	.750	1.00	.438	.219	1.375
-8	.750	.750	1.250	.438	.219	1.750
-9	1.250	.875	1.500	.562	.281	2.125


1/ The dash number added to the military-specification number constitutes the MS PIN; for example: MS75009-1.

NOTES

1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerance is ±0.005 (0.13 mm) on decimals.
3. Mounting bracket shall be steel conforming to QQ-S-698, ASTM-A109/A109M, ASTM A1008/A1008M, or SAE-AMS5040, respectively.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.
5. For design feature purposes, this specification sheet takes precedence over acquisition documents referenced herein.

FIGURE 4. Mounting bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.

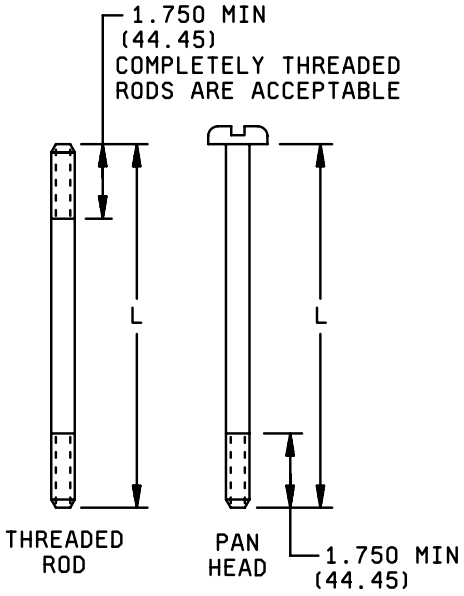

Inch	mm
.38	9.53
1.75	44.45
3.75	95.25
4.25	107.95
4.75	120.65
5.25	133.35
6.75	171.45
7.25	184.13
8.75	222.23
9.25	234.45
11.25	285.75
11.75	298.45
12.75	323.85
13.25	336.55


Pan head machine screw dash no. 1/	Threaded rod dash no. 1/	Dimensions		
		L 2/ (approx)		Screw thread
		Screw	Rod	
-18	-10	3.750	4.250	.164-32 UNC-2A (number 8)
-19	-11	4.760	5.250	.190-32 UNF-2A (number 10)
-20	-12	6.750	7.250	
-21	-13	8.750	9.250	
-22	-14	11.250	11.750	
-23	-15	12.750	13.250	

1/ The dash number added to the military-specification number constitutes the MS PIN; for example: MS75009-1.
2/ When assembled, not less than 1.5 threads nor more than 0.38 inch of thread shall extend beyond each nut.

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2 Unless otherwise specified, tolerance is ±0.005 (0.13 mm) on decimals.
3 Pan Head machine screws not covered by NASM35206 and threaded rods shall be carbon-steel ire or carbon steel conforming to ASTM-A108, ASTM-A575, ASTM-A576, ASTM-A1008/A1008M, or ASTM-A675, respectively.
4 Threaded parts shall be in accordance with FED-STD-H28.
5 Referenced documents shall be of the issue in effect on date of invitations for bid.
6 For design feature purposes, this specification sheet takes precedence over acquisition documents referenced herein.

FIGURE 5. Rods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.

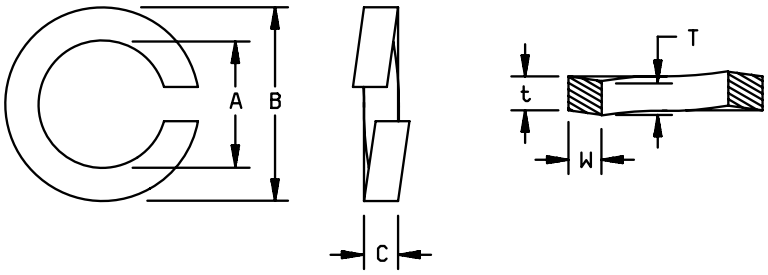

PHOSPHOR-BRONZE LOCKWASHER

Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm
.040	1.02	.055	1.40	.168	4.27	.194	4.93	.337	8.56
.046	1.17	.062	1.57	.178	4.52	.205	5.21		
.047	1.19	.164	4.17	.190	4.83	.296	7.52		

Dash No. 1/	Nominal size	Phosphor-bronze-lockwasher dimensions					
		A		B	$C = \frac{T+t}{2}$		W
		Max	Min	Max	Max	Min	Min
-16	No. 8 .164	.178	.168	.296	.046	.040	.055
-17	No. 10 .190	.205	.194	.337	.053	.047	.062

1/ The dash number added to the military-specification number constitutes the MS PIN; for example: MS75009-1.

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerance is ±0.005 (0.13 mm) on decimals.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. For design feature purposes, this specification sheet takes precedence over acquisition documents referenced herein.

FIGURE 6. Lockwasher.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Reference documents. This document references the following:

MIL-PRF-26	SAE-AMS5040
MIL-R-19365	ASTM-A108
MS27183	ASTM-A109/A109M
QQ-S-698	ASTM A1008/A1008M
FED-STD-H28	ASTM-A575
	ASTM-A576
NASM 35206	ASTM-A663/A663M
NASM 35338	ASTM-A675/A675M
NASM 35649	
NASM 35650	

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR
Navy - AS, MC, OS

Preparing activity:
DLA - CC

(Project 5905-2007-042)

NOTE: The activities listed above were interested in this document as of the date of this document, since organization and responsibilities can change; you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.