
Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
AF #11, 85, 17 @ 19, 14 Army #EL, MU Navy #WP, SH @ MC


FED. SUP CLASS
5950

CASE, MOUNTING, TERMINAL ARRANGEMENT, AND MARKING

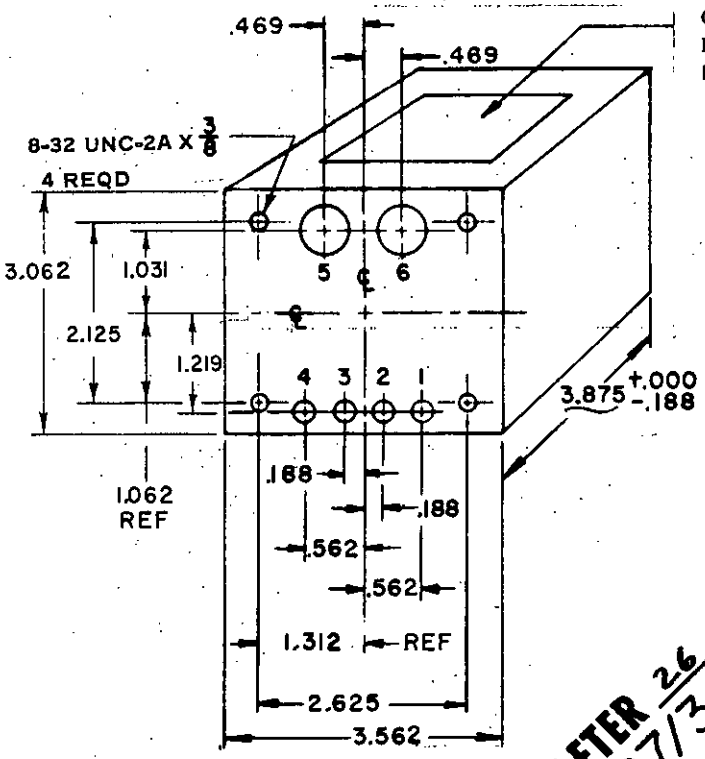

CIRCUIT DIAGRAM AND MARKING
READABLE WITH TRANSFORMER
IN THIS POSITION (SEE NOTE 5)


MINIMUM CHASSIS CUTOUT

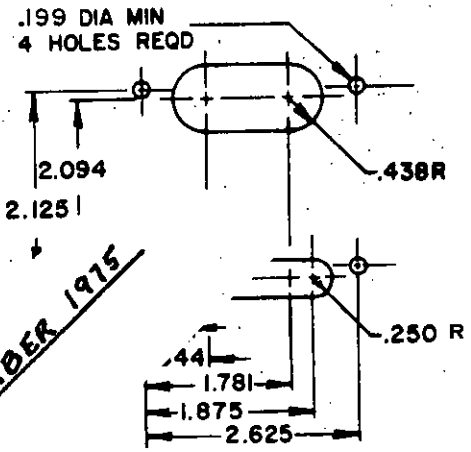

CANCELLED AFTER 26 NOVEMBER 1975
USE MIL-T-27/34

INCHES	MM	INCHES	MM
.156	3.96	1.2	
.188	4.78		
.199	5.05		
.250	6.35		
.438	11.13		
.469	11.91		.98
.562	14.27	2.	66.68
.750	19.05	3.0	77.77
.844	21.44	3.562	90.47
1.031	26.19	3.875	98.43
1.062	26.97	3/8	9.53

CIRCUIT DIAGRAM AND MARKING
60 CPS

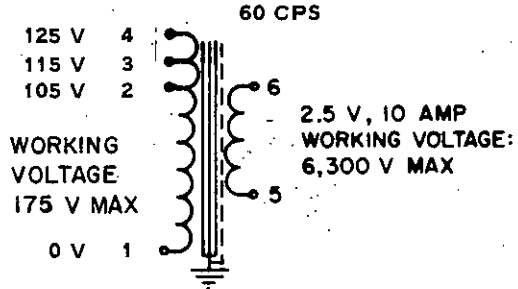

MAX ALTITUDE: 10,000 FT

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified, tolerance on overall case dimensions is +.000 (.00 mm), −.125 (3.18 mm).
3. Tolerance on mounting dimensions is ±.016 (.41 mm). Mounting studs are symmetrically located with respect to the centerlines of the case.
4. Tolerance on terminal positioning dimensions is ±.125 (3.18 mm). Terminals fit within minimum chassis cutout.
5. Type designation, MS part no. and manufacturer's name or code symbol to be marked on side opposite terminals.
6. Referenced document shall be of the issue in effect on date of invitations for bid.
7. For design feature purposes, this standard takes precedence over procurement document referenced herein.
8. Metric equivalents (to the nearest .01 millimeter) are shown for general information only and are based upon 1 inch = 25.4 mm.

MS PART NO.	MS90024-2

Ⓕ ENTIRE STANDARD REVISED

APPROVED 2 OCT 1952 REVISED Ⓐ 16 NOV 1953 Ⓑ 9 DEC 1955 Ⓒ 17 DEC 1956 Ⓓ 19 FEB 1960 Ⓔ 21 Sep 65 Ⓕ 26 NOV 1975

P.A. EL Other Cust. SH AF-11	TITLE TRANSFORMER, POWER, STEP-DOWN, TYPE TF4RXOIJBO12		MILITARY STANDARD MS 90024
Procurement Specification MIL-T-27	SUPERSEDES:		SHEET 1 OF 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing). AF Mil, 85, 17 @ 19, 14 Army MI EL, MU Navy MWP, SH @ MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 2 OCT 1952 REVISED (A) 16 NOV 1953 (B) 9 DEC 1955 (C) 17 DEC 1956 (D) 19 FEB 1960 (E) SEE SH. I. FOR CHANGES

FED. SUP CLASS
5950

ELECTRICAL RATING

Primary (1-2-3-4)	105/115/125 v; 60 cps, ±10%	Duty cycle	Continuous
Secondary (5-6)	2.5 v, 10 amp	Life expectancy	10,000 hr min
Working voltage (1-4)	175 v max	Altitude	10,000 ft max
Working voltage (5-6)	6300 v max	Operating temperature	105°C max

NOTE: When numbers in parentheses, eg (1-4), are used, they indicate the winding and the extreme terminals of the winding.

PHYSICAL CHARACTERISTICS

Case size	JB
Weight	4-3/4 lb max
Terminals	Solder lug, No. 16 AWG
Terminal height:	
Terminals 1, 2, 3, 4	.438(11.13 mm) $^{+.000(.00\ mm)}_{-.219(5.56\ mm)}$
Terminals 5, 6	1.250(31.75 mm) $^{+.000(.00\ mm)}_{-.625(15.88\ mm)}$
Shock	Method I, test condition C (50 G)

TEST	ELECTRICAL PROPERTIES			LIMITS
Dielectric withstanding voltage: At sea level	Windings	(1-4)	(5-6)	---
	Volts rms	1,500	10,000	
No load	With 115 v, 60 cps across (1-3): Current in (1-3): 0.110 amp rms Power in (1-3): 3.6 w Voltage across (5-6): 2.95 v Voltage across (1-2): 105 v Voltage across (1-4): 125 v			 Max Max Max ±1% ±1%
Rated load	Voltage across (5-6): 2.5 v with 115 v, 60 cps across (1-3) and 10.0 amp in (5-6), resistive load			±2%
Electrostatic shielding	Voltage ratio: 5 to 1 at 20 kc			Min
Polarity	Additive, with terminals 4 and 5 connected			---
Temperature rise	40°C with 105 v, 54 cps across (1-2) at an ambient temperature of 65°C			Max

P.A. EL Other Cust. SH	TITLE TRANSFORMER, POWER, STEP-DOWN, TYPE TF4RX01JB012	MILITARY STANDARD MS90024
Procurement Specification MIL-T-27	SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.