FED SUP CLASS
5340

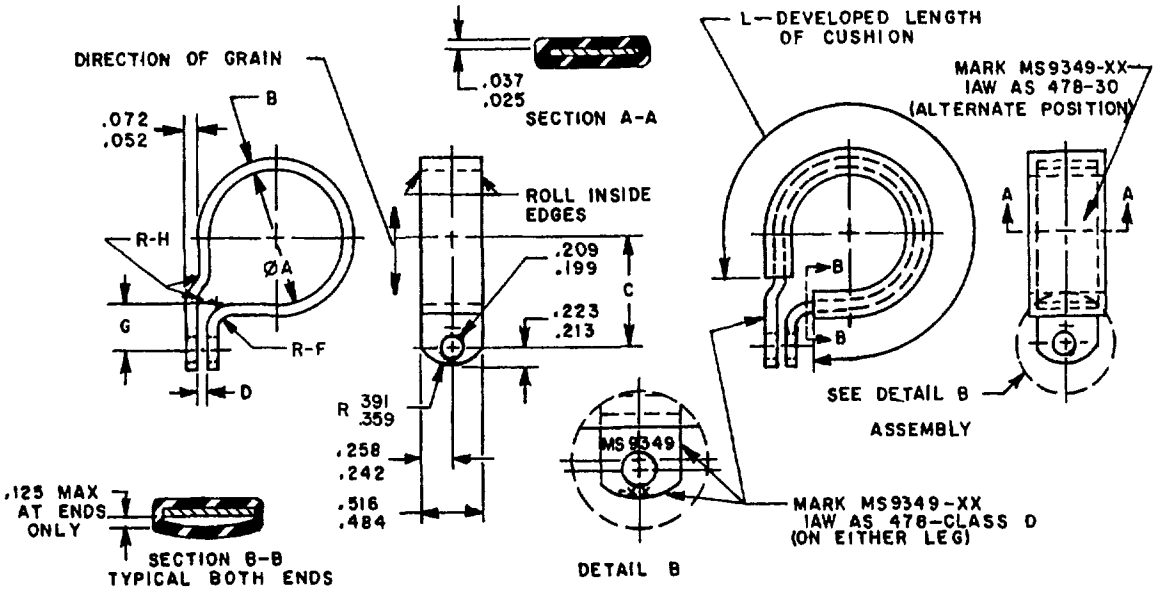


TABLE 1 DASH NUMBERS AND DIMENSIONS

DASH NUMBER	TUBE OUTSIDE DIAMETER NOM	ØA BASIC	B ±.006	C ±.010	D	F RADIUS ±.016	G ±.016	H RADIUS ±.016	L +.040 −.000	APPROX WEIGHT LB/100
-01	.125	.188	.031	.423	125-.141	.062	.312	.062	.505	.81
-02	188	.250	031	457	125- 141	062	.312	.062	.679	95
-03	.250	312	031	498	.125-.141	.062	.312	.062	908	1 12
-04	.312	375	.031	529	.125- 141	062	.312	062	1 097	1.27
-05	375	.438	031	.560	.125-.141	.062	312	.062	1.306	1 41
-06	438	.500	.031	592	125-.141	062	.312	.062	1.515	1 56
-07	500	.562	.031	.623	.125- 141	.062	.312	.062	1 724	1 72
-08	562	625	031	654	.125-.141	.062	312	062	1.930	1 86
-09	625	.688	.051	.752	.125-.141	109	.375	094	2.092	3 07
-10	688	750	.051	783	125- 141	109	375	094	2 299	3 28
-11	750	812	.051	814	125- 141	109	375	094	2 506	3 49
-12	.812	.875	.051	845	125-.141	.109	375	.094	2.721	3 71
-13	.875	938	051	877	125- 141	.109	.375	094	2 929	3 93
-14	938	1 000	051	908	125-.141	109	375	.094	3.136	4 13
-15	1 000	1 062	051	.939	.125- 141	109	.375	094	3 343	4 35
-16	1.062	1.125	051	970	125-.141	.109	375	094	3.555	4.56
-17	1 125	1 188	.051	1 002	125-.141	.109	375	.094	3.769	4 78
-18	1.188	1.250	.064	1 062	.156- 172	125	.406	.125	3 914	5.04
-19	1.250	1.312	.064	1 093	.156-.172	.125	.406	.125	4 125	5 30
-20	1.312	1.375	.064	1.125	.156- 172	.125	.406	125	4 339	5 56
-21	1.375	1 438	.064	1.156	.156-.172	.125	406	.125	4.551	5 81
-22	1.438	1.500	064	1 188	.156- 172	.125	.406	.125	4.754	7.07
-23	1.500	1.562	.064	1 219	.156- 172	125	406	125	5 006	7 44
-24	1.562	1.625	064	1.250	.156- 172	.125	406	.125	5.173	7.57
-25	1.625	1.688	.064	1.281	.156-.172	.125	.406	125	5 386	7 83
-26	1.688	1.750	064	1 312	156-.188	125	.406	.125	5 595	8.06
-27	1.750	1 812	064	1 344	156-.188	125	.406	125	5 798	8.32
-28	1.812	1 875	064	1 375	.156- 188	.125	406	.125	6.011	8 58
-29	1.875	1.938	.064	1.406	156-.188	.125	.406	.125	6.223	8.85
-30	1.938	2.000	.064	1.438	156- 188	.125	.406	.125	6 436	9 10
-31	2.000	2.062	.064	1.469	.156-.188	.125	.406	.125	6.643	9 34

Ⓑ ENTIRE STANDARD REVISED

P A NAVY-AS Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE CLAMP, LOOP, CUSHIONED, JOGGLED, CRES, .204 HOLE	MILITARY STANDARD MS9349
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1732

AMSC N/A

APPROVED 14 JAN 65 REVISED Ⓐ 29 FEB 68 Ⓑ 11 JUN 86

REVIEWER ACTIVITIES
DLA-IS

USER ACTIVITIES

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

REQUIREMENTS

1. MATERIAL: CLAMP-CORROSION RESISTANT STEEL IN ACCORDANCE WITH AMS 5510
CUSHION-POLYTETRAFLUOROETHYLENE IN ACCORDANCE WITH AMS 3651.

2. CLAMP FORM: CLAMP SHALL BE FORMED AS SHOWN. DIMENSION "D" SHALL FALL WITHIN THE SPECIFIED LIMITS WHEN CLAMP IS ASSEMBLED ON A BAR THE DIAMETER OF WHICH IS EQUAL TO THE NOMINAL TUBE OD WITHIN +.001. HOLES SHALL BE IN ALIGNMENT WITHIN .010 AND CLAMP SHALL BE FLAT WITHIN .010 THRU CLAMP WIDTH WHEN ASSEMBLED ON TEST BAR. IN THE FREE POSITION, CLAMP MAY SPRING OPEN PROVIDED THE ABOVE CONDITIONS ARE MET.

3. EDGES REMOVE BURRS AND SHARP EDGES.

4. PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS9349-01
DASH NUMBER
BASIC MS NUMBER

MS9349-01 INDICATES - CLAMP, LOOP, CUSHIONED, JOGGLED, CRES, .204 HOLE; TUBE OUTSIDE DIAMETER NOMINAL .125, BASIC DIAMETER 188.

NOTES:

1 ALL DIMENSIONS ARE IN INCHES

2. DO NOT USE UNASSIGNED PART NUMBERS.

3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.

6 AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 14 JAN 65 REVISED (B) FOR CHANGES SEE PAGE 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES: DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P A NAVY-AS Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE CLAMP, LOOP, CUSHIONED, JOGGLED, CRES, .204 HOLE	MILITARY STANDARD MS9349
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.