
MS9757 (ASG)

FED SUP CLASS
5305

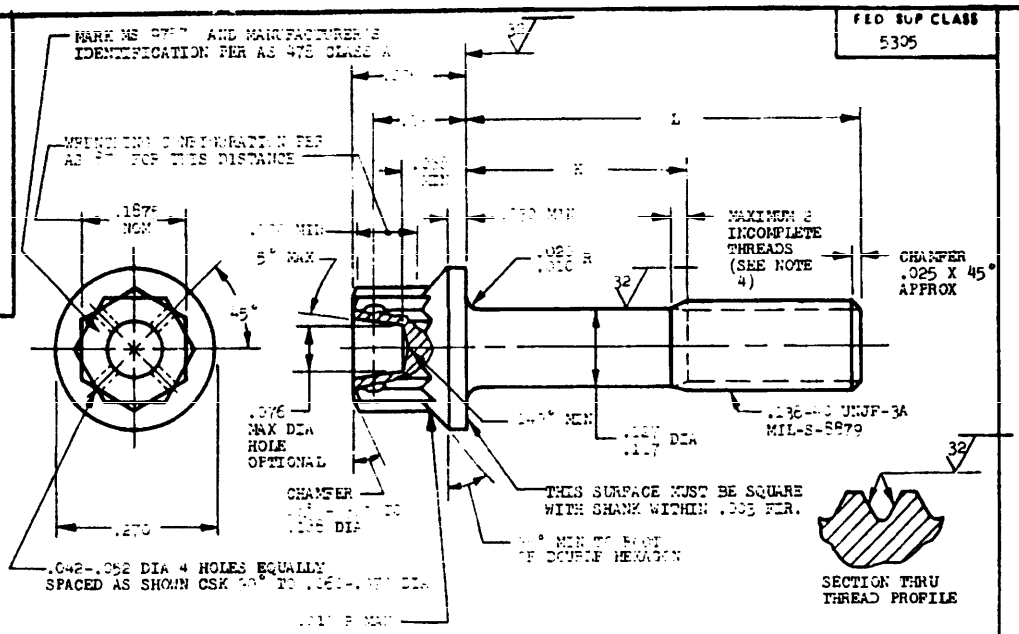

PART NO.	L	K	APPROX WEIGHT LB/100
MS9757-01	.188	.068-.076	.147
MS9757-02	.250	.068-.076	.158
MS9757-03	.312	.068-.076	.164
MS9757-04	.375	.068-.076	.181
MS9757-05	.438	.068-.076	.190
MS9757-06	.500	.068-.076	.204
MS9757-07	.562	.068-.076	.216
MS9757-08	.625	.068-.076	.227
MS9757-09	.688	.102-.162	.238
MS9757-10	.750	.164-.224	.250
MS9757-11	.812	.226-.286	.262
MS9757-12	.875	.288-.348	.274

PART NO.	L	K	APPROX WEIGHT LB/100
MS9757-13	.938	.350-.410	.286
MS9757-14	1.000	.412-.472	.297
MS9757-15	1.062	.474-.534	.308
MS9757-16	1.125	.536-.596	.320
MS9757-17	1.188	.598-.658	.332
MS9757-18	1.250	.660-.720	.343
MS9757-19	1.312	.722-.782	.355
MS9757-20	1.375	.784-.844	.366
MS9757-21	1.438	.846-.906	.378
MS9757-22	1.500	.908-.968	.390

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF SCREW LENGTH.
2. THE RUNOUT OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .004 FIR.
3. THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON IS SHALL BE WITHIN .004 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: TITANIUM AMS 4967.
6. HARDNESS: ROCKWELL C36-42.
7. MANUFACTURING SPECIFICATION: AMS 7461, EXCEPT MATERIAL AS NOTED.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2644.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

Review activities: NSAP-42, 85

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

APPROVED 3 Mar 69 REVISED

P.A.	TITLE	MILITARY STANDARD
USAF - 11 Other Cust Navy - A.	SCREW, MACHINE - DOUBLE HEXAG H EXT.RED WASHER HEAD, DRILLED,PI SHANK, TITANIUM AMS 4967, .1378-2 UNJF-3A	MS9757 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 JAN 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. Project No. 5305-F017

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:24Z
Check the source to verify that this is the current version before use.