
MS 9840

PED. SUP CLASS 5307

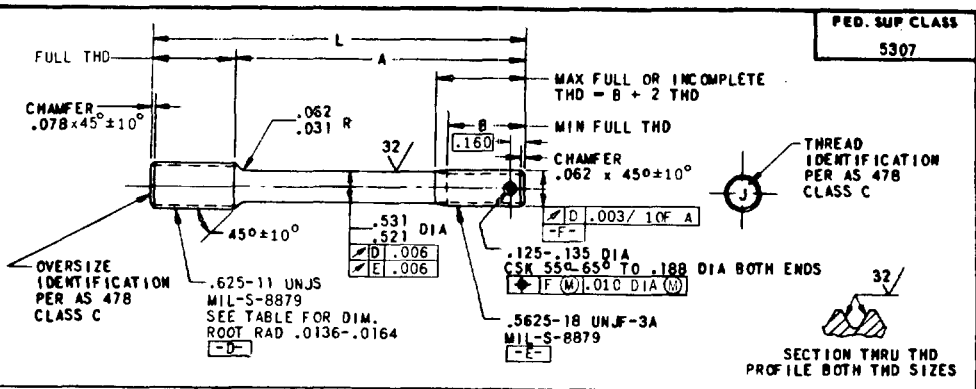

OVERSIZE IDENTIFICATION			STANDARD	+.003	+.006	+.009	+.012	STANDARD
			◯	(3)	(6)	(9)	(12)	
MAJOR DIAMETER			.620-.625	.620-.625	.620-.625	.629-.634	.629-.634	APPROX WEIGHT LBS/100
PD BEFORE PLATING			.5712-.5722	.5742-.5752	.5772-.5782	.5802-.5812	.5832-.5842	
PD AFTER PLATING			.5717-.5732	.5747-.5762	.5777-.5792	.5807-.5822	.5837-.5852	
PD LEAD THREAD			.5640-.5660	.5670-.5690	.5700-.5720	.5730-.5750	.5760-.5780	
MINOR DIA			.5203-.5273	.5233-.5303	.5263-.5333	.5293-.5363	.5323-.5393	
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	
2.188	.938	.812	MS9840-011	MS9840-012	MS9840-013	MS9840-014	MS9840-015	14.69
2.250	1.000	.875	MS9840-016	MS9840-017	MS9840-018	MS9840-019	MS9840-020	15.07
2.312	1.062	.938	MS9840-021	MS9840-022	MS9840-023	MS9840-024	MS9840-025	15.46
2.375	1.125	1.000	MS9840-026	MS9840-027	MS9840-028	MS9840-029	MS9840-030	15.84
2.438	1.188	1.000	MS9840-031	MS9840-032	MS9840-033	MS9840-034	MS9840-035	16.23
2.500	1.250	1.000	MS9840-036	MS9840-037	MS9840-038	MS9840-039	MS9840-040	16.61
2.562	1.312	1.000	MS9840-041	MS9840-042	MS9840-043	MS9840-044	MS9840-045	17.00
2.625	1.375	1.000	MS9840-046	MS9840-047	MS9840-048	MS9840-049	MS9840-050	17.38
2.688	1.438	1.000	MS9840-051	MS9840-052	MS9840-053	MS9840-054	MS9840-055	17.77
2.750	1.500	1.000	MS9840-056	MS9840-057	MS9840-058	MS9840-059	MS9840-060	18.15
2.812	1.562	1.000	MS9840-061	MS9840-062	MS9840-063	MS9840-064	MS9840-065	18.54
2.875	1.625	1.000	MS9840-066	MS9840-067	MS9840-068	MS9840-069	MS9840-070	18.92
2.938	1.688	1.000	MS9840-071	MS9840-072	MS9840-073	MS9840-074	MS9840-075	19.31
3.000	1.750	1.000	MS9840-076	MS9840-077	MS9840-078	MS9840-079	MS9840-080	19.69
3.125	1.875	1.000	MS9840-081	MS9840-082	MS9840-083	MS9840-084	MS9840-085	20.46
3.250	2.000	1.000	MS9840-086	MS9840-087	MS9840-088	MS9840-089	MS9840-090	21.23
3.375	2.125	1.000	MS9840-091	MS9840-092	MS9840-093	MS9840-094	MS9840-095	22.00
3.500	2.250	1.000	MS9840-096	MS9840-097	MS9840-098	MS9840-099	MS9840-100	22.77
3.625	2.375	1.000	MS9840-101	MS9840-102	MS9840-103	MS9840-104	MS9840-105	23.54
3.750	2.500	1.000	MS9840-106	MS9840-107	MS9840-108	MS9840-109	MS9840-110	24.31
3.875	2.625	1.000	MS9840-111	MS9840-112	MS9840-113	MS9840-114	MS9840-115	25.08
4.000	2.750	1.000	MS9840-116	MS9840-117	MS9840-118	MS9840-119	MS9840-120	25.85
4.125	2.875	1.000	MS9840-121	MS9840-122	MS9840-123	MS9840-124	MS9840-125	26.62
4.250	3.000	1.000	MS9840-126	MS9840-127	MS9840-128	MS9840-129	MS9840-130	27.39
4.375	3.125	1.000	MS9840-131	MS9840-132	MS9840-133	MS9840-134	MS9840-135	28.16
4.500	3.250	1.000	MS9840-136	MS9840-137	MS9840-138	MS9840-139	MS9840-140	28.93
4.625	3.375	1.000	MS9840-141	MS9840-142	MS9840-143	MS9840-144	MS9840-145	29.70
4.750	3.500	1.000	MS9840-146	MS9840-147	MS9840-148	MS9840-149	MS9840-150	30.47
4.875	3.625	1.000	MS9840-151	MS9840-152	MS9840-153	MS9840-154	MS9840-155	31.24
5.000	3.750	1.000	MS9840-156	MS9840-157	MS9840-158	MS9840-159	MS9840-160	32.01
5.125	3.875	1.000	MS9840-161	MS9840-162	MS9840-163	MS9840-164	MS9840-165	32.78
5.250	4.000	1.000	MS9840-166	MS9840-167	MS9840-168	MS9840-169	MS9840-170	33.55
5.375	4.125	1.000	MS9840-171	MS9840-172	MS9840-173	MS9840-174	MS9840-175	34.32
5.500	4.250	1.000	MS9840-176	MS9840-177	MS9840-178	MS9840-179	MS9840-180	35.09
5.625	4.375	1.000	MS9840-181	MS9840-182	MS9840-183	MS9840-184	MS9840-185	35.86
5.750	4.500	1.000	MS9840-186	MS9840-187	MS9840-188	MS9840-189	MS9840-190	36.63
5.875	4.625	1.000	MS9840-191	MS9840-192	MS9840-193	MS9840-194	MS9840-195	37.40
6.000	4.750	1.000	MS9840-196	MS9840-197	MS9840-198	MS9840-199	MS9840-200	38.17
6.125	4.875	1.000	MS9840-201	MS9840-202	MS9840-203	MS9840-204	MS9840-205	38.94
6.250	5.000	1.000	MS9840-206	MS9840-207	MS9840-208	MS9840-209	MS9840-210	39.71

1. MATERIAL: STEEL, AMS 6320, AMS 6322 OR AMS 6327
2. HARDNESS: ROCKWELL C26-32.
3. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
4. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
5. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1966.
6. MANUFACTURING SPECIFICATION: AMS 7456 EXCEPT THREAD FORM.
7. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
8. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010.
10. MARK PART NUMBER AND MANUFACTURERS IDENTIFICATION ON CONTAINER.
11. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 27 Aug 71 REVISED

This standard has been approved by the Dept. of the Air Force and the Department of the Navy and is mandatory for use by the activity. All other military activities are required to employ this standard where suitable.

Review activities: Air Force - 82

P.A. Air Force - 11 Other Coast Navy - AS	TITLE STUD-STEPPED, DRILLED, 2 DIA ENGAGEMENT, STEEL .625-11 UNJS x .5625-18 UNJF	MILITARY STANDARD MS9840
PROCUREMENT SPECIFICATION AMS 7456	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-159/2845

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.