
MS9879

FED. SUP CLASS
4730

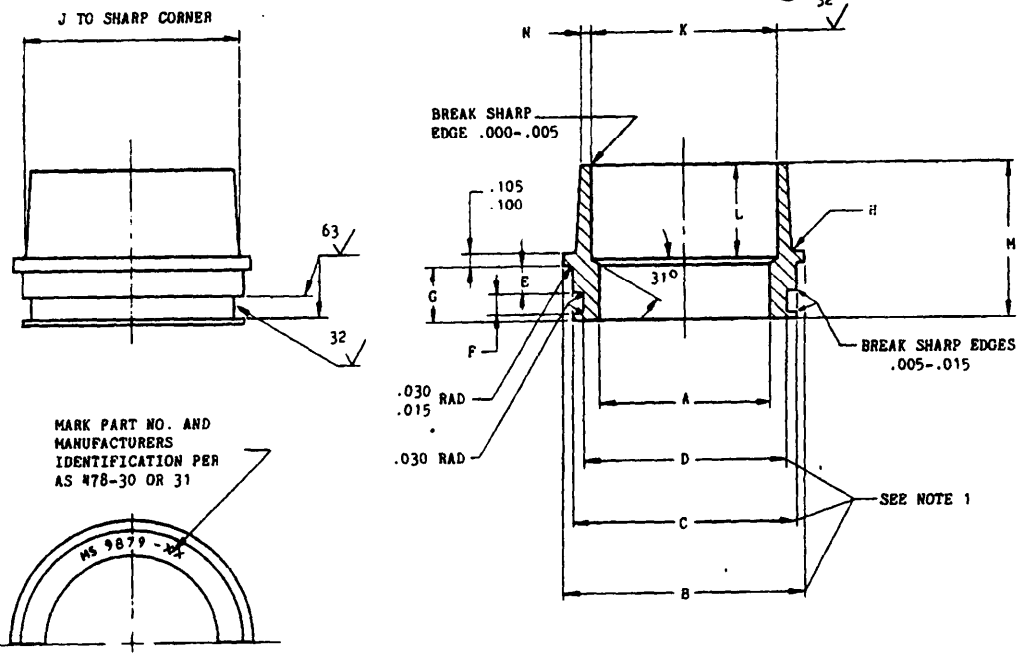

PART NUMBER	TUBE OD NOMINAL	A DIA ±.005	B DIA +.005 -.000	C DIA +.000 -.002	D DIA +.002 -.000	E +.005 -.000	F +.010 -.000	G +.010 -.000	H RAD	J DIA +.000 -.010	K DIA +.002 -.000	L	M	N +.000 -.010	APPROX WEIGHT LBS/EA
MS9879-04	.250	.180	.598	.351	.244	.115	.114	.292	.015-.030	.325	.240	.376	.668	.020	.01
MS9879-05	.312	.242	.660	.413	.306	.115	.114	.292	.015-.030	.387	.302	.376	.668	.020	.01
MS9879-06	.375	.305	.723	.476	.369	.115	.114	.292	.015-.030	.450	.365	.376	.668	.020	.02
MS9879-08	.500	.430	.848	.601	.494	.115	.114	.292	.015-.030	.575	.489	.432	.724	.020	.03
MS9879-10	.625	.555	.973	.726	.619	.115	.114	.292	.015-.030	.700	.614	.479	.771	.020	.03
MS9879-12	.750	.680	1.168	.910	.760	.139	.155	.359	.015-.030	.875	.739	.510	.869	.020	.05
MS9879-14	.875	.777	1.359	1.081	.865	.182	.223	.478	.030-.050	1.000	.864	.510	.988	.020	.08
MS9879-16	1.000	.902	1.484	1.206	.990	.182	.223	.478	.030-.050	1.125	.989	.510	.988	.035	.09
MS9879-18	1.125	1.027	1.609	1.331	1.115	.182	.223	.478	.030-.050	1.250	1.114	.510	.988	.035	.11
MS9879-20	1.250	1.152	1.734	1.456	1.240	.182	.223	.478	.030-.050	1.375	1.239	.510	.988	.035	.11
MS9879-24	1.500	1.402	1.984	1.706	1.490	.182	.223	.478	.030-.050	1.625	1.484	.510	.988	.035	.14
MS9879-28	1.750	1.652	2.238	1.960	1.744	.182	.223	.478	.030-.050	1.875	1.734	.510	.988	.035	.16
MS9879-32	2.000	1.902	2.488	2.210	1.994	.182	.223	.478	.030-.050	2.125	1.984	.510	.988	.035	.18
MS9879-40	2.500	2.402	2.988	2.710	2.494	.182	.223	.478	.030-.050	2.625	2.484	.510	.988	.035	.23
MS9879-48	3.000	2.884	3.493	3.215	2.999	.182	.223	.478	.030-.050	3.156	2.984	.510	.988	.035	.29
MS9879-56	3.500	3.384	3.993	3.715	3.499	.182	.223	.478	.030-.050	3.656	3.479	.510	.988	.035	.35
MS9879-64	4.000	3.884	4.493	4.215	3.999	.182	.223	.476	.030-.050	4.156	3.979	.510	.988	.035	.40

1. DIA D SHALL BE CONCENTRIC WITH DIA C WITHIN .0025 FIR AND DIA B SHALL BE CONCENTRIC WITH DIA C WITHIN .005 FIR
2. MATERIAL: CORROSION RESISTANT STEEL AMS 5646
3. SURFACE TEXTURE B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES
4. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°
6. DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SOCIETY OF AUTOMATIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 24 MAR 1967 REVISED (A) 6 APR 1983

This standard has been approved by the Naval Air Systems Command and the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Review activities:
USAF-11
NAVY-AS

P.A. USAF-11 Other Cust NAVY-AS	TITLE SLEEVE, SWIVEL-PILOTED O-RING TUBE CONNECTION, BRAZING, AMS 5646	MILITARY STANDARD MS 9879
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 87 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Project No. 4730- F554

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.