MS9951

FED SUP CLASS
5310

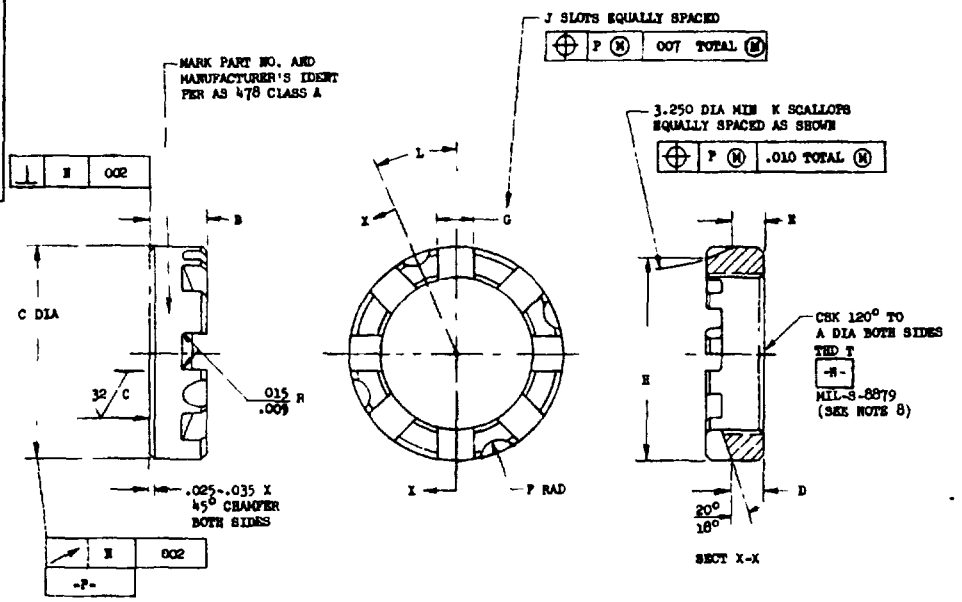


TABLE A

THREAD DIMENSIONS FOR UNJS-3B				
DASH NO	T THREAD	MINOR DIAMETER	PITCH DIAMETER	MAJOR DIAMETER MIN
-29	2 0625-16 UNJS-3B	2.0017-2.0102	2 0219-2 0271	2.0625
-31	2.1875-16 UNJS-3B	2.1267-2 1352	2 1469-2 1521	2 1875
-33	2.3125-16 UNJS-3B	2 2517-2 2602	2 2719-2 2773	2 3125
-35	2 4375-16 UNJS-3B	2.3767-2 3852	2 3969-2 4023	2 4375
-37	2 5625-16 UNJS-3B	2 5017-2 5102	2 5219-2 5273	2 5625

1 MATERIAL STEEL AMS 6322 OR AMS 6323
2 HARDNESS ROCKWELL C26-32.
3 MAGNETIC PARTICLE INSPECTION PER AMS 2640
4 SURFACE TEXTURE USAS B46 1 1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES
5 DIMENSIONING AND TOLERANCING USAS Y14.5-1966
6. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
7. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 2°
8 SEE TABLE A FOR DIMENSIONS OF THREADS NOT LISTED IN MIL-S-8879
9 DO NOT USE UNASSIGNED PART NOS

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 29 June 70 REVISED

PA Air Force - 11 Other Cust Navy - AS	TITLE NUT, SPANNER-END SLOTS, CUPWASHER LOCKED, STEEL AMS 6322 MIL-S-8879	MILITARY STANDARD MS9951
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 REP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This standard has been approved by the Department of the Air Force and the Navy(AS)and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

Review activities
Air Force - 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.

MS9951

FED SUP CLASS 5310

PART NUMBER	T THREAD	A +.015 -.000	B +.000 -.015	C +.000 -.006	D +.010 -.010	E +.010 - 010	F +.010 -.010	G +.010 -.000	H +.005 -.010	J	K	L ± 1°0'	APPROX WEIGHT LB/100
MS9951-02	.3750-32 UNJEF-3B	.375	.300	598	.170	.170	094	.125	.525	4	4	45°	1.33
MS9951-03	.4375-28 UNJEF-3B	.438	300	.748	.170	.170	.094	.125	.675	6	3	30°	2.13
MS9951-04	.5000-28 UNJEF-3B	.500	.300	798	.170	.170	.094	.125	725	6	3	30°	2.28
MS9951-05	.5625-24 UNJEF-3B	.562	.300	.858	.170	170	094	125	785	6	3	30°	2.42
MS9951-06	.6250-24 UNJEF-3B	.625	.300	.923	.170	.170	.094	.187	.850	6	3	30°	2.62
MS9951-07	.6875-24 UNJEF-3B	.688	300	998	.170	170	.094	187	.925	6	3	30°	3.06
MS9951-08	7500-20 UNJEF-3B	.750	.300	1.073	.170	.170	094	187	1.000	6	3	30°	3.47
MS9951-09	.8125-20 UNJEF-3B	.812	.300	1.133	.170	.170	.094	.187	1.060	8	4	22° 30'	3.50
MS9951-10	.8750-20 UNJEF-3B	.875	.300	1 198	.170	.170	094	.187	1.125	8	4	22° 30'	3.86
MS9951-11	.9375-20 UNJEF-3B	.938	.300	1.273	.170	.170	.094	187	1.200	8	4	22° 30'	4.28
MS9951-12	1.0000-20 UNJEF-3B	1.000	.300	1.348	.170	.170	094	187	1.275	8	4	22° 30'	4.78
MS9951-13	1.0625-18 UNJEF-3B	1.062	.325	1 408	185	.195	094	.187	1.335	8	4	22° 30'	5.50
MS9951-14	1.1250-18 UNJEF-3B	1.125	.325	1.473	.185	.195	.094	187	1.400	8	4	22° 30'	5 89
MS9951-15	1.1875-18 UNJEF-3B	1.188	.325	1.548	.185	.195	.094	250	1.475	8	4	22° 30'	6.12
MS9951-16	1.2500-18 UNJEF-3B	1.250	.325	1.623	.185	.195	.094	.250	1.550	8	4	22° 30'	6.68
MS9951-17	1.3125-18 UNJEF-3B	1.312	.325	1.683	.185	.195	.094	250	1 610	8	4	22° 30'	6.95
MS9951-18	1.3750-18 UNJEF-3B	1.375	.325	1.748	.185	.195	094	250	1.675	8	4	22° 30'	7.42
MS9951-19	1.4375-18 UNJEF-3B	1.438	.325	1.823	185	.195	.094	250	1.750	8	4	22° 30'	8.07
MS9951-20	1.5000-18 UNJEF-3B	1.500	.325	1.898	185	.150	.125	250	1 800	10	5	18°	8.44
MS9951-21	1 5625-16 UNJ -3B	1.562	.325	1.958	.185	.150	125	.250	1.860	10	5	18°	8.68
MS9951-22	1.6250-16 UNJ -3B	1.625	.325	2.023	.185	.150	125	250	1.925	10	5	18°	9.28
MS9951-23	1.6875-16 UNJ -3B	1.688	.325	2.098	.175	.150	.125	250	2.000	10	5	18°	9 58
MS9951-24	1.7500-16 UNJ -3B	1.750	325	2.173	175	.150	125	250	2.075	10	5	18°	10.38
MS9951-25	1.8125-16 UNJ -3B	1.812	.325	2.233	.175	150	125	250	2.135	10	5	18°	10.76
MS9951-26	1.8750-16 UNJ -3B	1.875	.325	2.298	.175	.150	.125	250	2.200	10	5	18°	11.32
MS9951-27	1.9375-16 UNJ -3B	1.938	.325	2 373	.175	150	.125	312	2 275	10	5	18°	11 42
MS9951-28	2 0000-16 UNJ -3B	2.000	.325	2.448	.175	.150	.125	312	2.350	10	5	18°	12 22
MS9951-29	2.0625-16 UNJS -3B	2.062	.375	2.480	210	200	.125	312	2.385	10	5	18°	13 78
MS9951-30	2 1250-16 UNJ -3B	2 125	375	2.545	.210	.200	.125	312	2.450	10	5	18°	14 29
MS9951-31	2.1875-16 UNJS -3B	2.188	.375	2.620	.210	.200	.125	312	2.525	10	5	18°	15.20
MS9951-32	2.2500-16 UNJ -3B	2.250	.375	2.695	.210	200	125	312	2 600	10	5	18°	16 30
MS9951-33	2.3125-16 UNJS -3B	2.312	.375	2.755	.210	.200	125	375	2 660	10	5	18°	15.90
MS9951-34	2.3750-16 UNJ -3B	2.375	.375	2.820	.210	.200	125	375	2.725	10	5	18°	16 42
MS9951-35	2.4375-16 UNJS -3B	2.438	.375	2.895	.210	.200	.125	375	2 800	10	5	18°	17 52
MS9951-36	2.5000-16 UNJ -3B	2.500	.375	2.970	.210	.155	.187	.375	2 850	10	5	18°	18.50
MS9951-37	2.5625-16 UNJS -3B	2.562	.375	3.030	.210	.155	.187	375	2.910	10	5	18°	18.90
MS9951-38	2.6250-16 UNJ -3B	2.625	.375	3.095	.210	.155	.187	.375	2.975	10	5	18°	19.60
MS9951-39	2.7500-16 UNJ -3B	2.750	.375	3.245	.205	.155	.187	375	3.125	10	5	18°	21 60
MS9951-40	2.8750-16 UNJ -3B	2.875	.375	3.370	.205	.155	187	.375	3.250	10	5	18°	22.72
MS9951-41	3.0000-16 UNJ -3B	3.000	.375	3.520	.205	.155	.187	375	3.400	10	5	18°	25.10

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 29 June 70 REVISED

PA Air Force – 11 Other Cust Navy – AS	TITLE NUT, SPANNER - RED SLOTS, CUPWASHER LOCKED, STEEL AMS 6322 MIL-S-8879	MILITARY STANDARD MS9951
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U S GOVERNMENT PRINTING OFFICE: 1970-433-691/2179

This standard has been approved by the Department of the Air Force and the Navy(AS) and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

Review activities Air Force – 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.