This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DD FORM 1 SEP 57 672-1 COORDINATED

PROCUREMENT SPECIFICATION: NONE

P.A. SHIPS
Other Cust
TC

SUPERSEDES:

TITLE (B)

CLEATS, ROPE, HOLLOW, MARINE HARDWARE


SHEET 1 OF 1

MS 15170

MILITARY STANDARD

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

(Project 2040-0037)

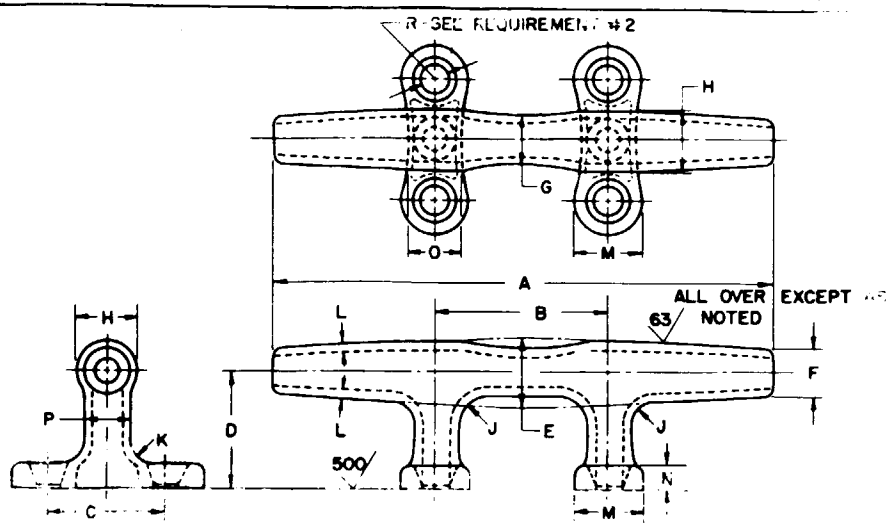

(B)

MS part number	Size of cleat	Dimensions of hollow cleats and bolts (inches) 1/															
		A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	R 2/
MS15170-1	8	8	3-1/16	1-1/2	1-3/8	1-1/4	9/16	5/8	13/16	1/2	1/4	1/8	1	5/16	3/4	3/4	5/16
MS15170-2	9	9	3-1/8	2-1/8	2-1/8	1-1/4	13/16	7/8	1- 1/8	1/2	3/8	5/32	1-1/4	7/16	1	13/16	3/8
MS15170-3	10	10	3-1/2	2-1/4	2-9/16	1-3/8	7/8	1	1- 3/16	1/2	3/8	5/32	1-1/4	7/16	1	13/16	3/8
MS15170-4	12	12	4	2-3/8	3	1-1/2	1	1-1/8	1- 5/16	5/8	3/8	3/16	1-3/8	1/2	1-1/8	1	1/2
MS15170-5	15	15	5	2-5/8	3-1/4	1-1/2	1	1-1/8	1- 5/16	5/8	3/8	3/16	1-3/8	1/2	1-1/8	1	1/2

1/Tolerances in inches:

Length of horns	±1/4
Other dimensions (except holes)	±1/32
Holes (bolt)	+1/32 -0

2/R = Diameter of holding down bolts.

(B) 1. Hollow cleats shall be commercial bronze with a tensile strength of not less than 30, 000 pounds per square inch.

2. Drill for bolts called for in dimension table, R column, and countersink to fit commercial standard countersunk head type bolts.

3. Remove all burrs and sharp edges and finish as indicated on detail.

(B) 4. Sizes 10, 12, and 15 hollow cleats normally secured to deck over pad (see Standard MS15171). Used for securing, (belaying), boat handling lines or rope.

5. For surface roughness, see Standard MIL-STD-10.

(B) 6. Referenced documents shall be of the issue in effect on date of invitation for bids.

(B) 7. For design feature purposes, this standard takes precedence over documents referenced herein.

APPROVED 9 JUL 1952 REVISED (A) 22 JUN 1953 (B) 15 JULY 1960

FED. SUP CLASS 2040

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:46Z
Check the source to verify that this is the current version before use.