
REVIEWER SYMBOLS: USAF - 71,82 DLA - CS
USER SYMBOLS: ARMY - GL

FED. SUP CLASS
4730

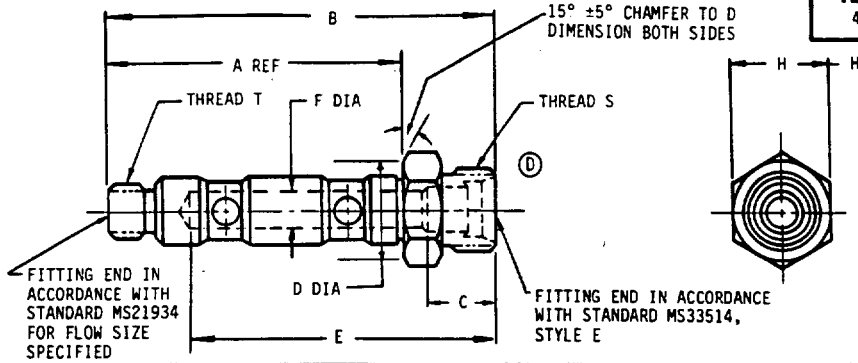

LOW FLOW SIZE DASH NUMBER	TUBE OD	THREAD S MIL-S-8879	THREAD T MIL-S-8879	A REF	B	C ±.062	D +.000 -.015	E ±.062	F ±.003	H HEX	WT LB MAX
-3L	3/16	.3750-24 UNJF-3A	.4375-20 UNJF-3A	2.531	3.265	---	.621	2.568	.125	.621 / .628	
-4L	1/4	.4375-20 UNJF-3A	.4375-20 UNJF-3A		3.328	---	.684	2.653	.187	.684 / .691	.020
-5L	5/16	.5000-20 UNJF-3A	.4375-20 UNJF-3A		3.390	---	.746	2.715	.234	.746 / .753	.022
-6L	3/8	.5625-18 UNJF-3A	.4375-20 UNJF-3A		3.437	.663	.871	2.725		.871 / .878	.019
-8L	1/2	.7500-16 UNJF-3A	.4375-20 UNJF-3A		3.530	.656	.996	2.780		.996 / 1.003	.029

HIGH FLOW SIZE DASH NUMBER	TUBE OD	THREAD S MIL-S-8879	THREAD T MIL-S-8879	A REF	B	C ±.062	D +.000 -.015	E ±.062	F ±.003	H HEX	WT LB MAX
-6H	3/8	.5625-18 UNJF-3A	.5625-18 UNJF-3A	2.969	3.875	---	.871	3.162	.297	.871 / .878	.050
-8H	1/2	.7500-16 UNJF-3A	.5625-18 UNJF-3A		3.968	---	.996	3.218	.422	.996 / 1.003	
-10H	5/8	.8750-14 UNJF-3A	.5625-18 UNJF-3A		4.031	.812	1.121	3.242		1.121 / 1.128	.055

REQUIREMENTS: (D)

1. MATERIAL: ALUMINUM ALLOY - BARS. SEE PROCUREMENT SPECIFICATION.
2. FINISH: SEE PROCUREMENT SPECIFICATION.
   SURFACE FINISH IN ACCORDANCE WITH ANSI B46.1.
   ALL OUTSIDE MACHINED SURFACES 125 MICROINCHES Ra. ALL INSIDE 250 Ra UNLESS OTHERWISE NOTED.

NOTES: (D)

1. FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS.
2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMAL ±.010, ANGLES ±1/2°.
3. PART NUMBERS:
   NO CODE LETTER IN PART NUMBER FOR ALUMINUM ALLOY (2024).
   ADD "W" IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).
   EXAMPLES OF PART NUMBERS:
   MS21940-8L - BOLT, 1/2 TUBING, LOW FLOW, ALUMINUM ALLOY (2024).
   MS21940W8L - BOLT, 1/2 TUBING, LOW FLOW, ALUMINUM ALLOY (7075).
4. INSTALLATION IN ACCORDANCE WITH MS21931.
5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
6. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

INACTIVE FOR NEW DESIGN AFTER 31 DEC : 1989 (D)

(D) DENOTES CHANGES

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

AMSC N/A
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 15 FEB 1956 REVISED (D) 10 AUGUST 1988

P.A. NAVY — AS Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
USAF - 99	(D)	BOLT, CLUSTER FITTING, DOUBLE PORT, FLARELESS	MS21940
PROCUREMENT SPECIFICATION: MIL-F-18280		SUPERSEDES: MS21940 (ASG) (D)	SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 22000

PROJECT NO. 4730-0984

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:42Z
Check the source to verify that this is the current version before use.