
AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.
REVIEWER SYMBOLS: "Review/user information is current as of the date of this document. For future coordination of changes to this document, draft amendments should be based on the information in the current DODISS."
USER SYMBOLS:

FED. SUP CLASS 5925

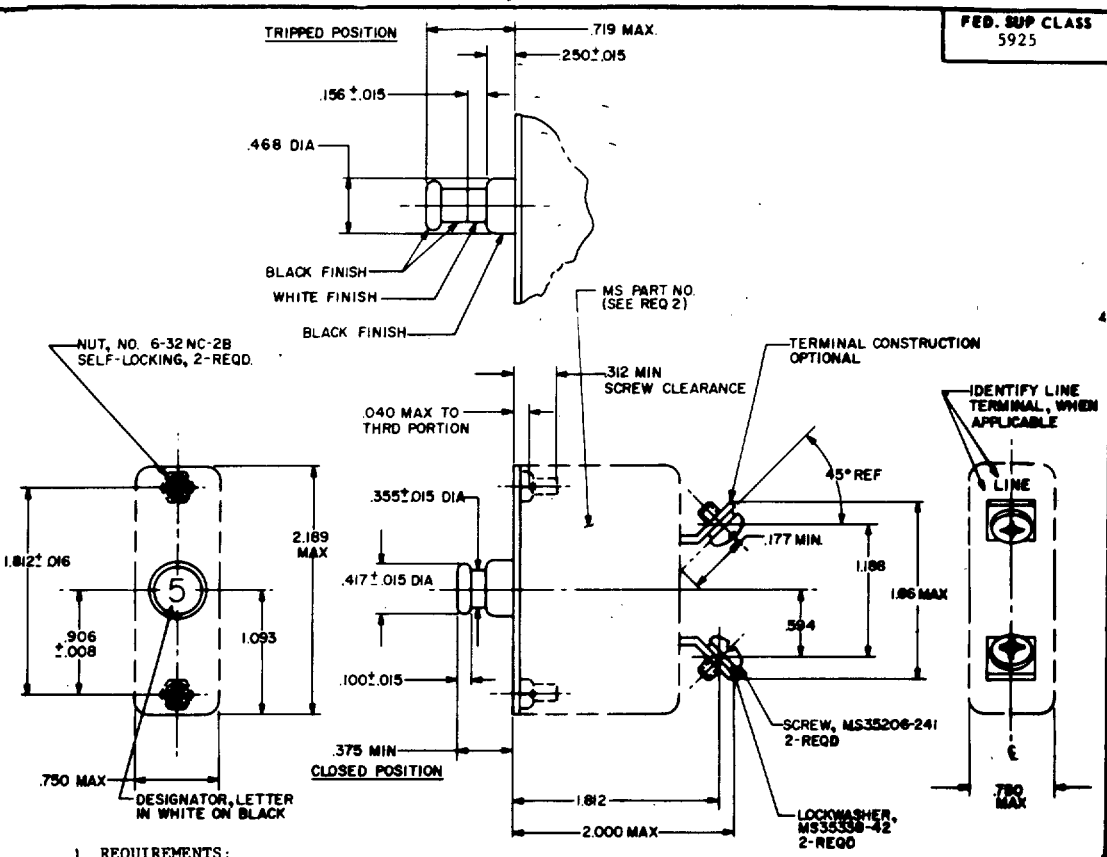

) REQUIREMENTS:

1. TRIP FREE REQUIREMENTS SHALL BE IN ACCORDANCE WITH MIL-C-5809.
2. THE FOLLOWING ADDITIONAL NOTE SHALL BE STAMPED ON THE SIDE OF THE CIRCUIT CASE, "MAY BE USED IN PLACE OF MS25005 BREAKERS BUT MUST BE REPLACED WITH MS25017 BREAKERS."

NOTES:

1. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCE: DECIMALS ±.031; ANGLES ±2°.
2. PHANTOM LINES INDICATE THAT CONTOUR IS OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED.
3. MS 25017-5 THRU MS 25017-35 INACTIVE FOR NEW DESIGN AFTER 1 JUNE 1968. NO SUPERSEDING STANDARD. SEE TABLES I, II & III SHEET 2.
4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THE STANDARD SHALL TAKE PRECEDENCE.
5. VOLTAGE RATING: 28VDC NOMINAL OR 115V 400 HZ NOMINAL.

CERTAIN PROVISIONS OF THIS STANDARD ARE SUBJECT OF INTERNATIONAL AGREEMENT ASCC 12/3. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

(J) **CANCELLED AFTER 30 NOV 87 SUPERSEDED BY MS25244-PT.**

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

(J) DENOTES CHANGES

APPROVED 11 JULY 52 REVISED (J) 30 NOV 1987

P.A. NAVY-AS Other Cust ARMY-ER USAF-85	INTERNATIONAL INTEREST (SEE NOTE)	TITLE: CIRCUIT BREAKER, TRIP-FREE, PUSH-PULL, 5 TO 50 AMP, TYPE I	MILITARY STANDARD MS 25017
PROCUREMENT SPECIFICATION: MIL-C-5809	SUPERSEDES: MS25005		SHEET 1 OF 2

DD FORM 1 SEP 71 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17709
PROJECT NO. 5925-0102

ENGINEERING SPECIFICATIONS AND STANDARDS DEPARTMENT DATE

☆ U.S. GOVERNMENT PRINTING OFFICE: 1988 505-033/90384

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.