
FED SUP CLASS
5340

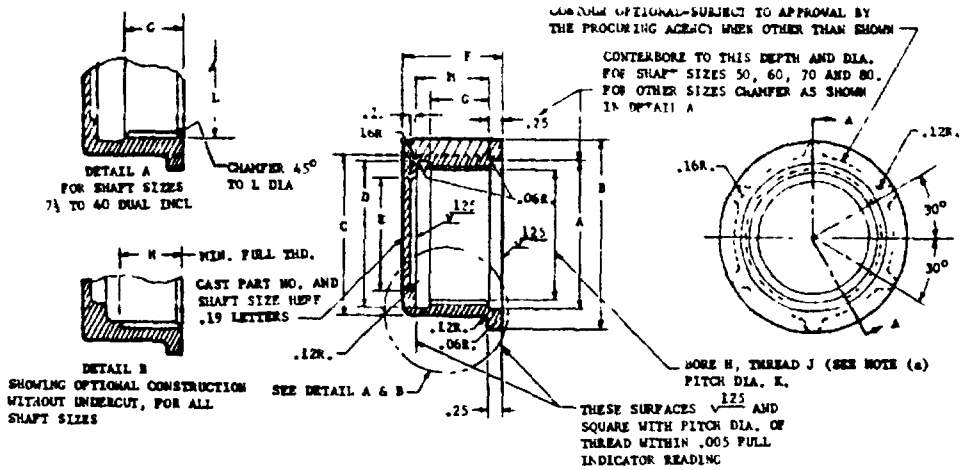

SECTION A-A

MS PART NO	AN SHAFT NO.	A DIA.	B DIA.	C DIA.	(b) D DIA.	E DIA	F	G MIN.	H DIA	THREAD J (REF)	K DIA.	L DIA ± .010	M	N
MS27417-7½	7½	-	2.31	1.81	1.50	.81	1.43	.68		(a) 1.375-12N-2		1 40	1 18	92
MS27417-10	10	-	2 62	2 12	1.81	1 12	1 37	.62	1 5973 +.0080 -.0000	1 6875-12NS-2	1 6334 +.0077 -.0000	1 71	1 12	92
MS27417-20	20	-	3.00	2 50	2 19	1 50	1.61	86	1 9723 +.0090 -.0000	2.0625-12NS-2	2 0084 +.0083 -.0000	2 08	1 36	.99
MS27417-30	30	-	3.25	2.75	2.44	1.75	1.59	.84	2 2223 +.0090 -.0000	2.3125-12NS-2	2 2584 +.0083 -.0000	2 33	1 34	1 01
(c) MS27417-40	40	-	3 75	3.25	2 94	2.25	1.59	.84	2 7223 +.0090 -.0000	2.8125-12NS-2	2 7584 +.0083 -.0000	2 83	1 34	1 01
(d) MS27417-D40	40 DUAL	-	3.75	3.25	2 94	2.25	2 14	1 33	2.7223 +.0090 -.0000	2.8125-12NS-2	2 7584 +.0083 -.0000	2 83	1 09	1 33
MS27417-50	50	3.59	4 44	3 94	3.56	2 75	2 06	1.00	3 3473 +.0090 -.0000	3 4375-12NS-2	3 3834 +.0089 -.0000	-	1 81	1 36
MS27417-60		4.33	5 19	4.69	4.36	3 50	2 31	1 25		(a) 4 250-8N-2		-	2 06	1 55
MS27417-70	70	5 14	6.12	5 62	5 19	4 12	2.31	1.25	4 9897 +.0145 -.0000	5 125-8NS-2	5 0438 +.0140 -.0000	-	2 06	1 55
MS27417-80	80	6.02	7 00	6.50	6.06	5 12	2 36	1.31		(a) 6 000-8N-2		-	2 12	1 55

MATERIAL: Aluminum Alloy, Spec. QQ-A-591.
Magnesium, Spec QQ-M-30
Zinc Base Die Casting Alloy, Spec QQ-Z-363
Phenolic, Molded Plastic, Spec. L-P-310, Type XI
Cellulose Acetate Butyrate, Spec L-P-349, Type I, Class M1

FINISH: Aluminum Alloy - Anodize per Spec MIL-A-8625, Type II
Magnesium, Corrosion Protection per Spec. MIL-M-3171, Type V.

(a) Unless otherwise specified, threads shall be in accordance with Handbook H-28
(b) Dimension D may be same as minor diameter of thread, in which case, additional full thread shall be represented by dimension N in detail B.
(c) This cap may be used on a size 40 dual rotating shaft end when AN5022 Collar and AN5023 Nut is not used
(d) This cap must be used on a size 40 dual rotating shaft end with AN5022 Collar and AN5023 Nut
Identification marking shall be in accordance with MIL-STD-130
Marking for shipment shall be in accordance with MIL-STD-129
MS27417 items are universally interchangeable with AN5012 items of like dash numbers
Unless otherwise specified, dimensions in inches Tolerances Decimals ± .02, Angles ± 1/2°,
Rough Casting ± .03
Shaft End design Standard AND10152
Break all sharp edges and remove burrs
For design feature purposes this standard takes precedence over documents referenced herein
Referenced documents shall be of the issue in effect on date of invitation for bid

APPROVED 30 JUNE 1965 REVISED

P.A. AIR FORCE - 69 Other Cust ARMY - MO NAVY - WP	TITLE CAP-PROPELLER SHAFT THREAD, SHIPPING	MILITARY STANDARD MS 27417
PROCUREMENT SPECIFICATION NONE	SUPERSEDES AN5012	SHEET 1 OF 1

DD FORM 1 OCT 61 672-1 (Coordinated)

EDITION OF 1 SEP 57 MAY BE USED

User Activity

Activity
orce - 69
ARMY - MO
NAVY - WP

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:24Z
Check the source to verify that this is the current version before use.