
FED. SUP CLASS
4730

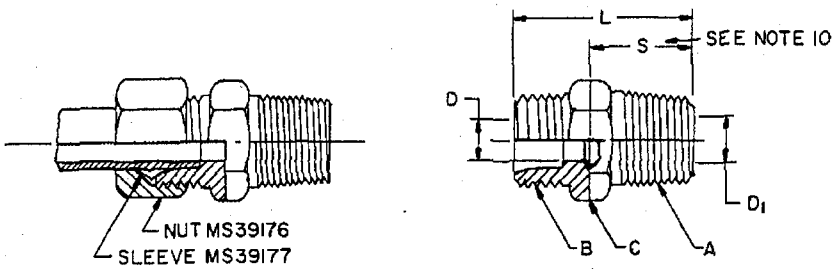

DASH NUMBER *ASSY	DASH NUMBER **BODY	TUBE O.D.	A PIPE THREAD NPTF	B STRAIGHT THREAD	C HEX FLAT NOM	D DIA DRILL	D_1 DIA DRILL	L ±.03	S MAX
11	1	1/8	1/8	5/16-24UNF-2A	7/16	.094	.219	.79	0.46
12	2	3/16	1/8	3/8 -24UNF-2A	7/16	.125	.219	.85	0.48
13	3	1/4	1/8	7/16-24UNS-2A	7/16	.188	.219	.88	0.48
14	4	5/16	1/8	1/2 -24UNS-2A	1/2	.250	.234	.91	0.42
15	5	3/8	1/4	9/16-24UNEF-2A	9/16	.312	.344	1.16	0.67
16	6	7/16	1/4	5/8 -24UNEF-2A	5/8	.312	.344	1.19	0.67
17	7	1/2	3/8	11/16-20UN-2A	11/16	.406	.406	1.22	----
18	8	5/8	1/2	13/16-18UNS-2A	7/8	.500	.562	1.50	0.88
19	9	3/4	1/2	1-18UNS-2A	1	.562	.562	1.62	----

* *THESE ITEMS PREFERRED FOR NEW DESIGN.*
** THESE ITEMS INACTIVE FOR NEW DESIGN AFTER 17 MAY 79.

NOTES:

1. MATERIAL: Brass shall be in accordance with SAE CA360 (half-hard), SAE CA345, or SAE CA350 for bar or extruded stock and SAE CA377 for forgings.
2. PROTECTIVE COATING: None.
3. DIMENSIONS AND TOLERANCES: Dimensions and tolerances not shown shall be in accordance with SAE Standard for Tapered Sleeve (Compression) Type Tube Fittings (SAE J512).
4. THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS39168-11.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. The illustration is for identification and is not intended to restrict designs or shapes not dimensioned.
9. Not recommended for applications within air line systems. For air line system requirements use applicable MS39178 thru MS39197.
10. At manufacturer's option, through passages may conform with smaller diameter specified or the appropriate end may be counterbored to larger diameter for depth S.

Ⓕ CANCELLED -For Procurement Use J512

APPROVED 3 APR 62 REVISED Ⓐ 27 FEB 67 Ⓑ 23 OCT 68 Ⓒ 31 OCT 69 Ⓓ 30 JAN 70 Ⓔ 17 MAY 76 Ⓕ 24 OCT 86

REVIEWER: CS, GL, ME, MI
USER: AT, AV

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AR Other Cust	TITLE ADAPTER, STRAIGHT, PIPE TO TUBE, MALE PIPE END-TAPERED SLEEVE (COMPRESSION) TYPE, AUTOMOTIVE	MILITARY STANDARD MS39169
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: CNAX6 in part, CNAX12 in part.	SHEET 1 OF 1

DD FORM 1 SEP 87 672-1 (Coordinated) AMSC/NA

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-0822

Source: https://assist.dla.mil -- Downloaded: 2
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:47Z
Check the source to verify that this is the current version before use.